

WAAS CH 86734 W09A	APP CRS 093°	Rwy Ldg TDZE 798 Apt Elev 809
--	------------------------	---


RNAV (GPS) RWY 9
WITTMAN RGNL (OSH)

RNP APCH - GPS.

▼ Rwy 9 helicopter visibility reduction below ¾ SM NA. Circling Rwy 5, 23, 31 NA at night.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° C or above 54° C.
VDP and Baro-VNAV NA when using FLD altimeter setting. When local altimeter setting not received, use FLD altimeter setting: increase LPV DA to 1094 feet; increase LNAV/VNAV DA to 1174 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ½ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
PRIMO and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5(CTAF) 290.9	GND CON 132.3	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

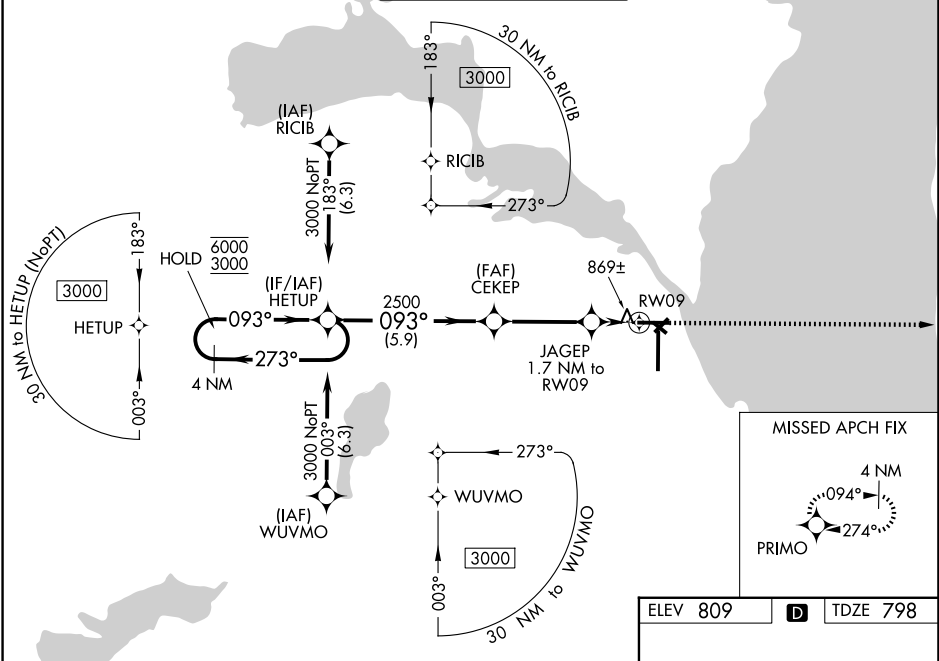

MISSED APCH FIX

PRIMO

4 NM

094°

274°

4 NM Holding Pattern		HETUP		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).		3000		PRIMO	
6000 ← 273°		093° →		CEKEP 2500		JAGEP 1.7 NM to RW09			
GP 3.00° TCH 50		2500		1380		1.2 NM to RW09		RW09	
		5.9 NM		3.5 NM		0.5		1.2 NM	
CATEGORY	A	B	C	D					
LPV DA	1061-7/8 263 (300-7/8)								
LNAV/VNAV DA	1141-1 343 (400-1)								
LNAV MDA	1220-1 422 (500-1)		1220-1 1/4 422 (500-1 1/4)						
CIRCLING	1280-1 471 (500-1)		1300-1 491 (500-1)		1360-1 1/2 551 (600-1 1/2)		1440-2 631 (700-2)		

ELEV 809 D TDZE 798

TWR

REIL Rwy 18 and 27

HIRL Rwy 9-27 and 18-36

EC-3, 29 OCT 2026 to 26 NOV 2026

EC-3, 29 OCT 2026 to 26 NOV 2026