

HI-ILS or LOC RWY 10R

LOC/DME I-PDX 110.5 Chan 42	APCH CRS 103°	Rwy Idg 11,000 TDZE 24 Arpt Elev 31
---	-------------------------	--

[USAF]

PORTLAND INTL (KPDX)

DME required.



* When ALS inop, increase RVR to 40 and vis to ¾ mile.



MISSED APPROACH: Climb to 1100 then climbing right turn to 5000 on BTG VORTAC R-160 to MULES/BTG 17.7 DME and hold, continue climb-in-hold to 5000.


ATIS 128.35 269.9	APP CON 118.1 284.6 (100°-279°) 124.35 299.2 (280°-099°)	TOWER 118.7 257.8 Rwy 10L-28R 123.775 251.125 Rwy 3-21, 10R-28L	GND CON 121.9 348.6	CLNC DEL 120.125 318.1
-----------------------------	--	--	-------------------------------	----------------------------------

** When ALS inop, increase CAT CDE RVR to 60 and vis to 1½ miles.
*** When VGSI rwy 28R inop, circling rwy 28R NA at night.
Simultaneous approach authorized.

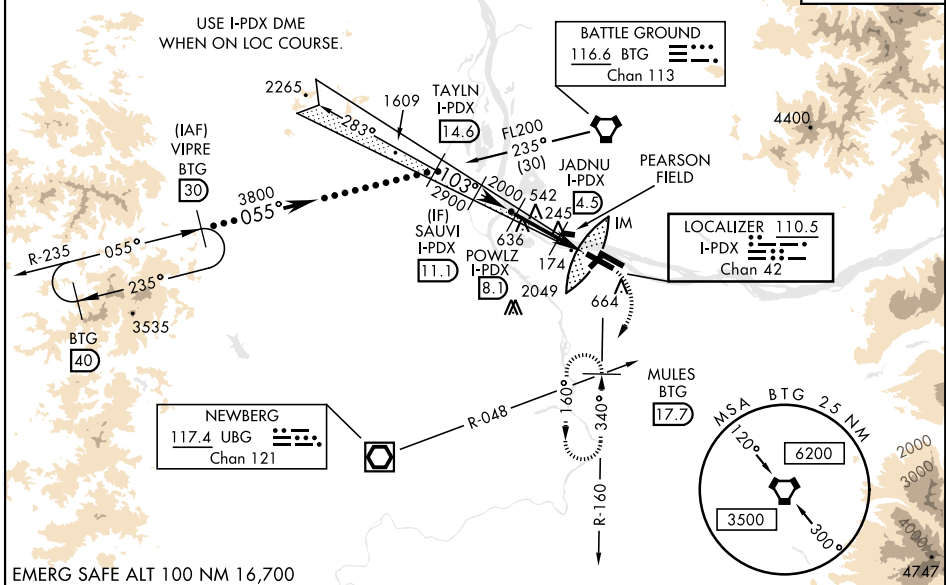

EMERG SAFE ALT 100 NM 16,700

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).			1100	5000	MULES BTG 17.7	ELEV 31	TDZE 24
VIPRE BTG 30			I-PDX 14.6	SAUVI I-PDX 11.1	POWLZ I-PDX 8.1	JADNU I-PDX 4.5	LOC DME
FL200			3800	2900	2000	860	IM
GS 3.00° TCH 53			3.6 NM	2.4 NM	0.1		
CATEGORY	C	D	E				
S-ILS 10R*	224/18	200	(200-¾)				
S-LOC 10R**	440/40	416	(500-¾)				
CIRCLING***	1060-3	1029	(1100-3)	1140-3	1109	(1200-3)	

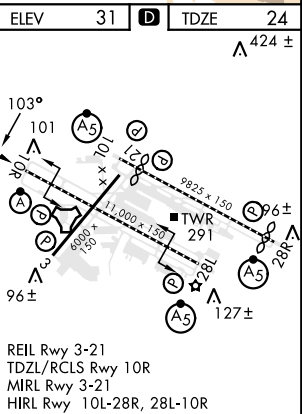

HI-ILS or LOC RWY 10R