RNAV (GPS) RWY 29

SWINTON SMITH FLD AT REIDSVILLE MUNI (RVJ)

WAAS CH 42547 W29A	APP CRS 294°	Rwy Ldg 5003 TDZE 196 Apt Elev 196


RNP APCH - GPS.

RADAR required for procedure entry when R-3005 A/B/C/E active.


T A Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Hold-in-lieu NA when R-3005 A/B/C/E active.

MISSED APPROACH: Climb to 3000 direct FEVNA and hold, continue climb-in-hold to 3000.

AWOS-3PT	JACKSONVILLE CENTER	CTAF
128.325	127.575 269.025	122.9 L

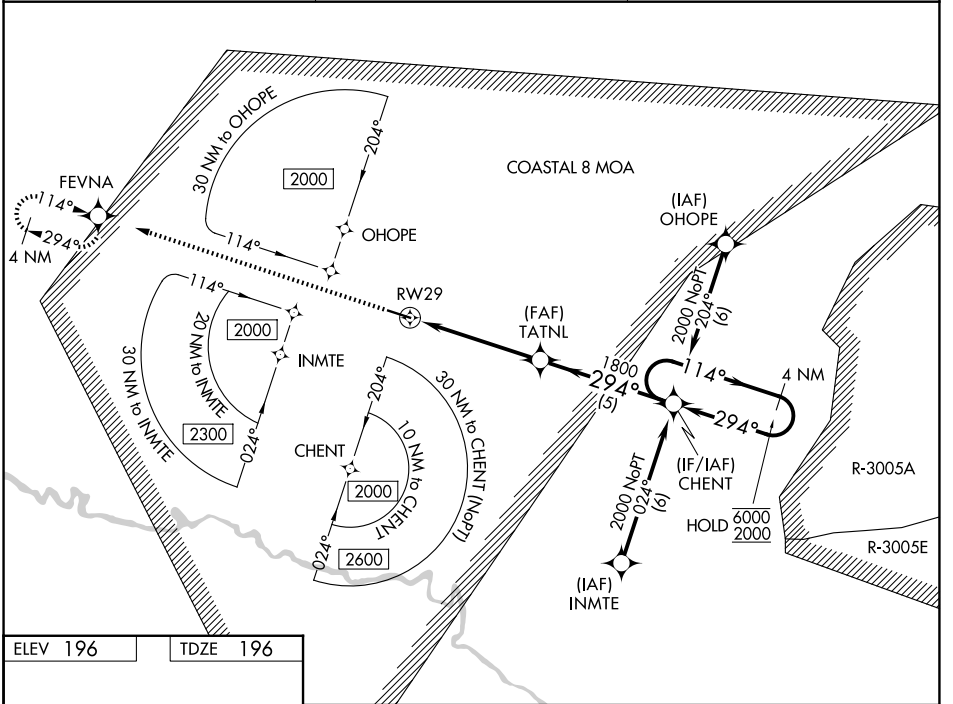

ELEV 196 TDZE 196

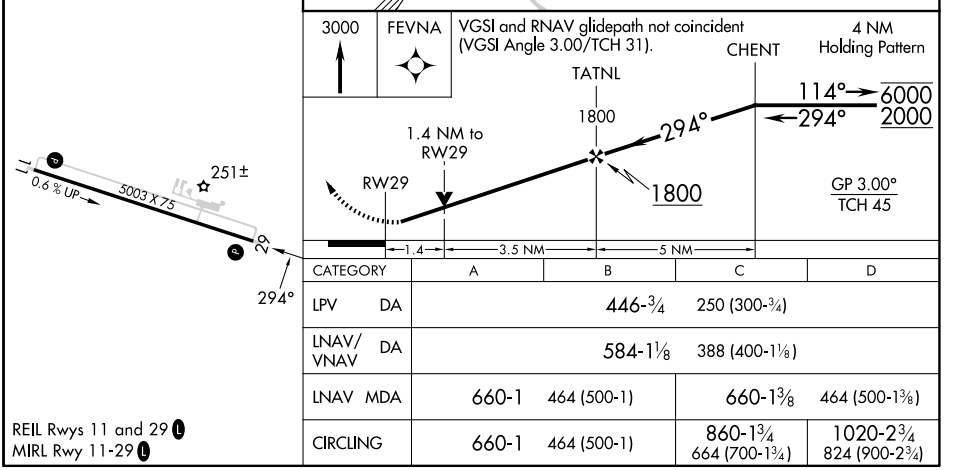

CATEGORY		A	B	C	D
LPV	DA	446-¾	250 (300-¾)		
LNAV/VNAV	DA	584-1⅛	388 (400-1⅛)		
LNAV	MDA	660-1	464 (500-1)	660-1⅜	464 (500-1⅜)
CIRCLING		660-1	464 (500-1)	860-1¾ 664 (700-1¾)	1020-2¾ 824 (900-2¾)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

SE-4, 29 OCT 2026 to 26 NOV 2026