



APP CRS	Rwy Ldg	12000
164°	TDZE	4226
	Apt Elev	4231

RNAV (RNP) Z RWY 16R
SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS. Authorization required. From BEKAY or CAMDI: RF.	ALSF-2	MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 direct STACO and hold. *Missed approach requires minimum climb of 339 feet per NM to 4680.
 For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.10* all Cats visibility to RVR 4000, and increase RNP 0.30 all Cats visibility to RVR 5500.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 132.65 336.4	GND CON 123.775 348.6
--------------------------	---------------------------------------	--------------------------------------	--------------------------

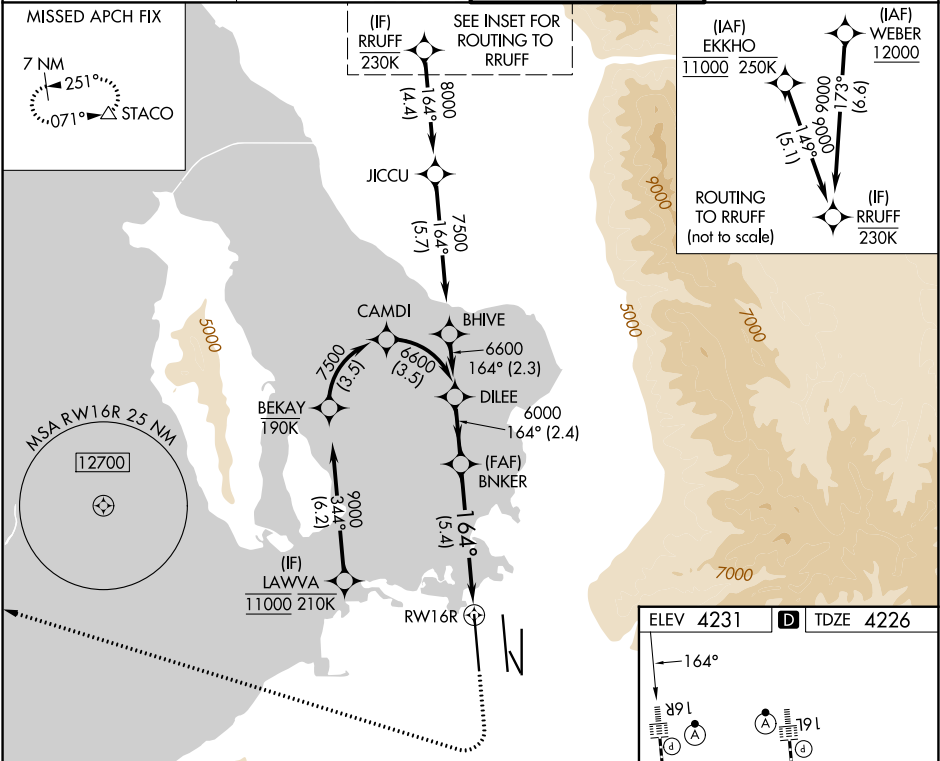

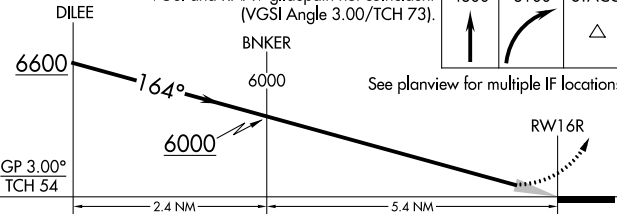VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).				4800	8100	STACO
				See planview for multiple IF locations.		
GP 3.00° TCH 34						
CATEGORY	A	B	C	D		
RNP 0.10 DA*	4481/24		255 (300-½)			
RNP 0.30 DA	4597/35		371 (400-¾)			
AUTHORIZATION REQUIRED						

