
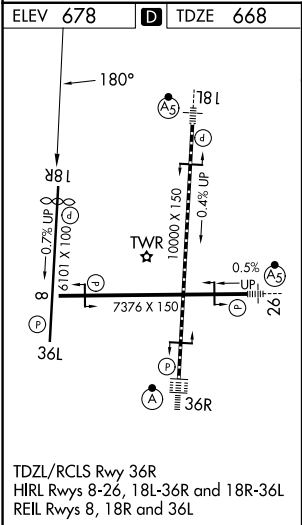


WAAS CH 69614 W18B	APP CRS 180°	Rwy Ldg 5141 TDZE 668 Apt Elev 678
--	------------------------	---

RNAV (GPS) RWY 18R
TULSA INTL (TUL)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3500 direct SUSNE and hold.
 Circling NA for Cat E south of Rwy 8-26. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.	ASR	

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (08/26, 18L/36R) 118.7 257.8 (18R/36L)	GND CON 121.9 348.6
------------------------------	-------------------------------------	--	-------------------------------

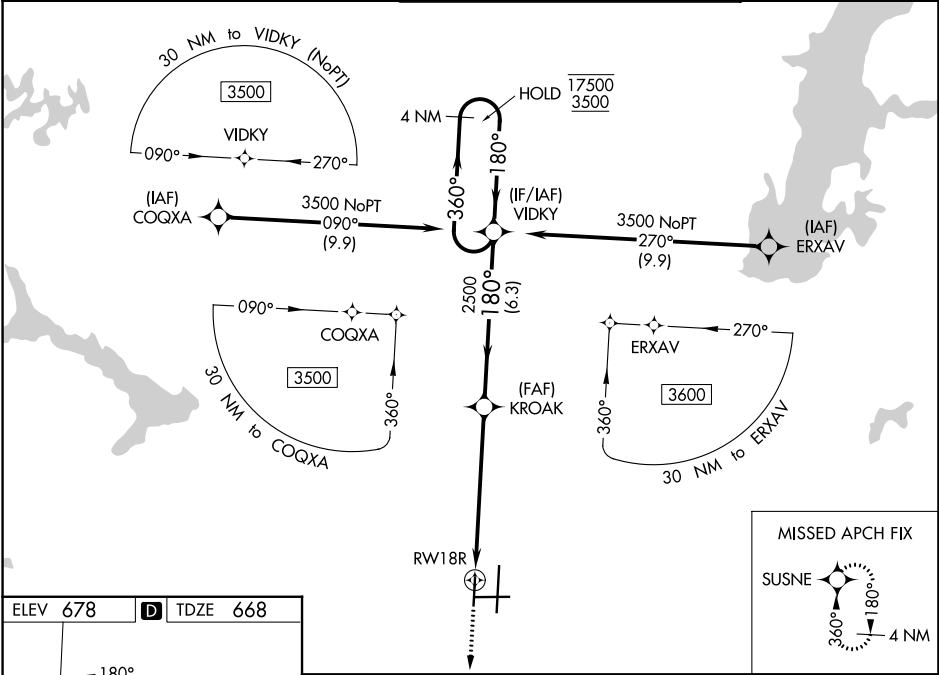

3500 SUSNE		VIDKY Holding Pattern	
1.7 NM to RWY 18R		KROAK 2500	
1.7 NM		4.5 NM	
CATEGORY		A	
LPV DA		868-3/4 200 (200-3/4)	
LNAV/VNAV DA		954-7/8 286 (300-7/8)	
LNAV MDA		1180-1 512 (600-1)	
CIRCLING		1180-1 502 (600-1)	