

LOC/DME I-SKC 109.5 Chan 32	APP CRS 103°	Rwy Ldg 6250 TDZE 901 Apt Elev 912	ILS or LOC RWY 10 WAUKESHA COUNTY (U/S)
---	------------------------	---	--


RADAR required for procedure entry.

⚠ VDP NA when using MWC altimeter setting. For inop ALS, increase S-LOC 10 Cats C and D visibility to 1½ SM. When local altimeter setting not received, use MWC altimeter setting and increase S-ILS 10 DA to 1149 feet; increase all MDAs 60 feet and S-LOC 10 visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct BAE VOR/DME and hold, continue climb-in-hold to 2800.

ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

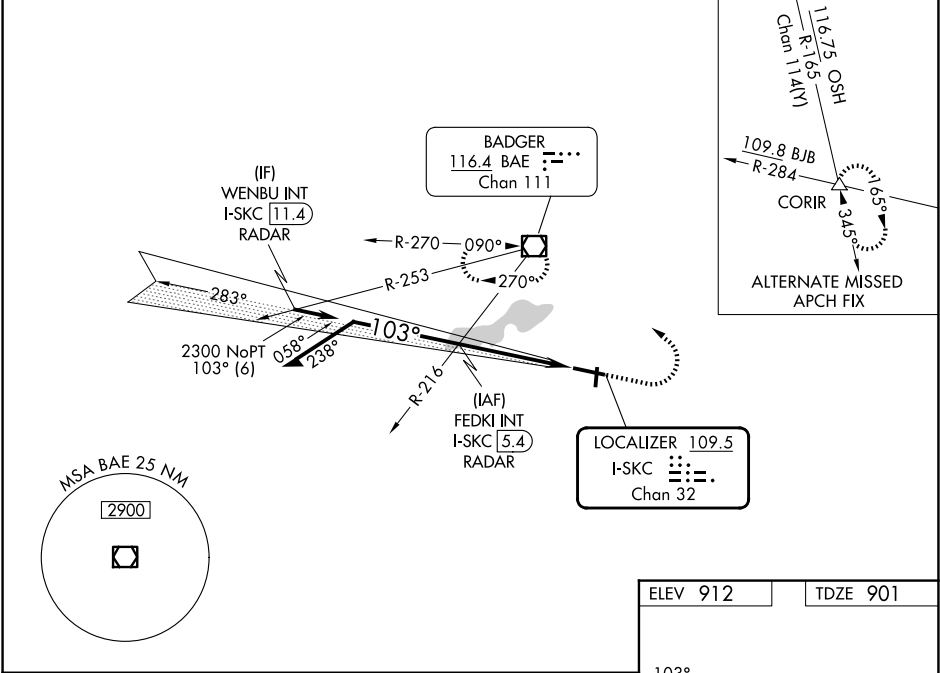

Remain within 10 NM

2800 283° 103° 2300

GS 3.00° TCH 53

2.8 NM 1.5 NM

CATEGORY	A	B	C	D
S-ILS 10	1101-½ 200 (200-½)			
S-LOC 10	1460-½	559 (600-½)	1460-1	559 (600-1)
CIRCLING	1460-1 548 (600-1)	1500-1 588 (600-1)	1540-1¾ 628 (700-1¾)	1640-2¼ 728 (800-2¼)

ELEV 912 TDZE 901

103° 81 36 3590 X 715 6250 X 100 TWR

HIRL Rwy 10-28 0

MIRL Rwy 18-36 0

REIL Rwy 18, 28 and 36 0

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24