

WAAS CH 77523 W17A	APP CRS 166°	Rwy Ldg 13052 TDZE 2830 Apt Elev 2885
--	------------------------	--

RNAV (GPS) RWY 17


SOUTHERN CALIFORNIA LOGISTICS (VCO)

RNP APCH - GPS.


A Circling NA for Cats C and D southeast of Rwy 35-21. Baro-VNAV and VDP NA when using Edwards AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Edwards AFB altimeter setting: increase LPV DA to 3183 feet and all visibilities to RVR 5500; increase LNAV/VNAV DA to 3233 feet and all visibilities to RVR 6000. Increase all MDAs 160 feet and Circling visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 3500 then
climbing right turn to
6000 direct RLONG
and on track 294° to
ETHER and hold.


ATIS 135.475	JOSHUA APP CON 124.55 363.0	VICTORVILLE TOWER★ 118.35 (CTAF) 0 282.225	GND CON 124.45
------------------------	---------------------------------------	--	--------------------------

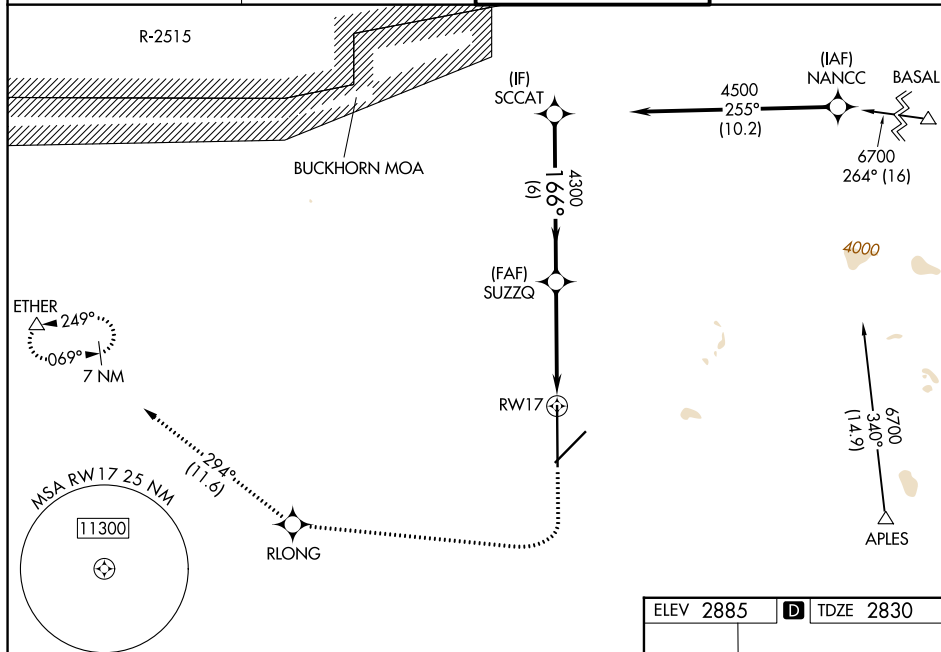

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 81).

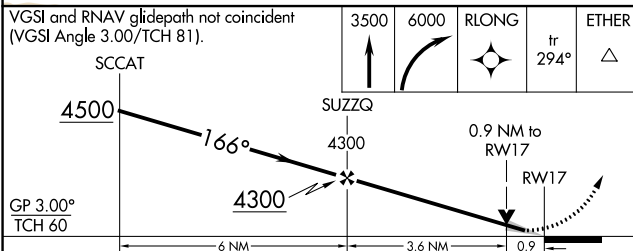

CATEGORY		A	B	C	D
LPV	DA	3030/40 200 (200-¾)			
LNAV/ VNAV	DA	3080/40 250 (200-¾)			
LNAV	MDA	3180/55 350 (300-1)			
CIRCLING		3380-1 495 (500-1)	3420-1 535 (600-1)	3460-1½ 575 (600-1½)	3780-3 895 (900-3)

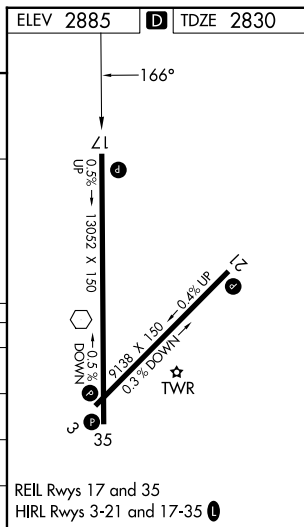

RNAV (GPS) RWY 17