

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>78100</b><br><b>W23A</b> | APP CRS<br><b>226°</b> | Rwy Ldg <b>4200</b><br>TDZE <b>21</b><br>Apt Elev <b>21</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 23

TAMPA EXEC (VDF')

RNP APCH-GPS.

▼


▲

Inop table does not apply to LPV and LNAV Cat A/B. Baro-VNAV NA when using Tampa Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 323 feet, LNAV/VNAV DA to 513; increase all MDAs 40 feet, and LNAV and Circling Cat C visibilities ¼ SM. Circling Rwy 18, 36 NA at night.

MALSRL

MISSED APPROACH:  
Climb to 800 then climbing left turn to 2700 direct to LAL VORTAC and hold.

|                          |                                       |                                        |
|--------------------------|---------------------------------------|----------------------------------------|
| AWOS-3<br><b>121.125</b> | TAMPA APP CON<br><b>120.475 290.3</b> | UNICOM<br><b>122.7</b> (CTAF) <b>0</b> |
|--------------------------|---------------------------------------|----------------------------------------|

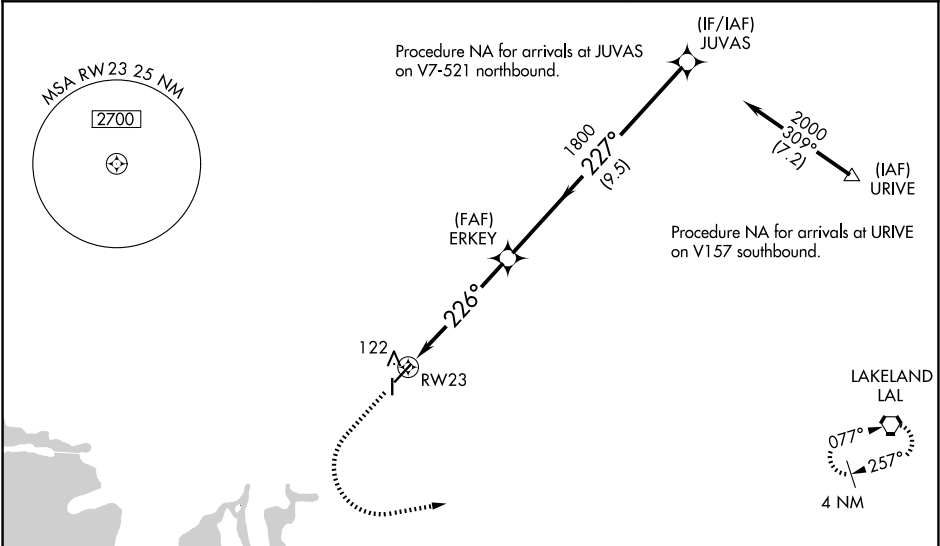

ELEV 21 TDZE 21

226°

800

2700

LAL

800

2700

LAL

800

2700

LAL

REIL Rwys 5, 18, and 36  
MRL Rwys 5-23 and 18-36

|                                                                                                                                                                                                                                                                                                                                                                                                          |                      |                      |                        |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|------------------------|----|
| <div><div>800<br/>↑</div><div>2700<br/>↖</div><div>LAL<br/></div></div> <div><div><div>ERKEY<br/>1800</div><div>JUVAS<br/>Procedure Turn NA</div></div><div><div>RW23<br/>↖</div><div>226°</div><div>227°</div><div>1800</div><div>GP 3.10°<br/>TCH 40</div></div><div><div>5.3 NM</div><div>9.5 NM</div></div></div> |                      |                      |                        |    |
| CATEGORY                                                                                                                                                                                                                                                                                                                                                                                                 | A                    | B                    | C                      | D  |
| LPV DA                                                                                                                                                                                                                                                                                                                                                                                                   | 298-1                | 277 (300-1)          |                        | NA |
| LNAV/ VNAV                                                                                                                                                                                                                                                                                                                                                                                               | 488-1½               | 467 (500-1½)         |                        | NA |
| LNAV MDA                                                                                                                                                                                                                                                                                                                                                                                                 | 560-1                | 539 (600-1)          |                        | NA |
| CIRCLING                                                                                                                                                                                                                                                                                                                                                                                                 | 560-1<br>539 (600-1) | 760-1<br>739 (800-1) | 800-2¼<br>779 (800-2¼) | NA |