


1 Composite reliability (CR)

Construct	CR	AVE	ω	α
visual	.61	.37	.61	.63
textual	.89	.72	.89	.88
speed	.69	.42	.69	.69

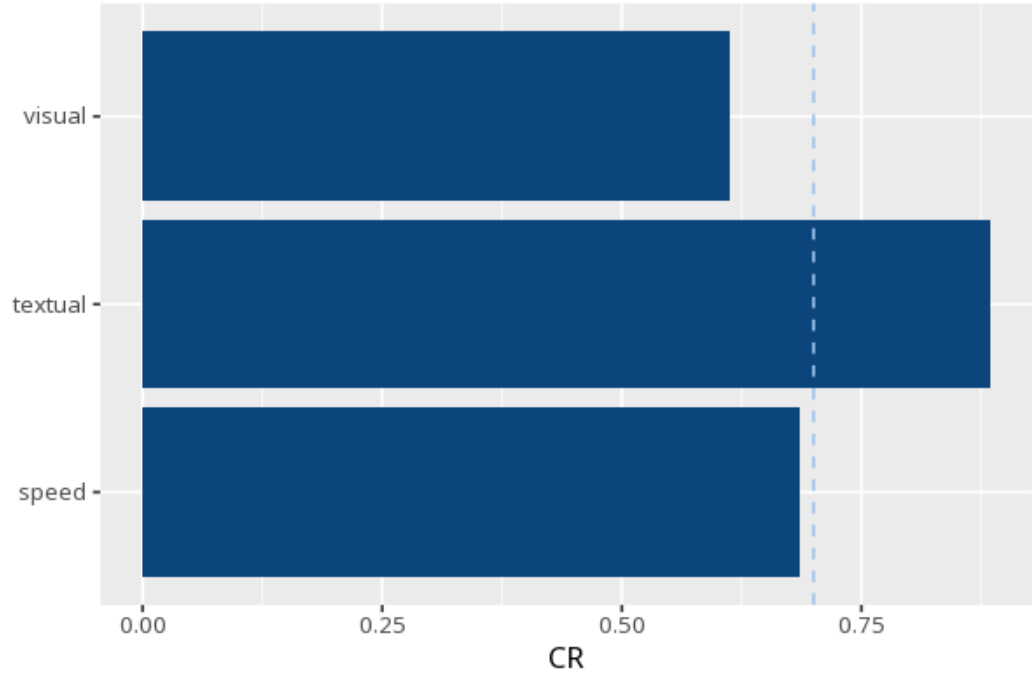

CR (Composite Reliability) measures how reliably a set of items captures its construct (0–1); $\geq .70$ is the conventional threshold (Nunnally, 1978; Bagozzi & Yi, 1988). CR is computed from the CFA loadings via `semTools::compRelSEM()` — for a congeneric (unidimensional) factor CR equals McDonald’s ω , so the two columns will always match. AVE is shown alongside for quick convergent-validity reference ($\geq .50$; Fornell & Larcker, 1981) — for the full discriminant-validity assessment (Fornell–Larcker + HTMT matrices) run the AVE card. α (Cronbach’s) is a secondary/legacy coefficient — it assumes tau-equivalence (equal loadings) and is a lower bound when loadings differ (McNeish, 2018). All cutoffs are labelled guidelines, not pass/fail gates. Applies to reflective constructs only.

Composite reliability was satisfactory (CR = .__ $\geq .70$).