Sprint 3 Peer Test
Reviewing NAT/PAT

Screenshot 1 KFP-IT-PC01 (VLAN 10) successful ping to temp PC connected to R1:

```
C:\>ping 203.0.113.10

Pinging 203.0.113.10 with 32 bytes of data:

Reply from 203.0.113.10: bytes=32 time=12ms TTL=125
Reply from 203.0.113.10: bytes=32 time=11ms TTL=125
Reply from 203.0.113.10: bytes=32 time=16ms TTL=125
Reply from 203.0.113.10: bytes=32 time=5ms TTL=125

Ping statistics for 203.0.113.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 5ms, Maximum = 16ms, Average = 11ms


C:\>
```

Screenshot 2 KFP-R1 showing translations and statistics after ping from KFP-IT-PC01:

```
KFP-R1#show ip nat translations
Pro  Inside global     Inside local       Outside local      Outside global
icmp 203.0.113.1:10    10.20.10.100:10    203.0.113.10:10    203.0.113.10:10
icmp 203.0.113.1:11    10.20.10.100:11    203.0.113.10:11    203.0.113.10:11
icmp 203.0.113.1:12    10.20.10.100:12    203.0.113.10:12    203.0.113.10:12
icmp 203.0.113.1:9     10.20.10.100:9     203.0.113.10:9     203.0.113.10:9

KFP-R1#show ip nat statistics
Total translations: 4 (0 static, 4 dynamic, 4 extended)
Outside Interfaces: GigabitEthernet0/0/0
Inside Interfaces: Serial0/1/0
Hits: 11  Misses: 12
Expired translations: 8
Dynamic mappings:
KFP-R1#
```

Screenshot 3 KFP-FIN-PC01 (VLAN 20) successful ping to temp PC connected to R1:

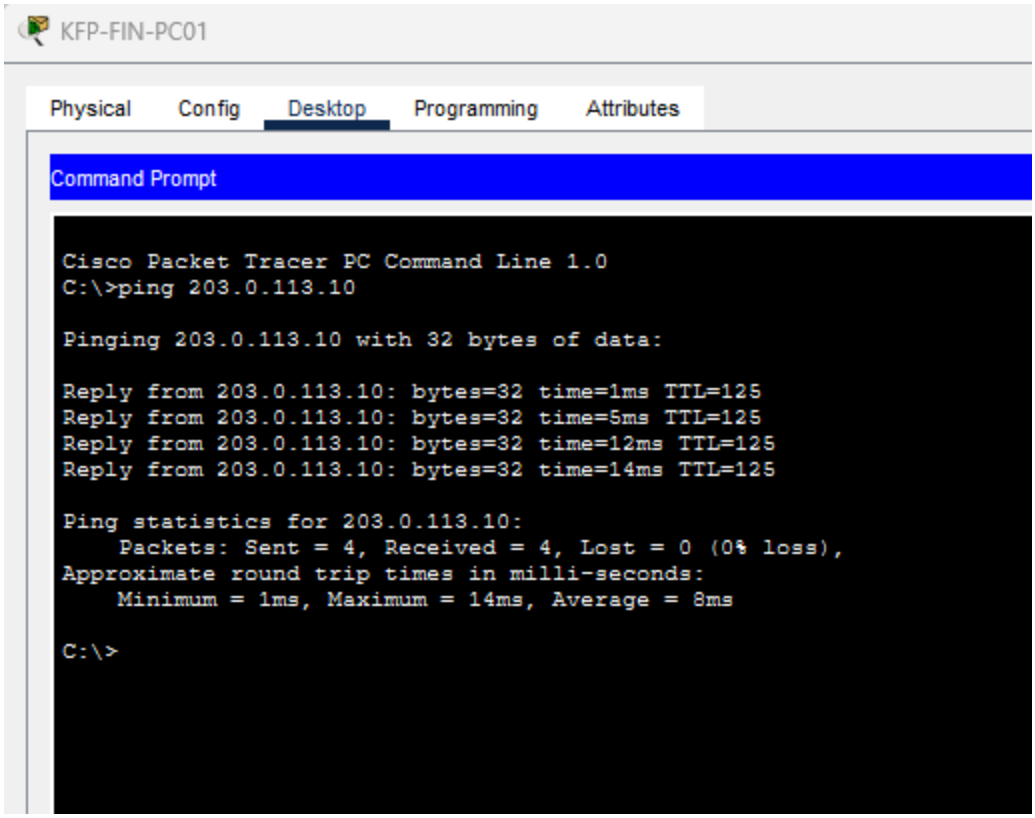


Screenshot 4 Showing successful translations from VLAN 20:

```
KFP-R1#show ip nat translations
Pro  Inside global     Inside local       Outside local      Outside global
icmp 203.0.113.1:5     10.20.20.102:5     203.0.113.10:5     203.0.113.10:5
icmp 203.0.113.1:6     10.20.20.102:6     203.0.113.10:6     203.0.113.10:6
icmp 203.0.113.1:7     10.20.20.102:7     203.0.113.10:7     203.0.113.10:7
icmp 203.0.113.1:8     10.20.20.102:8     203.0.113.10:8     203.0.113.10:8

KFP-R1#show ip nat statistics
Total translations: 4 (0 static, 4 dynamic, 4 extended)
Outside Interfaces: GigabitEthernet0/0/0
Inside Interfaces: Serial0/1/0
Hits: 19  Misses: 20
Expired translations: 16
Dynamic mappings:
KFP-R1#
```

Screenshot 5 KFP-Staff-PC01 (VLAN 30) successful ping to temp PC:

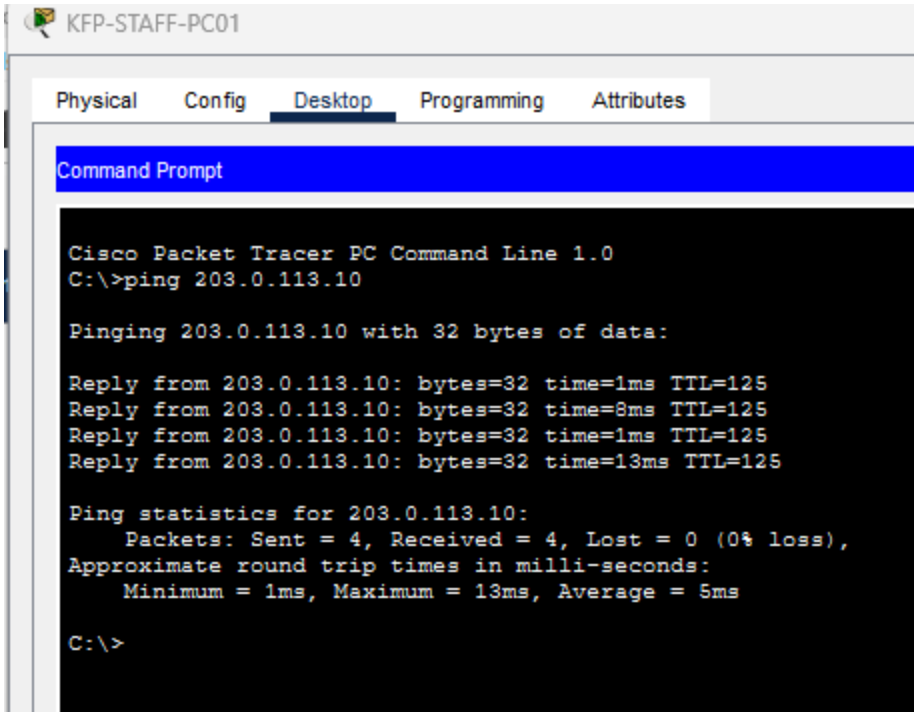


Screenshot 6 Showing successful NAT/PAT translations/statistics for ping:

```
KFP-R1#show ip nat statistics
Total translations: 4 (0 static, 4 dynamic, 4 extended)
Outside Interfaces: GigabitEthernet0/0/0
Inside Interfaces: Serial0/1/0
Hits: 19  Misses: 20
Expired translations: 16
Dynamic mappings:
KFP-R1#show ip nat translations
Pro  Inside global     Inside local       Outside local      Outside global
icmp 203.0.113.1:1     10.20.30.101:1     203.0.113.10:1     203.0.113.10:1
icmp 203.0.113.1:2     10.20.30.101:2     203.0.113.10:2     203.0.113.10:2
icmp 203.0.113.1:3     10.20.30.101:3     203.0.113.10:3     203.0.113.10:3
icmp 203.0.113.1:4     10.20.30.101:4     203.0.113.10:4     203.0.113.10:4

KFP-R1#show ip nat statistics
Total translations: 4 (0 static, 4 dynamic, 4 extended)
Outside Interfaces: GigabitEthernet0/0/0
Inside Interfaces: Serial0/1/0
Hits: 23  Misses: 24
Expired translations: 20
Dynamic mappings:
KFP-R1#
```

Screenshot 7 Showing successful ping to temp PC connected to R1 from wireless client (VLAN 50):

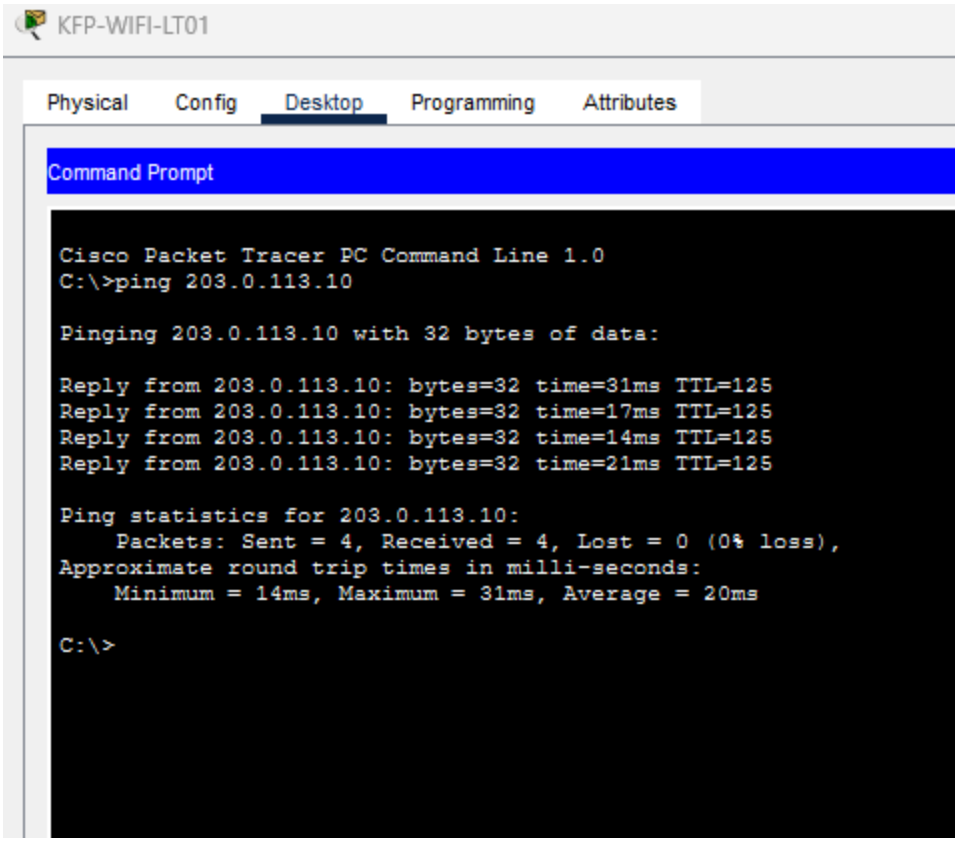

Screenshot showing successful translations/statistics:

```
KFP-R1#show ip nat translations
Pro  Inside global     Inside local       Outside local      Outside global
icmp 203.0.113.1:1     10.20.50.100:1     203.0.113.10:1     203.0.113.10:1
icmp 203.0.113.1:2     10.20.50.100:2     203.0.113.10:2     203.0.113.10:2
icmp 203.0.113.1:3     10.20.50.100:3     203.0.113.10:3     203.0.113.10:3
icmp 203.0.113.1:4     10.20.50.100:4     203.0.113.10:4     203.0.113.10:4

KFP-R1#show ip nat statistics
Total translations: 4 (0 static, 4 dynamic, 4 extended)
Outside Interfaces: GigabitEthernet0/0/0
Inside Interfaces: Serial0/1/0
Hits: 27  Misses: 28
Expired translations: 24
Dynamic mappings:
KFP-R1#
```

Sprint 3 Independent Cross-Testing Confirmation

Tester: Benjamin Popso

Feature / User Story: US-26- External Resource Access (NAT/PAT)

Original Implementer: Matthews Martinez

Date Tested: November 9, 2026

Expected Result: Authorized internal clients from departmental and wireless VLANs can access external resources through R1 using NAT/PAT, with private IP addresses correctly translated to the external interface address.

Actual Result: Successfully verified external connectivity from VLANs 10, 20, 30, and 50 to external host 203.0.113.10. All four tested clients received 4/4 successful ping responses with 0% packet loss. R1's NAT translation table confirmed that internal client addresses were translated to 203.0.113.1 using PAT.

Status: PASS- Outbound NAT/PAT and cross-VLAN external connectivity.

Evidence: See above and the Sprint 3 folder with US-26 screenshots

Notes / Issues: No issues identified in the tested NAT/PAT functionality