


Sure Marine Service™



www.suremarineservice.com

Marine Heating Catalog

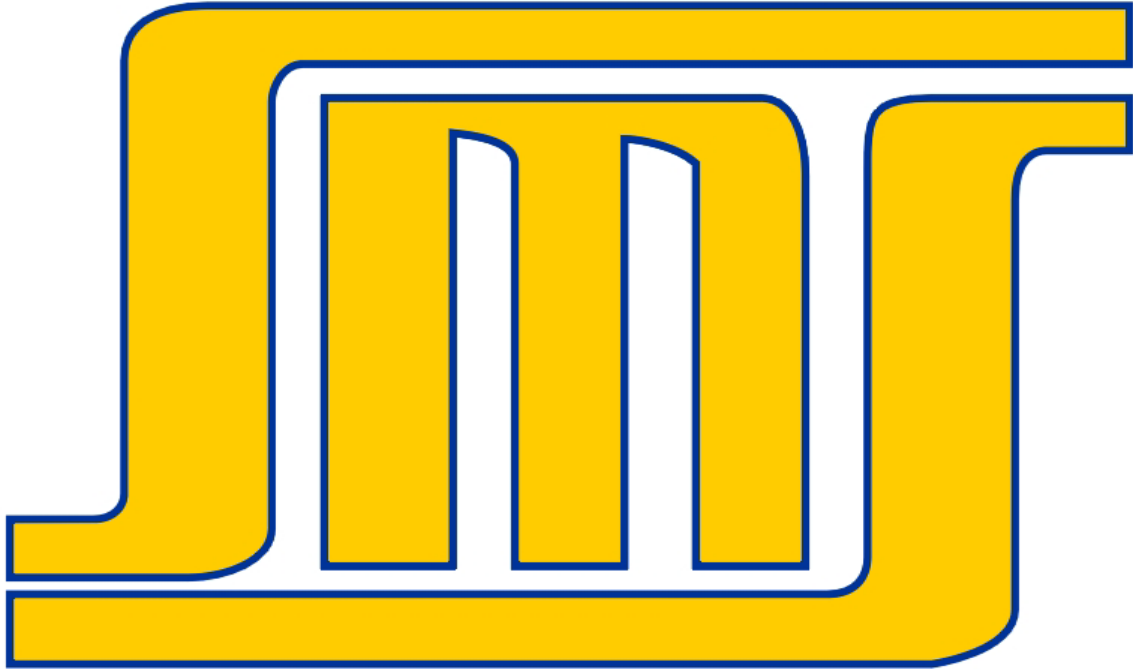

Sure Marine Service, Inc.
5320 28th Ave. N.W.
Seattle, WA 98107
(800) 562-7797 (206) 784-9903

www.SureMarineService.com



Marine Heating Catalog

Introduction	4
Sizing Considerations	4
Air Heaters	5
AT 2000ST and AT40	5
AT55	6
Ducting and Grilles	7
Ducting	7
Figure: Basic Hot Air System	7
Plastic High Temp Parts	8
Grilles	9
Grilles	9
Metal Parts	11
HADS-Hot Air Ducting System	12
Air Outlet System D60	12
Air Outlet System D90	14
Thru-Bulkhead System D90	15
HADS Connection Parts	16
HADS Grill Colors	16
Figure: Example Water Heat Installation	17
Water Heaters	17
Table 2: Water Heater / Boat Size	17
TSL-17 and Thermo Pro 90	18
TTP150	19
E320+	20
REAL Accessories	21
REAL FAN HEATERS AND DEFROSTERS	21
5000 Series Hydronic Defrosters	22
5200-LP Series Low Profile Hydronic Defrosters	23
5200 Series Hydronic Defrosters	24
5200-HO Series High Output Hydronic Defrosters	25
5400 Series Hydronic Defrosters	26
5400-HO Series High Output Hydronic Defrosters	27
6000 Series Hydronic Heaters	28
6200 Series Hydronic Heaters	29
6223-DF Dual Fan Hydronic Heaters	30
6300 Series Toe Space Hydronic Heaters	31

6400 Series Hydronic Heaters	32
8000-LP Series Hydronic Combo Heater/Defrosters	33
8000 Series Hydronic Combo Heater/Defrosters	34
9000-LP Series Dual Blower Hydronic Defrosters	35
9000 Series Dual Blower Hydronic Defrosters	36
Water System	37
Expansion Tanks	37
Figure: Expansion Tank Usage	37
Expansion Tanks	39
Circulation Pumps	39
Circulation Pumps	40
Heat Exchangers	41
Valves, Hose, Additives	42
Valves, Hose, Additives	43
Everhot	44
Seaward	45
Camco	45
Torrid Marine Systems	46
Isotemp Basic, Slim and Square	47
Isotemp SPA Line	48
Electrical System	49
Thermostats	49
Surewire Boards	51
Exhaust System	54
22mm Exhaust	54
24mm Exhaust	55
1 1/2" Exhaust	56
1 1/2" Exhaust	57
2 3/4" Exhaust	58
Exhaust Equipment	59
Fuel Tanks	60
Figure: Example Fuel Tank	60
Fuel system	61
Pickup Tubes	61
Hose and Tube	62
Filters	63

WHY THE RIGHT SIZE IS IMPORTANT

Many factors are involved when choosing the right heater for a particular boat. Merely purchasing a heater based on its compact size for the purpose of “taking the chill off” can be a costly mistake in the long run. A heater that is too small for a boat will work hard to meet the demand called by the thermostat. Even though the heater may only keep the boat at a minimum temperature for comfort, it will run excessively and cause maintenance problems due to wear. Smaller heaters can be attractive in boating because they take up a little less space. Many boaters are willing to accept a small temperature difference in exchange for that extra room, without looking at the extra costs in fuel and maintenance due to over working the heater. The wear that is caused from this excessive running would not be covered under warranty.

Bigger is not always better. Some customers have expressed interest in installing the largest heater possible, thinking it will cut down on operation and wear. If a heater is oversized it will be prone to “short cycle”. Short cycling is when the burner section does not run long enough for its proper heat-up. Like engines, burners must be run up to operating temperature and there is a minimum run time for this to occur. If the burners optimum running temperature is not reached, the unit will run inefficiently and it will be prone to carbon buildup which can lead to extra maintenance.

SIZING A BOAT

Considering these issues, choosing the right heater is obviously very important. Sure Marine Service offers a basic quick reference chart to guide an installer in the right direction. If there is concern about whether or not a heater is right for a boat, there are formulas that can be used to figure out the requirements. The internal volume of the spaces being heated should be multiplied by 12 for a sailboat ((length x width x height) x 12), and by 15 for a powerboat ((length x width x height) x 15). These numbers will give a round number of the BTU requirements, but other factors must be taken into consideration. When considering a heater, the construction of the boat must be considered as well as its size. Windows are sources of heat loss that need to be considered. If a main saloon has multiple windows the amount of heat for that space should be raised. Whether or not a boat is insulated is another factor. If your boat is not well insulated you should raise the heating requirements. Be sure to consider these variables if a boat size rests between heater sizing specifications. We have included tables to assist you in your sizing decision.

LIVE-ABOARDS

Properly sizing a heater for a live-aboard application is crucial. Air heaters should not be used. Since there is no way to store household temperature warm air, an air heating system must fire its burner every time heat is needed. This leads to excessive run times and maintenance issues.

In general, live-aboards and larger boats require a water heating system using a DBW 2010 or above. The DBW series are the only heaters in the Webasto line that we advise for such installations. These systems are designed to maintain a larger supply of hot water which provides a thermal mass to store heat. This cuts down on burner run time while providing good heating system performance.

A properly sized and installed heating system will run better and cost less in the long run. By selecting the right heater for your application the system will work well and the owner will be happy.

AT 2000STC

The **AT2000STC** is the smallest air heater offered by Webasto. The unit will heat up to a 30-foot sailboat. The **AT2000STC** utilizes a 60mm hot air duct system, a 22mm exhaust system, and a 3/16" fuel system.

Heat Output:	7,000 btu
Fuel Consumption:	.06 gal/hr (0.23 l/hr)
Voltage:	12 or 24 volt DC available
Power Consumption (12v):	
Full:	2.2 amps
Start-up (first 30 secs):	6.5 amps
Dimensions:	L 12.25" x W 4.72" x H 4.76" (311mm x 120mm x 121mm)
Weight:	5.73 lbs (2.6kg)



AT40

The Air Top 40 can heat mid-sized boats up to 34 feet in length. It utilizes an 90mm or 60mm hot air duct system, a 24mm exhaust system, and a 3/16" fuel line system.

Heat Output:	13,300 btu
Fuel Consumption:	.12 gal/hr (0.45 l/hr)
Voltage:	12 or 24 volt DC available
Power Consumption (12v):	
Full:	3.4 amps
Start-up (first 30 secs):	10 amps
Dimensions:	L 16.65" x W 5.83" x H 6.38" (423mm x 148mm x 162mm)
Weight:	5.9 lbs (2.68kg)



AT55


The Air Top 55 can heat up to a 38-foot sailboat or a 34-foot powerboat. It utilizes a 90mm & 60mm duct system, a 24mm exhaust system and a 3/16" fuel line system.



Heat Output:	18,750 btu
Fuel Consumption:	.17 gal/hr (0.64 l/hr)
Voltage:	12 or 24 volt DC available
Power Consumption (12v):	
Full:	7.4 amps
Start-up (first 30 secs):	10 amps
Dimensions:	L 16.65" x W 5.83" x H 6.38" (423mm x 148mm x 162mm)
Weight:	5.9 lbs (2.68kg)


Air heat is advantageous for both its simplicity and its ability to provide a quick heat up.

Other than the DIY (Do It Yourself) kits, every model heater offered by SMS is thermostatically controlled to maintain a warm, dry cabin while boating.

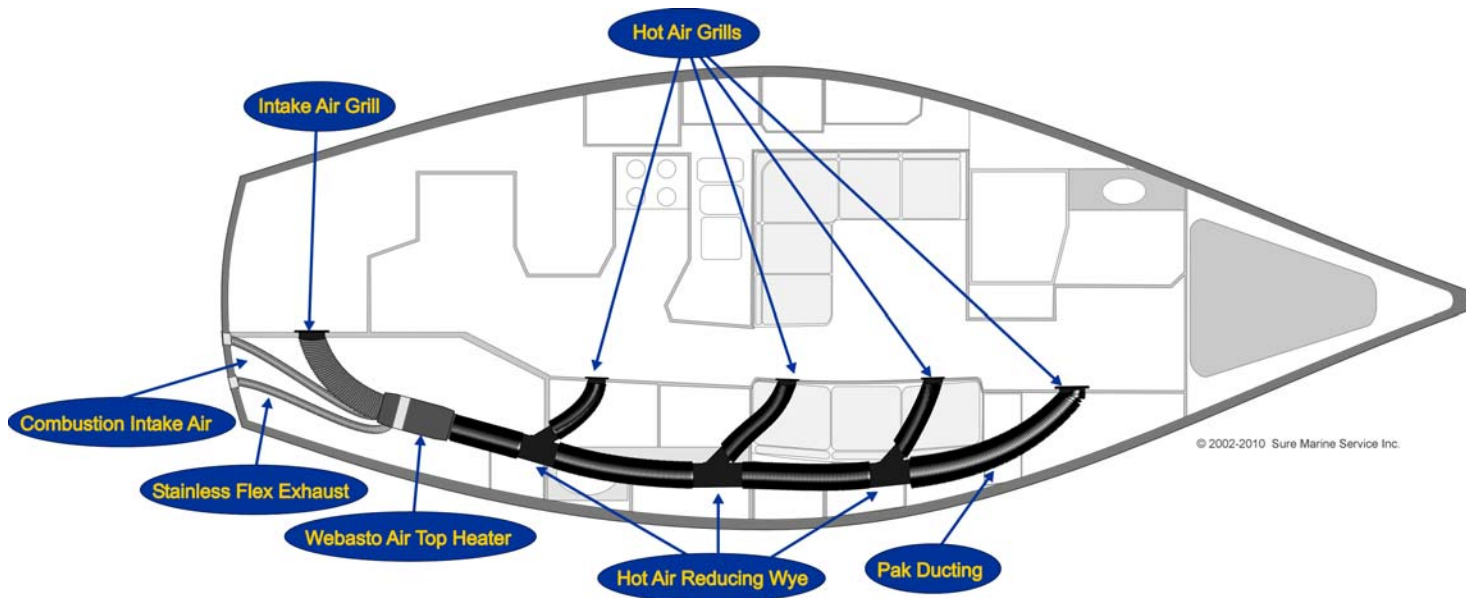

Example of Sailboat Installation of Webasto Air Top 55

Duct Equipment

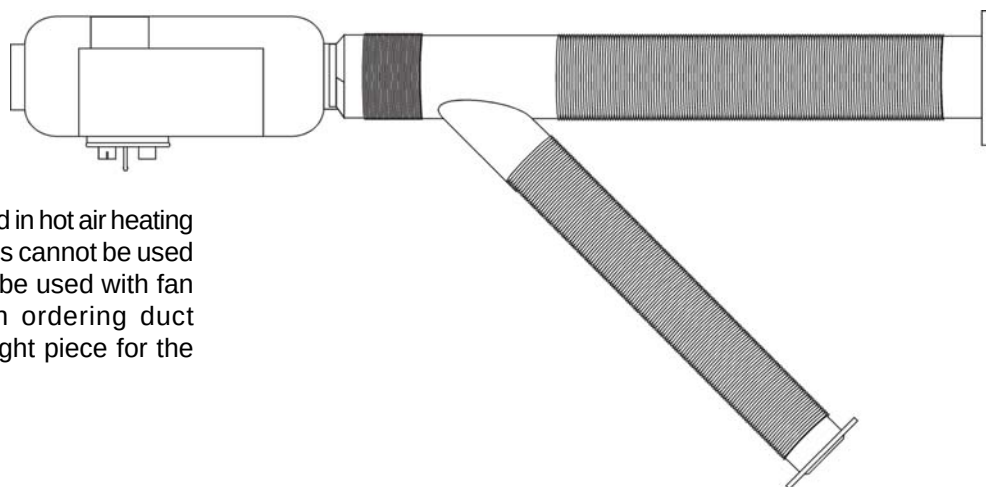

Only high-temperature duct can be used in hot air heating systems. Low-temperature duct pieces cannot be used in air heating systems, but they can be used with fan heaters for water systems. When ordering duct equipment, be sure to choose the right piece for the system.

	Description	Material	Part Number
	Low temperature flexible plastic wound duct. Cut to size up to 50'.	Low-Temp. Plastic	HTR-1 1" plastic-wound duct HTR1.25 1½" plastic-wound duct HTR2 2" wire-wound duct HTR2.5 2½" wire-wound duct HTR3 3" plastic-wound duct HTR4 4" plastic-wound duct
	High temperature duct. Available in 5' and 10' sticks.	PAK	001-057 2" PAK duct 002-445 2½" PAK duct 001-058 3" PAK duct 001-059 4" PAK duct 001-060 5" PAK duct 001-066 6" PAK duct W441-376 55mm PAK duct 398-497 60mm PAK duct W398-519 80mm PAK duct W903-95A 90mm PAK duct
	Fiberglass reinforced high temperature duct. Available in 5' and 10' sticks.	FAF	001-066 5" FAF duct 001-067 6" FAF duct
	High temperature duct insulation. Available in 6' sticks.		001-068 3/4" insulation 001-061 1" insulation 001-062 1½" insulation 001-063 2", 2½, 55mm & 60mm insulation 001-064 3", 80mm, & 90mm insulation 001-065 4" & 100mm insulation

Duct Equipment

	<i>Description</i>	<i>Material</i>	<i>Part Number</i>
	Plastic Branch Y. Available in 3 inch and 4 inch as well as 55mm, 60mm, and 80mm.	High Temp. Plastic	W90044 3" Branch Y W90045 4" Branch Y W495-697 55mm Branch Y 9009264B 60mm Branch Y W495-700 80mm Branch Y
	Reduced Branch Y. Available in 80 x 55 x 80mm and 90mm x 60mm x 90mm.	High Temp. Plastic	W495-719 80 x 55 x 80mm Branch Y W909-99A 90 x 60 x 90mm Branch Y
	True Y. Available in 80 or 55mm with or without directional flapper gate.	High Temp. Plastic	W429-627- 55mm True Y W101-374- 55mm True Y With Flap W100-548- 80mm True Y W100-567- 80mm True Y With Flap
	Reduced true Y. Available only in 80 x 55 x 55mm.	High Temp. Plastic	W495-689--80 x 55 x 55 True Y
	Metric duct adapter for Webasto air heating systems.	High Temp. Plastic	W495-654- 80mm x 55mm Adapter
	Heater Duct Elbow. For tight right angle turns.	High Temp. Plastic	W101-404-55mm Heater L Fitting W298-49A-60mm Heater L Fitting W116-909-80mm Heater L Fitting


Duct Equipment

<i>Part Number</i>	<i>Material</i>	<i>Description</i>	
3840BK–Black Open–Only 3840RBK–Black Closeable 3840WH–White Open–Only 3840RWH–White Closeable 3840DB–Beige Open–Only 3840RDB–Beige Closeable 3840BR–Brown Open–only 3840RBR–Brown Closeable 3840OW–Off–White Open–Only	High Temp. Plastic	High temperature 4" duct grille. This grille can be used in all hot air heating systems. Available in black, brown, beige, white and off-white in both closeable and open-only models.	
001-088P	High Temp. Plastic	High temperature 3" x 4" adapter can be used to adapt any 3840 series (above) grill to 3"	
WRD100–100mm Closeable Grille	High Temp. Plastic	High Temperature 100mm closeable duct grille. Available only in black.	
W107–976–80mm Open–Only Straight Grille. W107–984–80mm Open–Only 45 Degree Angle Grille	High Temp. Plastic	High Temperature 80mm open-only grille. Available with 45 degree directional flow or straight out. Available only in black.	
WRD–75– 75mm Black Closeable grille.	High Temp. Plastic	High temperature 75mm duct grille. Available only in black and closeable.	
WRD–55– 55mm Black Closeable grille.	High Temp. Plastic	High temperature 55mm duct grille. Available only in black and closeable.	
W398-551 60mm "Eyeball" Defrost Outlet W264–091 80mm "Eyeball" Defrost Outlet	High Temp. Plastic	High temperature "eyeball" grille. This grille is a raised ball-grille that directs air at a 45 degree angle. Available	


Duct Equipment

	<i>Description</i>	<i>Material</i>	<i>Part Number</i>
	Low temperature duct adapter	Low – Temp . Plastic	03-1827 2-1/2" OD x 3" OD Duct Adapter 03-1828 2" OD x 3" OD Duct Adapter 03-1893 2-1/2" ID x 3" OD Duct Adapter 03-1894 2" ID x 2-1/2" OD Duct Adapter 531125 80mm OD (3" Id) x 4" OD
	Low temperature 60mm intake grill.	Low – Temp . Plastic	W873-89A
	Low temperature closeable grille.	Low – Temp . Plastic	2288A2 2" Black Closeable Outlet 2317A 2½" Black Closeable Outlet 2317AW 3" White Closeable Outlet 06-2003 3" Black Closeable Outlet 06-2023-12 4" Black Closeable Outlet
	Low temperature closeable grille for bulkheads up to 1/4" thick (hose flange screws onto back of grille to secure it in place). Available only in back.	Low – Temp . Plastic	06-2022-9 Sonora 2" Black Outlet 06-2022-8 Sonora 2-1/2" Black Outlet
	Low temperature grille. Open only. Available only in back.	Low – Temp . Plastic	2313A2 2" Black Open-Only Outlet 06-2002 2½" Black Open-Only Outlet 06-2019-3-3 3" Black Open-Only Outlet
	Low temperature grille. 2-1/2" wide x 5-3/4" long with a 2-1/2" hose adapter. Available only in back.	Low – Temp . Plastic	06-2020-4 2-1/2" Defrost Grille
	Low temperature plastic defrost grille and boot (sold separately). Only available in 2-1/2 inch and black.	Low – Temp . Plastic	30-764 2-1/2" Cary Defrost Boot X-37 Slotted Defrost Grill
	Trans adapter. For wall connections or connections to fan heater units. Available only in black.	Low – Temp . Plastic	03-1834 2" Trans Adapter 03-1809 2-1/2" Trans Adapter 001-037 3" Trans Adapter 001-038 4" Trans Adapter

Duct Equipment

Part Number	Material	Description	
005-147 2" Duct Splice 005-148 2-1/2" Duct Splice 005-149 3" Duct Splice 005-151 4" Duct Splice 005-145 55mm Duct Splice 005-146 60mm Duct Splice 005-150 80mm Duct Splice 005-142 90mm Duct Splice	Stainless Steel	Duct Splice. Available in 3, 4, 5 and 6 inch sizes.	
001-073 3" Elbow 001-074 4" Elbow 001-075 5" Elbow 001-076 6" Elbow	Galvanized Steel	Adjustable duct elbow. Available in 3, 4, 5 and 6 inch sizes.	
001-081 3" Branch Y 001-082 4" Branch Y	Galvanized Steel	Standard duct branch Y's. Available in 3 and 4 inch sizes.	
W005-234 5 x 4 x 4 Branch Y 005-234 4 x 3 x 3 Branch Y	Galvanized Steel	Reduced branch Y. Available in 5" x 4" x 4" and 4" x 3" x 3"	
P-1721 Angled duct Defrost Boot	Galvanized Steel	Angled duct Boot. Outlet fits 2 x 10 inch grilles.	
P-521 Straight Duct Defrost Boot	Galvanized Steel	Straight duct boot. Outlet fits 2 x 10 inch grilles.	
001-878 2 x 3" Adapter	Spun Alum.	2" duct x 3" grill or wye adapter.	
W001-088 3 x 4" Adapter W001-089 4 x 5" Adapter W001-401 5 x 6" Adapter	Galvanized Steel	Duct Reducer. Available in 3 x 4, 4 x 5, 5 x 6, and 4 x 6 sizes.	
002-923 2 1/4"x10 steel grille 002-513 2 1/4"x14 steel grille 002-911 2 1/4"x10 closeable grille	Painted Steel	Flat steel grille. Available in 2 1/4" x 10" closeable and non-closeable.	


HADS-Hot Air Ducting System

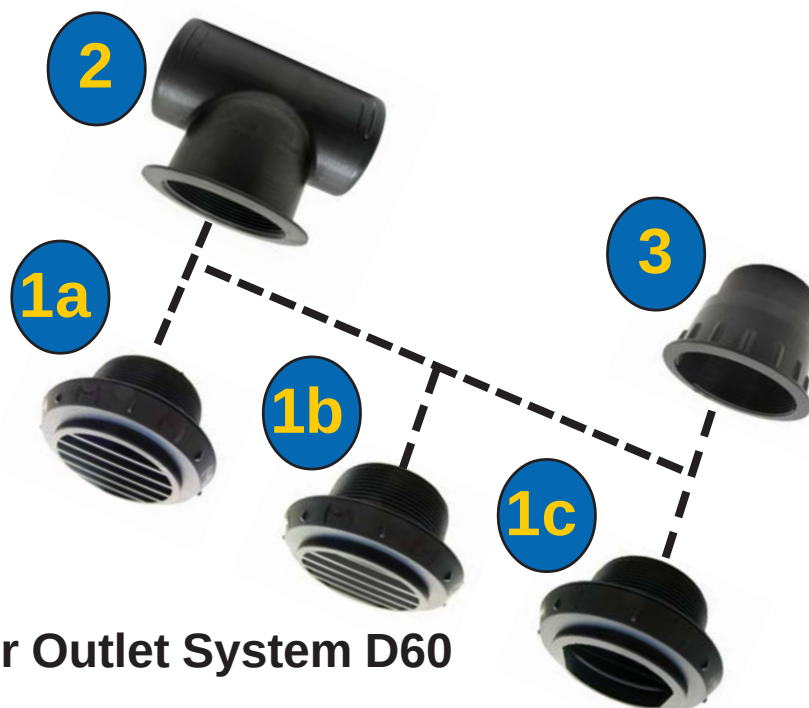

Air Outlet System D60


	Pos.	Part #	Description
	1a	9012297A	Air outlet D60, 90 Degree, Black
		9012298A	Air outlet D60, 90 Degree, White
		9012299A	Air outlet D60, 90 Degree, Grey
	1b	9012294A	Air outlet D60, 45 Degree, Black
		9012295A	Air outlet D60, 45 Degree, White
		9012296A	Air outlet D60, 45 Degree, Grey
	1c	9012300A	Air outlet D60, Closeable, Black
		9012301A	Air outlet D60, Closeable, White
		9012302A	Air outlet D60, Closeable, Grey
	2	9009267B	T-part 90/60/90 for the outlet with internal screw thread, Black
		9009268B	T-part 60/60/60 for the outlet with internal screw thread, Black
	3	9009239B	Duct Adapter for D60 outlets with internal screw thread, Black

Thru-Bulkhead System D60

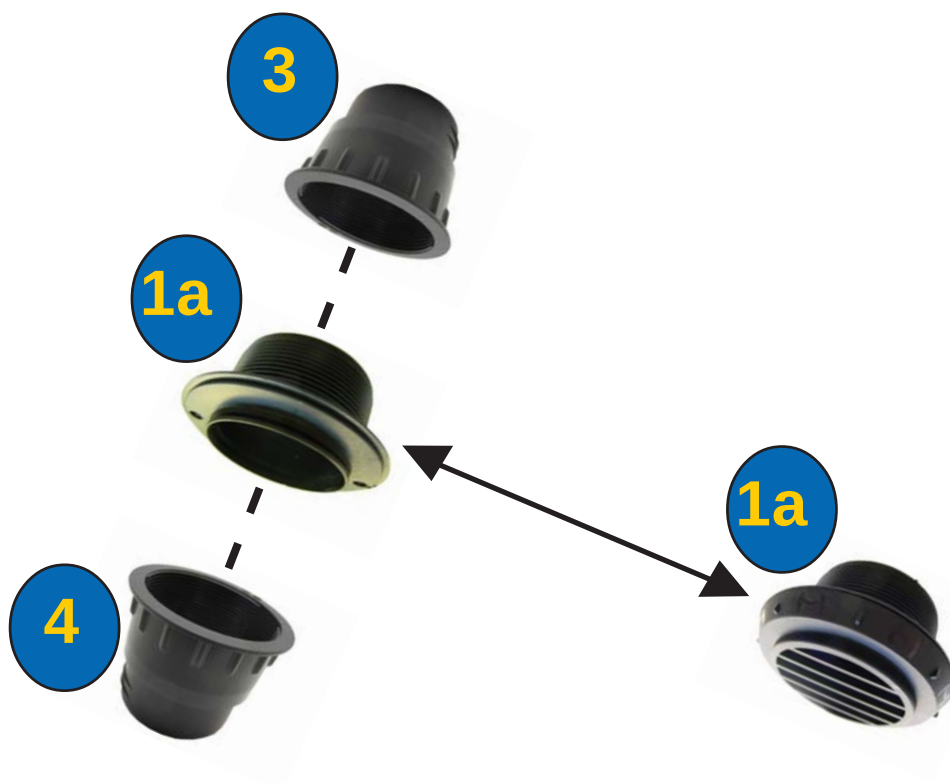


	Pos.	Part #	Description
	1a	9012297A	Air outlet D60, 90 Degree, Black
		9012298A	Air outlet D60, 90 Degree, White
		9012299A	Air outlet D60, 90 Degree, Grey
	3	9009239A	Duct Adapter for D60 outlets with internal screw thread, Black
	4	9009249C	Duct Adapter for D60 outlets, Snap on, Black

Air Outlet System D90

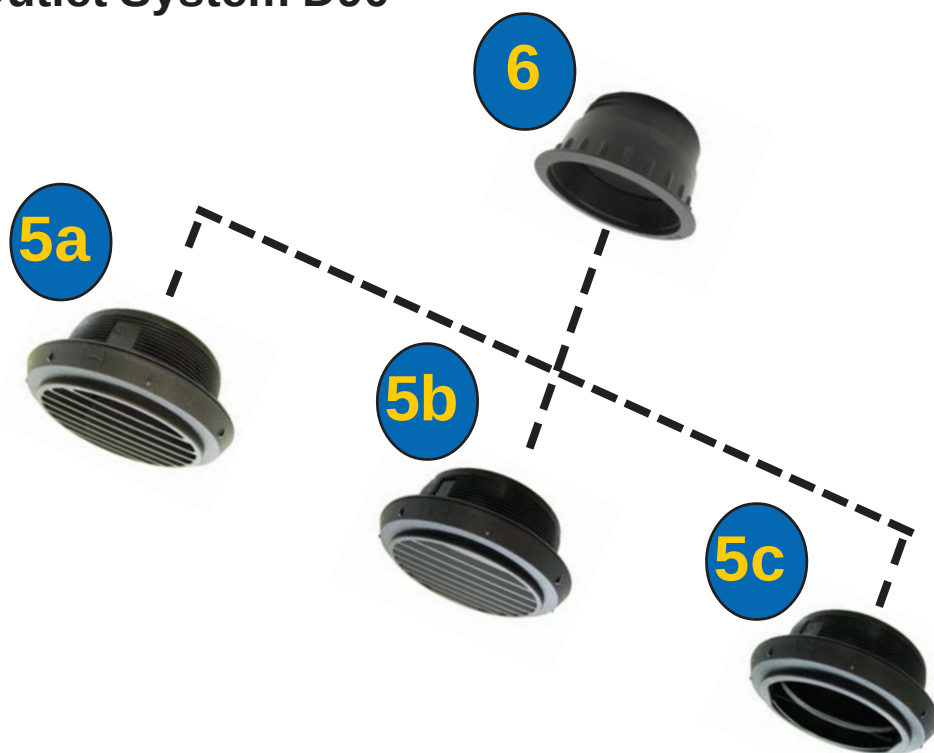

	Pos.	Part #	Description
	5a	9012288A	Air outlet D90, 90 Degree, Black
		9012289A	Air outlet D90, 90 Degree, White
		9012290A	Air outlet D90, 90 Degree, Grey
	5b	9012285A	Air outlet D90, 45 Degree, Black
		9012286A	Air outlet D90, 45 Degree, White
		9012287A	Air outlet D90, 45 Degree, Grey
	5c	9012291A	Air outlet D90, Closeable, Black
		9012292A	Air outlet D90, Closeable, White
		9012293A	Air outlet D90, Closeable, Grey
	6	9009240B	Duct Adapter for D90 outlets with internal screw thread, Black

Thru-Bulkhead System D90

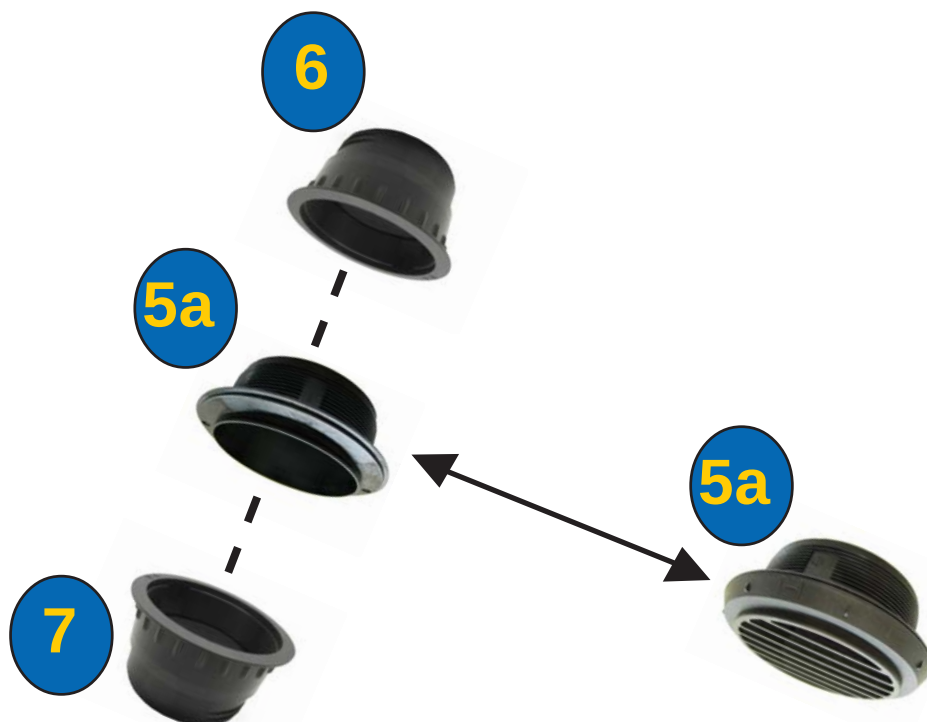

	Pos.	Part #	Description
	5a	9012288A	Air outlet D90, 90 Degree, Black
		9012289A	Air outlet D90, 90 Degree, White
		9012290A	Air outlet D90, 90 Degree, Grey
	3	9009240B	Duct Adapter for D90 outlets with internal screw thread, Black
	4	9009250C	Duct Adapter for D90 outlets, Snap on, Black

HADS Connection Parts

	Part #	Description
	9009260C	Elbow 90mm x 90mm, Black
	9011011C	Adapter 90mm x 60mm (screws onto 90mm)
	9009261C	Wye 90mm, Black
	9009263B	Wye 90mm x 60mm x 90mm, Black
	9009264B	Wye 60mm x 60mm x 60mm, Black
	9009265B	Tee 90mm x 90mm x 90mm, Black
	9009266B	Tee 60mm x 60mm x 60mm, Black

HADS Grill Colors



Black



Grey




White

Water Heater / Boat Size

Heater	Sailboat	Powerboat
TSL 17	34' - 38'	30' - 34'
Thermo Pro 90	38' - 42'	34' - 40'
TTP150	42' - 48'	40' - 47'
DBW-230	49' - 62'	48' - 65'

** Designates heaters for live aboard applications when properly installed.*

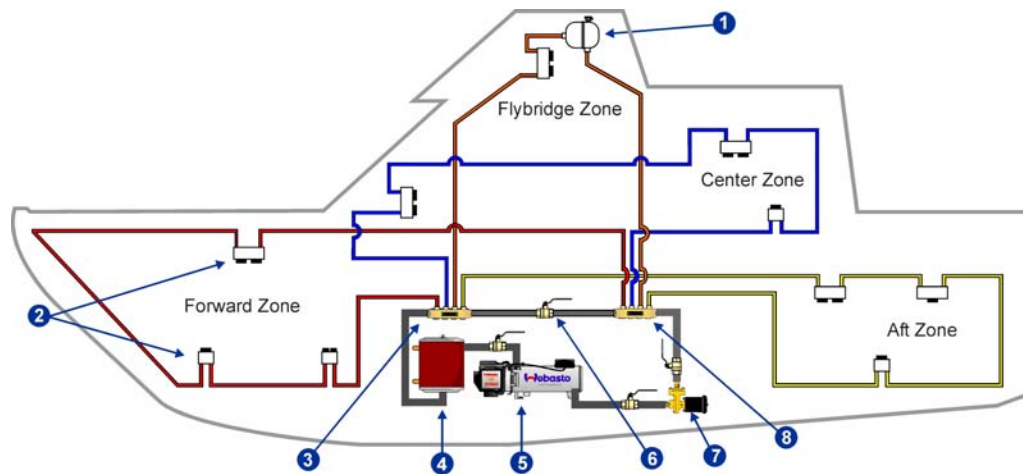

- 1 - **Expansion Tank**
(See chapter: Water system)
- 2 - **Fan Heater**
(See chapter: Fan Heaters)
- 3 - **Distribution Manifold**
(See chapter: Water system)
- 4 - **Domestic Water Heater**
(See chapter: Domestic Water System)
- 5 - **Webasto DBW type Boiler**
(This chapter)
- 6 - **Service Valve**
(See chapter: Water system)
- 7 - **Circulation Pump**
(See chapter: Water System)
- 8 - **Return Manifold**
(See chapter: Water system)

Water heat is a versatile method to heat your boat. Similar to a household boiler system, a loop is run throughout your boat to provide heat to fan units which in turn blow hot air into your cabin. Not only can a water system heat your boat, it can be used to heat your domestic hot water as well.

With a heat exchanger you can capture waste heat from your running engine and use that to heat the system without running the boiler itself.


Those that travel in severe cold weather areas may modify a basic system to also provide engine block heat.

Contact an SMS salesperson for details on what can be done with a water heater.

TSL-17

The TSL-17 is the smallest water heater offered by Webasto and will heat up to a 38-foot sailboat or a 24-foot powerboat. It is designed to use a 3/4" hot water hose system, a 22mm flex exhaust system, and a 3/16" fuel line system. The TSL-17 is available in 12 or 24 volt versions.

Heat Output:	17,000 btu
Fuel Consumption:	.18 gal/hr (0.68 l/hr)
Voltage:	12 or 24 volt DC available
Power Consumption (12v):	
Full:	3.8 amps
Start-up (first 30 secs):	8.8 amps
Coolant Operating Temperature:	
Opens at:	169.7° F (76.5° C)
Closes at:	159.8° F (71° C)
Dimensions:	L 8.43" x W 4.17" x H 6.61" (214mm x 106mm x 168mm)
Weight:	6.39 lbs (2.9 kg)

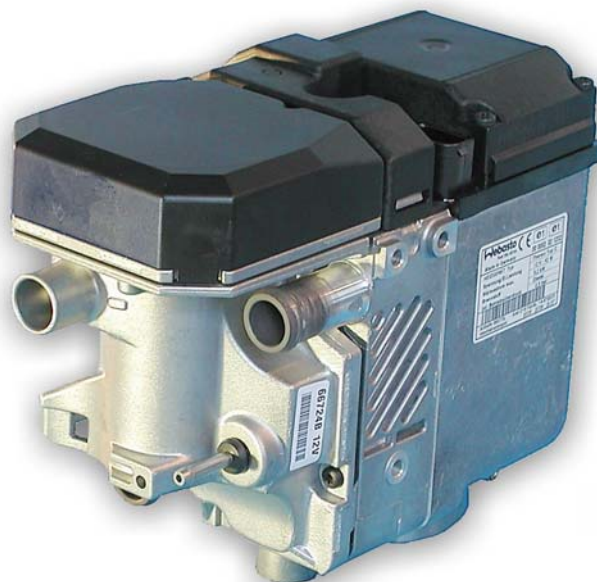

Thermo Pro 90

The Thermo Pro 90 is a 30,000 btu water heater which can be used to heat up to a 42-foot sailboat or a 40-foot powerboat. It utilizes a 3/4" water system, a 1 1/2" rigid exhaust system and a 3/16" fuel system. The Thermo Pro 90 is available in 12 or 24 volt versions.

Heat Output:	31,000 btu
Fuel Consumption:	.24 gal/hr (0.91 l/hr)
Voltage:	12 or 24 volt DC available
Power Consumption (12v):	
Full:	7 amps
Start-up (first 60 secs):	11.5 amps
Coolant Operating Temperature:	
Opens at:	168° F (75.6° C)
Closes at:	150° F (65.6° C)
Dimensions:	L 15" x W 5.16" x H 9.13" (381mm x 131mm x 232mm)
Weight:	10.8 lbs (4.9 kg)



TTP150

Heat Output:	50,000 btu
Fuel Consumption:	.52 gal/hr (1.45 kg/hr)
Voltage:	12 or 24 volt DC available
Power Consumption (12v): Full:	8.33 amps
Coolant Operating Temperature: Opens at: Closes at:	158° F (70° C) ± 6° F 140° F (60° C) ± 9° F
Dimensions:	L 18.5" x W 7.9" x H 7.9" (470mm x 200mm x 200mm)
Weight:	24.25 lbs (11 kg)




The **Thermo Top Pro 150** hydronic heater offered by Webasto will heat up to a 48 foot sailboat or a 47 foot powerboat. The **TTP150** utilizes 3/4" water hose to deliver heated coolant to fan heaters throughout the boat via a 110 volt pump. The **TTP150** uses a 1-1/2" rigid exhaust system, and a 1/4" supply and return fuel system. The **TTP150** is available in 12 or 24 volts.

DBW-230

Heat Output:	80,000 btu
Fuel Consumption:	.8 gal/hr
Voltage:	12 volt DC
Power Consumption (12v): Full:	10 amps
Coolant Operating Temperature: Opens at: Closes at:	167° F (75° C) ± 6° F 154° F (68° C) ± 9° F
Dimensions:	L 26.7" x W 9.5" x H 11" (680mm x 240mm x 279mm)
Weight:	48.5 lbs (22 kg)





The DBW 230 80,000 btu hydronic heater offered by Webasto will heat up to a 58 foot sailboat or a 56 foot powerboat. The system utilizes 1-1/2" water hose to deliver heated coolant to 3/4" zones of fan heaters throughout the boat. The DBW230 uses a 2-3/4" rigid exhaust system, and a 1/4" supply and return fuel system. The DBW 230 is available in 12 volts.

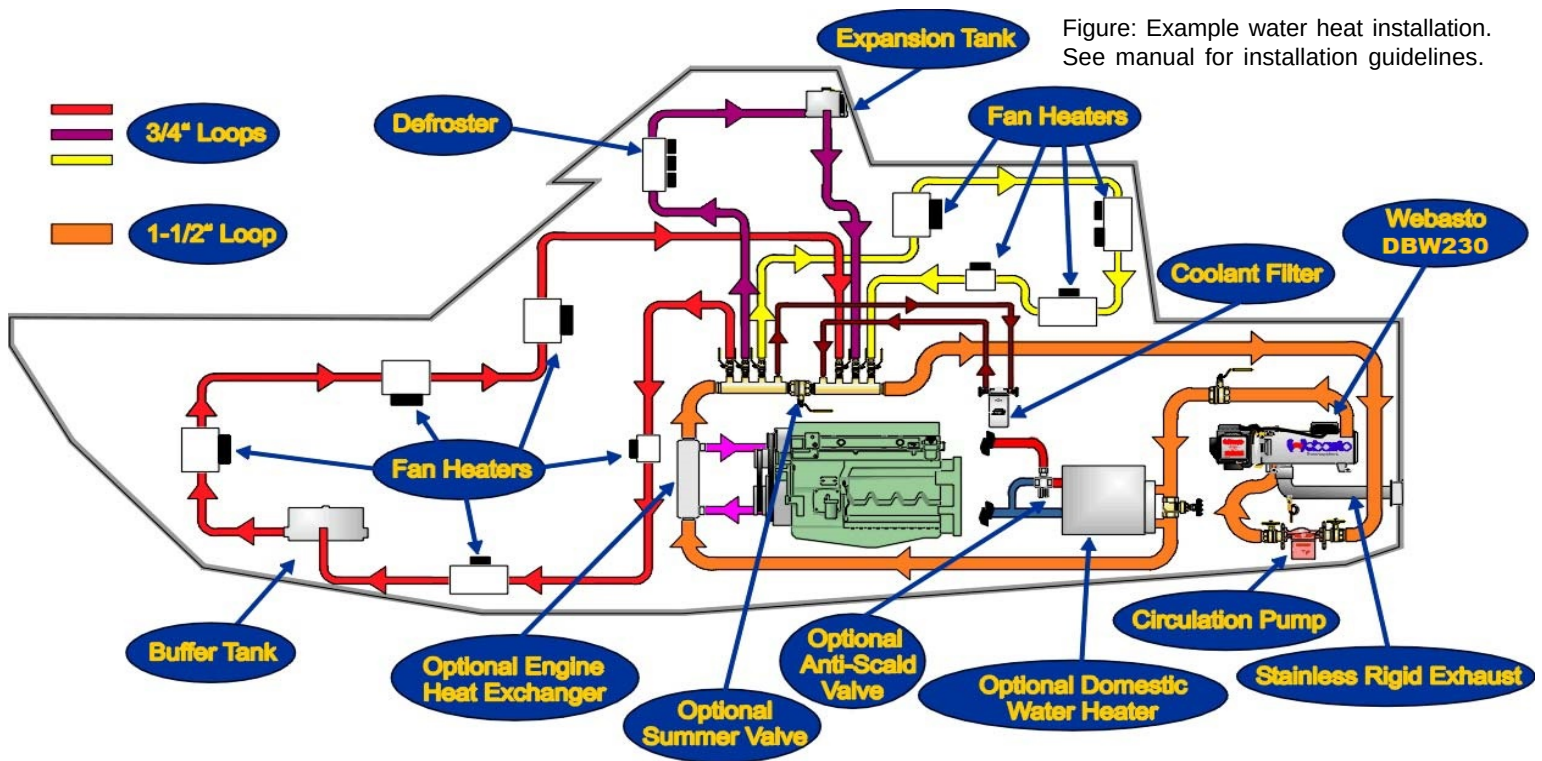


The goal of the technicians at Sure Marine Service is to design the **REAL™** with enough flexibility to fit the needs of any installation. Drawing on decades of installation and service experience, the **REAL™** has been refined to provide simplified installation and reliable performance.

Unlike any other hydronic defrosters and heaters, the **REAL™** can be mounted with the inlet/outlet fittings on either side or the top. The mounting foot and core are reversible. The blower mounting plate and vent outlet plate are also interchangeable. This offers a wide array of mounting options.

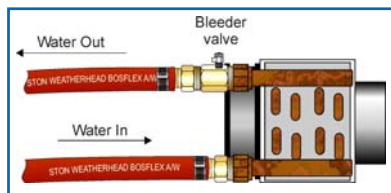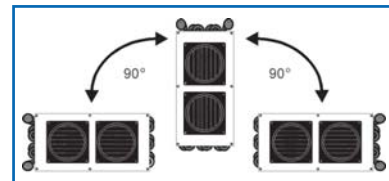

The unit has 3/4" female NPT fittings for the water (coolant) inlet and outlet and comes standard with 3/4" hose barb adapters. 5/8" hose barb adapters, Pex and Wirsbo adapters are available upon request. An air bleeder valve is included that will allow for venting any trapped air at the outlet side of the unit.

The heater core is made of 3/8" OD copper tubes with .014" wall and nine to eleven .006" thick aluminum fins per inch. The inlet and outlet manifolds are 1" tubing with a staggered pattern (4 row, 4 circuit) for full flow.

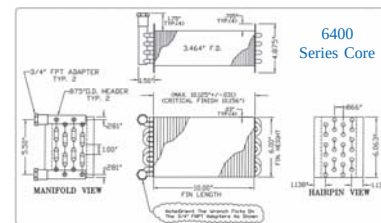

REAL Accessories

All **REAL™** hydronic defrosters and heaters come with the parts needed for a basic installation including ducting, grilles, clamps and water fittings. Several options exist to customize your installation. Switches, thermostats, water connections and different color outlets to match the interior of your boat are only some of the options available. Contact Sure Marine Service, Inc. for details.



Optional Fan Aquastat Kit
#W005-213-**REAL**
Prevents Fans From Operating
Until Temperature Exceeds 110
Degrees F.

002-740
Optional Bulkhead mount
bracket. Fits series **5000**,
5200, **5200-LP**, **5200-HO**, **6000**
and **6200**.



Many different grill options are
available to customize your
installation. Ask SMS for details.



Every **REAL™** is fitted with
3/4" FNPT to allow for
different sizes of hose
barbs or different types of
connections. If your engine
requires a 5/8" hose, the
REAL™ can be adapted to a
5/8" hose barb. If you are
using 3/4" PEX or Wirsbo
for your heating system,
the **REAL™** can be fitted with
those connections as well.



Contact a SMS salesperson for details.



Optional fresh air intake adapters
are available for all **5200-LP**
Series **REAL™** defrosters.



Optional **REAL™** fresh air
intake adapters fit Series
5400, **8000-LP** and **9000-LP**.



Optional fresh air intake
adapters are available for all
6000, **6200**, **6300**, **6400**,
8000-LP and **8000 Series**
REAL™ fan heaters.

Sure Marine can provide marine
grade wire and electrical
connections.



Optional High/Low switches
These switches must be
sized correctly to the fan
amperage.



Available with or without "off" position.

Aube TH135-01
Optional Thermostatic Control
(3 amp max)



REAL™
Fan Heaters by Sure Marine



5000 Series Hydronic Defrosters

The **5000 Series REAL™** defrosters have an output of up to **10,000 BTU's** and are the smallest Hydronic Defroster on the market. A **5000 Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A 3-speed blower is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 3 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
5000	5000B ¹	Black Grill Flush Mount Defroster	1	5-3/8"	6-3/8"	8-1/16" *	9 lbs
	5000BR ¹	Brass Grill Flush Mount Defroster	1	5-3/8"	6-3/8"	8-1/16" *	9 lbs
	5000SS ¹	S/S Grill Flush Mount Defroster	1	5-3/8"	6-3/8"	8-1/16" *	9 lbs
	5000W ¹	White Grill Flush Mount Defroster	1	5-3/8"	6-3/8"	8-1/16" *	9 lbs
	5013	Single 3" Ducted Defroster	1	5-7/8"	7-3/8"	9-9/16" *	10 lbs
	5022	Single 4" Ducted Defroster	1	5-7/8"	7-3/8"	9-3/16" *	11 lbs
	5032	Dual 3" Ducted Defroster	1	5-7/8"	7-3/8"	11-5/16" *	10 lbs


¹Grill Measures 4-3/4" x 8-1/2"

* Bleeder fitting adds 3/8" to depth



Heating Capacity (BTU/Hr.)

REAL™ 5000 Series Hydronic Defrosters

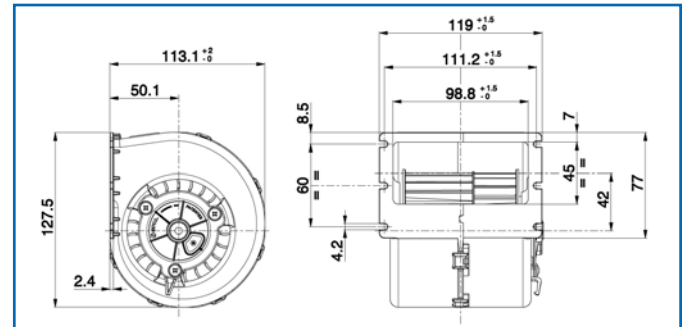

PERFORMANCE CHART

Static pressure mm H ₂ O	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure in H ₂ O
0	260	5.3	153	0
5	240	4.8	142	0.2
10	220	4.5	130	0.4
15	200	4.3	118	0.6
20	180	4.2	106	0.8
25	160	4.0	94	1.0
30	130	3.6	77	1.2
35	100	3.4	59	1.4
40	60	3.1	35	1.6
45	40	2.8	24	1.8
50	0	2.7	0	2.0

Test voltage 13 V d.c.

5200-LP Series Low Profile Hydronic Defrosters

The **5200-LP Series REAL™** low profile defrosters have an output of up to **15,000 BTU's**. A **5200-LP Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A 3-speed blower is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 4 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
5200-LP	5200B-LP ¹	Black Grill Flush Mount Defroster	1	6-3/8" *	8-7/8"	9-9/16"	9 lbs
	5200BR-LP ¹	Brass Grill Flush Mount Defroster	1	6-3/8" *	8-7/8"	9-9/16"	9 lbs
	5200SS-LP ¹	S/S Grill Flush Mount Defroster	1	6-3/8" *	8-7/8"	9-9/16"	9 lbs
	5200W-LP ¹	White Grill Flush Mount Defroster	1	6-3/8" *	8-7/8"	9-9/16"	9 lbs
	5213-LP	Single 3" Ducted Defroster	1	6-11/16" *	9-15/16"	11-1/16"	10 lbs
	5214-LP	Single 4" Ducted Defroster	1	6-11/16" *	9-15/16"	11-11/16"	11 lbs
	5223-LP	Dual 3" Ducted Defroster	1	6-11/16" *	9-15/16"	10-1/2"	10 lbs
	5242-LP	Quadruple 2" Ducted Defroster	1	6-11/16" *	9-15/16"	10-1/2"	10 lbs



¹Grill Measures 8-1/4" x 10-13/16"

* Bleeder fitting adds 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ 5200 Series-LP Low Profile Hydronic Defrosters

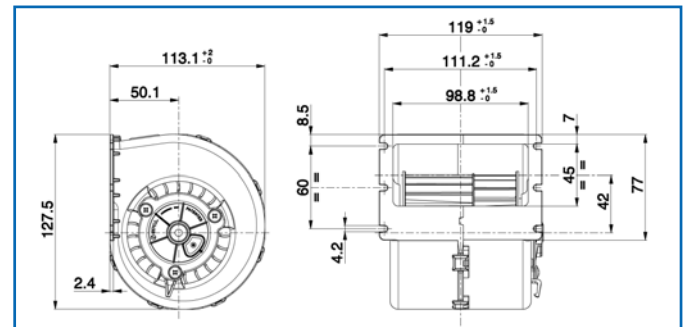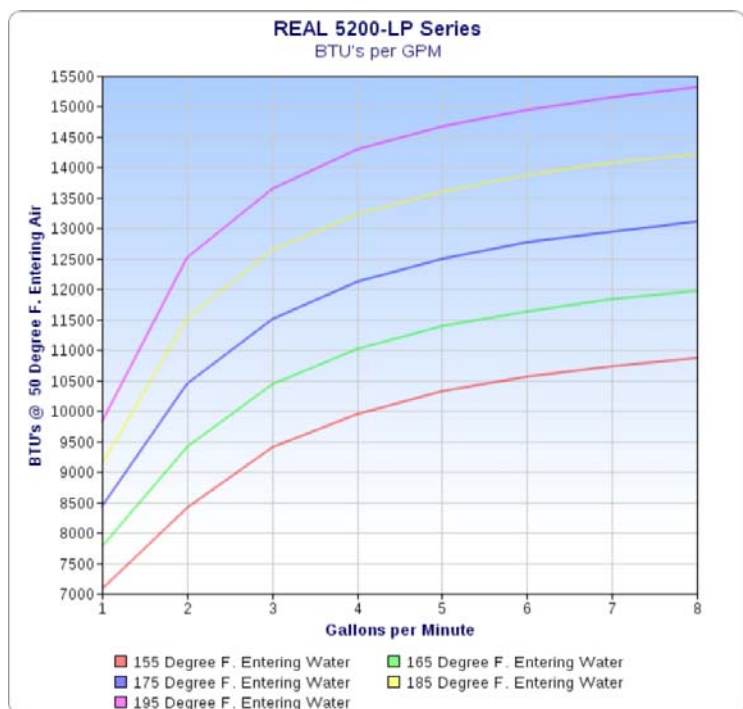

PERFORMANCE CHART

Static pressure mm H ₂ O	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure in H ₂ O
0	260	5,3	153	0
5	240	4,8	142	0,2
10	220	4,5	130	0,4
15	200	4,3	118	0,6
20	180	4,2	106	0,8
25	160	4,0	94	1,0
30	130	3,6	77	1,2
35	100	3,4	59	1,4
40	60	3,1	35	1,6
45	40	2,8	24	1,8
50	0	2,7	0	2,0

Test voltage 13 V d.c.

5200 Series Hydronic Defrosters

The **5200 Series REALTM** defrosters have an output of up to **20,000 BTU's**. A **5200 Series REALTM** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A 3-speed blower is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 4 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions


Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
5200	5200B ¹	Black Grill Flush Mount Defroster	1	9-3/8"	8-7/8"	9-5/8"	10 lbs
	5200BR ¹	Brass Grill Flush Mount Defroster	1	9-3/8"	8-7/8"	9-5/8"	10 lbs
	5200SS ¹	S/S Grill Flush Mount Defroster	1	9-3/8"	8-7/8"	9-5/8"	10 lbs
	5200W ¹	White Grill Flush Mount Defroster	1	9-3/8"	8-7/8"	9-5/8"	10 lbs
	5213	Single 3" Ducted Defroster	1	9-3/8"	9-15/16"	11-1/8"	11 lbs
	5214	Single 4" Ducted Defroster	1	9-3/8"	9-15/16"	11-3/4"	12 lbs
	5223	Dual 3" Ducted Defroster	1	9-3/8"	9-15/16"	10-9/16"	12 lbs
	5242	Quadruple 2" Ducted Defroster	1	9-3/8"	9-15/16"	10-9/16"	12 lbs

¹Grill Measures 8-1/4" x 10-13/16"



Heating Capacity (BTU/Hr.)

REALTM 5200 Series Hydronic Defrosters

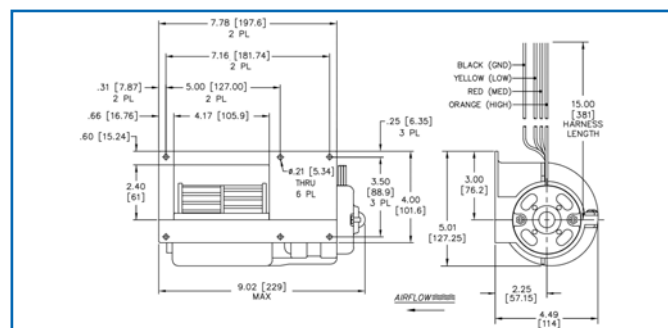

TYPICAL AIR PERFORMANCE @ 13.5VDC SCROLL BLOWER HI SPEED

STATIC PRESSURE IN H ₂ O	STATIC PRESSURE mm H ₂ O	CFM	m ³ /h	Amps
0	0.0	224	381	10.8
0.1	2.5	220	374	10.7
0.2	5	216	367	10.7
0.3	7.5	215	365	10.6
0.4	10	211	358	10.4
0.5	12.5	207	352	10.3
0.6	15	202	343	10.1
0.7	17.5	200	340	10.2
0.8	20	193	328	9.9
0.9	22.5	193	328	9.9
1.0	25	188	319	9.8
1.2	30	173	294	9.4
1.4	35	159	270	9.0
1.6	40	148	251	8.7
1.8	45	131	223	8.2

5200-HO Series High Output Hydronic Defrosters

The **5200-HO Series REAL™** high output defrosters have an output of up to **29,000 BTU's**. A **5200-HO Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A high output 3-speed blower is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 4 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions


Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
5200-HO	5200B-HO ¹	Black Grill Flush Mount Defroster	1	8-7/16"	8-7/8"	12"	11 lbs
	5200BR-HO ¹	Brass Grill Flush Mount Defroster	1	8-7/16"	8-7/8"	12"	11 lbs
	5200SS-HO ¹	S/S Grill Flush Mount Defroster	1	8-7/16"	8-7/8"	12"	11 lbs
	5200W-HO ¹	White Grill Flush Mount Defroster	1	8-7/16"	8-7/8"	12"	11 lbs
	5213-HO	Single 3" Ducted Defroster	1	8-1/2"	9-15-16"	13-1/2"	12 lbs
	5214-HO	Single 4" Ducted Defroster	1	8-1/2"	9-15-16"	14-1/8"	13 lbs
	5223-HO	Dual 3" Ducted Defroster	1	8-1/2"	9-15-16"	12-15-16"	12 lbs
	5242-HO	Quadruple 2" Ducted Defroster	1	8-1/2"	9-15-16"	12-15-16"	12 lbs

¹Grill Measures 8-1/4" x 10-13/16"



Heating Capacity (BTU/Hr.)

REAL™ 5200 Series-HO High Output Hydronic Defrosters

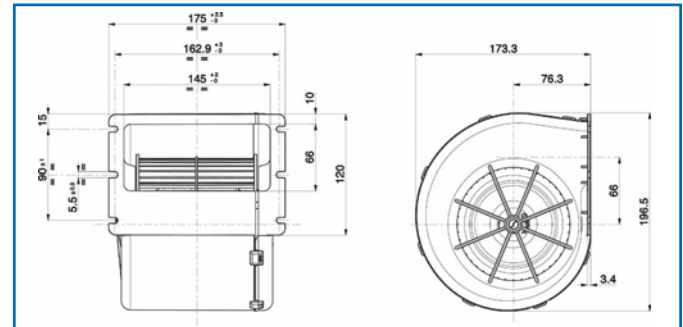

PERFORMANCE CHART

Static pressure mm H ₂ O	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure in H ₂ O
0	770	17,5	454	0
10	700	16,5	413	0,4
20	630	15,5	372	0,8
25	580	14,8	342	1,0
30	530	14,0	313	1,2
35	460	13,0	271	1,4
40	340	11,0	201	1,6
50	130	8,0	77	2,0
55	0	7,0	0	2,2

Test voltage 13 V d.c.

5400 Series Hydronic Defrosters

The **5400 Series REAL™** defrosters have an output of up to **26,000 BTU's**. A **5400 Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A 3-speed blower is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 6 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
5400	5400B ¹	Flush Mount Defroster	1	6-11/16" *	12-1/2"	9-5/8"	13 lbs
	5400BR ¹	Brass Grill Flush Mount Defroster	1	6-11/16" *	12-1/2"	9-5/8"	13 lbs
	5400SS ¹	Stainless Grill Flush Mount Defroster	1	6-11/16" *	12-1/2"	9-5/8"	13 lbs
	5400W ¹	White Grill Flush Mount Defroster	1	6-11/16" *	12-1/2"	9-5/8"	13 lbs
	5414	Single 4" Ducted Defroster	1	6-3/4" *	13-3/8"	11-3/4"	13 lbs
	5423	Dual 3" Ducted Defroster	1	6-3/4" *	13-3/8"	10-9/16"	13 lbs
	5424	Dual 4" Ducted Defroster	1	6-3/4" *	13-3/8"	11-3/4"	14 lbs
	5433	Triple 3" Ducted Defroster	1	6-3/4" *	13-3/8"	10-9/16"	14 lbs
	5442.5	Quadruple 2-1/2" Ducted Defroster	1	6-3/4" *	13-3/8"	10-1/2"	15 lbs
	5462	Six 2" Ducted Defroster	1	6-3/4" *	13-3/8"	10-9/16"	17 lbs


¹Grill Measures 8-1/4" x 14-1/4"

* Bleeder fitting adds 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ 5400 Series Hydronic Defrosters

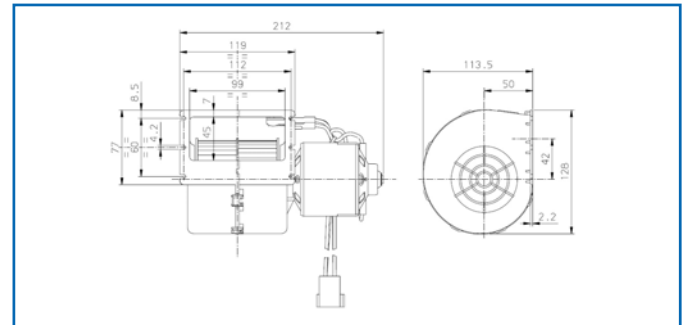

PERFORMANCE CHART SCHEMA PRESTAZIONI

Static pressure Pressione statica mm H ₂ O	Airflow Portata m ³ /h	Current input Corrente assorbita A	Airflow Portata CFM	Static pressure Pressione statica in H ₂ O
0	437	11.8	257	0
5	377	11.5	222	0.2
10	332	10.8	195	0.4
15	276	10.6	162	0.6
20	225	10.2	132	0.8
25	165	9.8	97	1.0
30	91	9.3	54	1.2
33.5	0	9.2	0	1.4

Test voltage 13 V d.c. - Tensione di prova 13 V c.c.

5400-HO Series High Output Hydronic Defrosters

The **5400-HO Series REAL™** high output defrosters have an output of up to **37,000 BTU's**. A **5400-HO Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A high output 3-speed blower is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 6 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions


Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
5400-HO	5400B-HO ¹	Flush Mount Defroster	1	8-7/16"	12-1/2"	12"	15 lbs
	5400BR-HO ¹	Brass Grill Flush Mount Defroster	1	8-7/16"	12-1/2"	12"	15 lbs
	5400SS-HO ¹	Stainless Grill Flush Mount Defroster	1	8-7/16"	12-1/2"	12"	15 lbs
	5400W-HO ¹	White Grill Flush Mount Defroster	1	8-7/16"	12-1/2"	12"	15 lbs
	5414-HO	Single 4" Ducted Defroster	1	8-1/2"	13-3/8"	14-1/8"	15 lbs
	5423-HO	Dual 3" Ducted Defroster	1	8-1/2"	13-3/8"	12-15/16"	15 lbs
	5424-HO	Dual 4" Ducted Defroster	1	8-1/2"	13-3/8"	14-1/8"	16 lbs
	5433-HO	Triple 3" Ducted Defroster	1	8-1/2"	13-3/8"	12-15/16"	16 lbs
	5442.5-HO	Quadruple 2-1/2" Ducted Defroster	1	8-1/2"	13-3/8"	12-7/8"	17 lbs
	5462-HO	Six 2" Ducted Defroster	1	8-1/2"	13-3/8"	12-15/16"	19 lbs

¹Grill Measures 8-1/4" x 14-1/4"



Heating Capacity (BTU/Hr.)

REAL™ 5400 Series-HO High Output Hydronic Defrosters

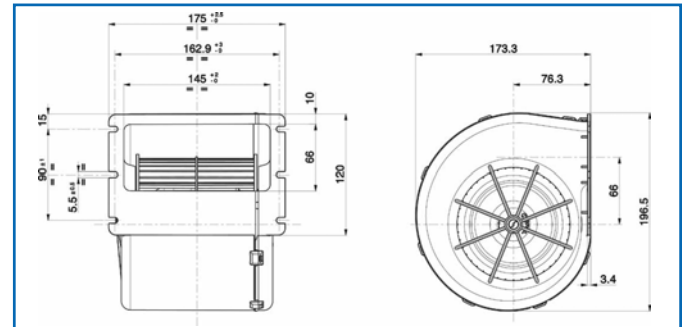

PERFORMANCE CHART

Static pressure mm H ₂ O	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure in H ₂ O
0	770	17,5	454	0
10	700	16,5	413	0,4
20	630	15,5	372	0,8
25	580	14,8	342	1,0
30	530	14,0	313	1,2
35	460	13,0	271	1,4
40	340	11,0	201	1,6
50	130	8,0	77	2,0
55	0	7,0	0	2,2

Test voltage 13 V d.c.

6000 Series Hydronic Heaters

The **6000 Series REAL™** heaters have an output of up to **5,300 BTU's**. Typically, these heaters are used to heat heads or quarter berths. A **6000 Series REAL™** heater consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A low amp draw axial fan is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 2 vents).

Available in 12 or 24 Volts. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
6000	6000B ¹	Black Grill Flush Mount Fan Heater	1	4-1/8"	6-3/8"	5-1/8"*	4 lbs
	6000BR ¹	Brass Grill Flush Mount Fan Heater	1	4-1/8"	6-3/8"	5-1/8"*	4 lbs
	6000SS ¹	Stainless Grill Flush Mount Fan Heater	1	4-1/8"	6-3/8"	5-1/8"*	4 lbs
	6000W ¹	White Grill Flush Mount Fan Heater	1	4-1/8"	6-3/8"	5-1/8"*	4 lbs
	6013	Single 3" Ducted Fan Heater	1	4-9/16"	7-3/8"	6-5/8"*	5 lbs
	6022	Dual 2" Ducted Fan Heater	1	4-9/16"	7-3/8"	6-3/8"*	5 lbs




¹Grill Measures 4-3/4" x 8-1/2"

* Bleeder fitting adds 3-1/2" to depth



Heating Capacity (BTU/Hr.)

REAL™ 6000 Series Hydronic Heaters

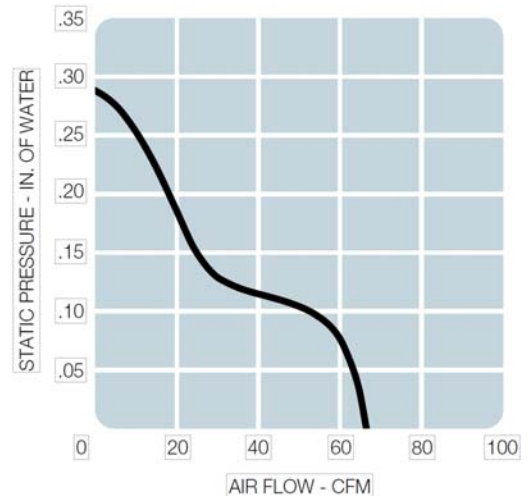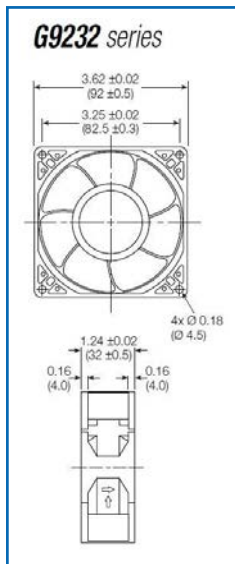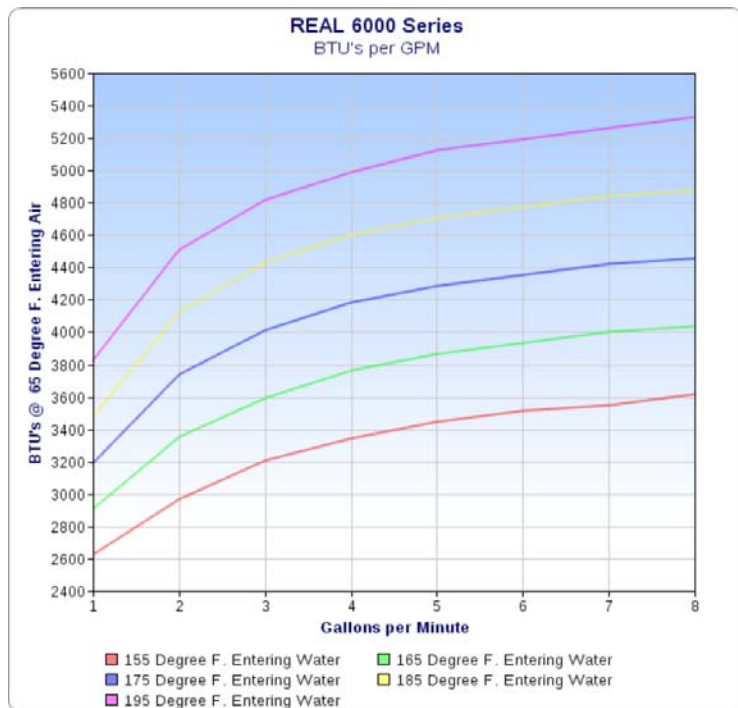

Model No.	Rated Voltage V	Current mA			Revolution RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dBA	Weight g
		5	12	24		M ³ /Min	CFM	MM	INCH		
G9232E	12/24	-	520	270	3,600	1.87	66	7.25	0.29	40	5.25

6200 Series Hydronic Heaters

The **6200 Series REAL™** heaters have an output of up to **10,250 BTU's**. Typically, these heaters are used to heat state rooms and medium sized cabins. A **6200 Series REAL™** heater consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A low amp draw axial fan is mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 4 vents).

Available in 12 or 24 Volts. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
6200	6200B ¹	Flush Mount Fan Heater	1	6-3/8"	8-7/8"	6-7/8" *	7 lbs
	6200BR ¹	Brass Grill Flush Mount Fan Heater	1	6-3/8"	8-7/8"	6-7/8" *	7 lbs
	6200SS ¹	Stainless Grill Flush Mount Fan Heater	1	6-3/8"	8-7/8"	6-7/8" *	7 lbs
	6200W ¹	White Grill Flush Mount Fan Heater	1	6-3/8"	8-7/8"	6-7/8" *	7 lbs
	6213	Single 3" Ducted Fan Heater	1	6-11/16"	9-15-16"	8-3/8" *	9 lbs
	6214	Single 4" Ducted Fan Heater	1	6-11/16"	9-15-16"	9" *	9 lbs
	6223	Dual 3" Ducted Fan Heater	1	6-11/16"	9-15-16"	8-3/8" *	9 lbs
	6242	Quadruple 2" Ducted Fan Heater	1	6-11/16"	9-15-16"	8-1/8" *	9 lbs




¹Grill Measures 8-1/4" x 10-13/16"

* Bleeder fitting adds 2-3/8" to depth & 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ 6200 Series Hydronic Heaters

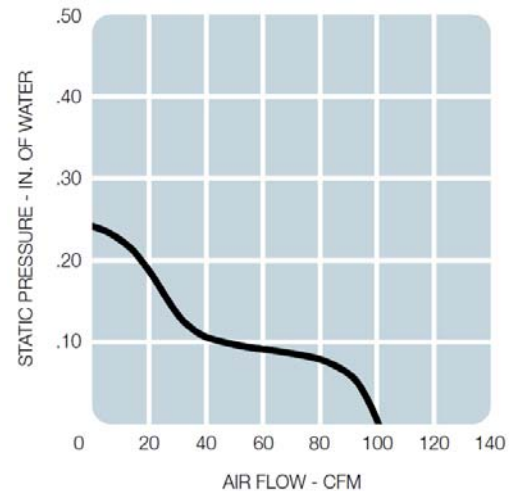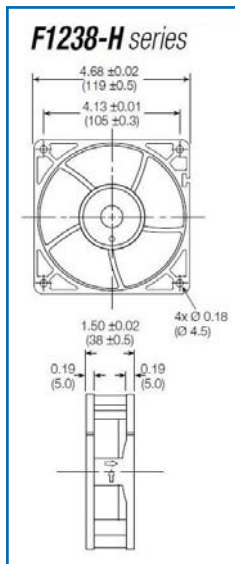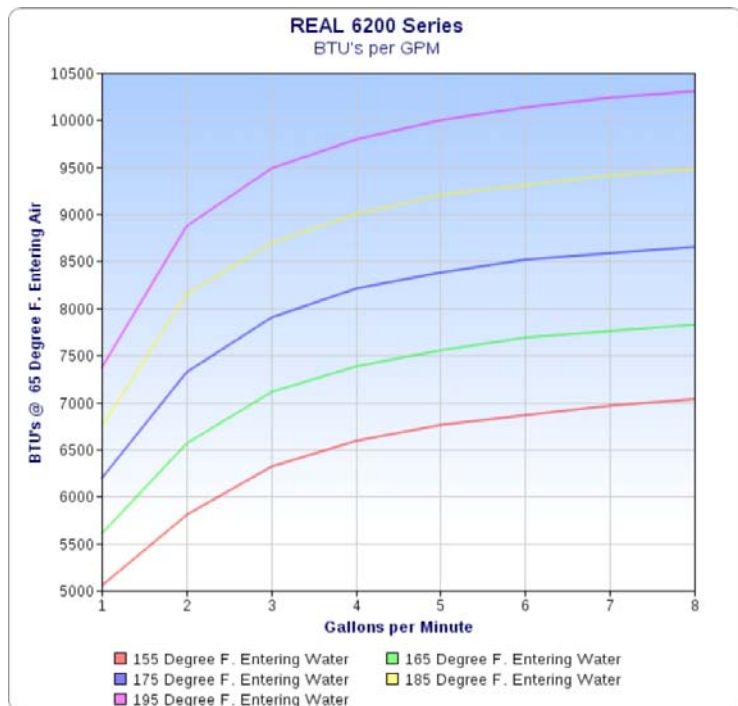

Model No.	Rated Voltage V	Current mA	Revolution RPM	Air Volume CFM	Maximum Static Pressure (in H ₂ O)	Sound Noise dBA	Weight oz
F1238M-H	12/24/48	- 360 180 120	2,700	103	0.24	38	9.45

6223-DF Dual Fan Hydronic Heaters

The model **6223-DF REAL™** heaters have an output of up to **9,400 BTU's (4,700 BTU's per outlet)**. Typically, these heaters are used to heat adjoining heads or small spaces. A model **6223-DF REAL™** heater consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. Two fans are mounted at the rear of the unit and dual 3" outlets are mounted at the front of the unit. An interior baffle separates each fan's output allowing for individual control of heat to two separate areas (with purchase of optional fan switches or thermostats). The 12 or 24 volt fans push air through the heating core and provides a comfortable flow of warmed air at the outlets. These 12 or 24 volt fans have a low amp draw and are very quiet in operation.

Available in 12 or 24 Volts. The heater is equipped with an air bleed screw that allows mounting with the coolant lines on the left, right, or top. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions




Series	Model	Description	Height	Width	Depth	Amps Total	Shipping Weight (lbs)
6200	6223-DF	Dual 3" Multiple Compartment Fan Heater	6-11/16" *	9-15/16"	8-3/8" *	0.48	9 lbs

* Bleeder fitting adds 2-3/8" to depth & 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ Model 6223-DF Dual Fan Hydronic Heaters

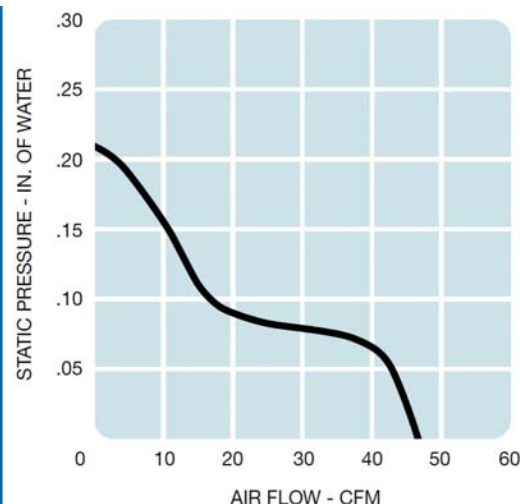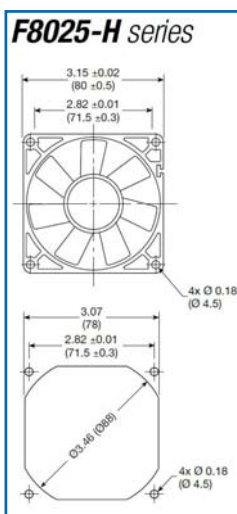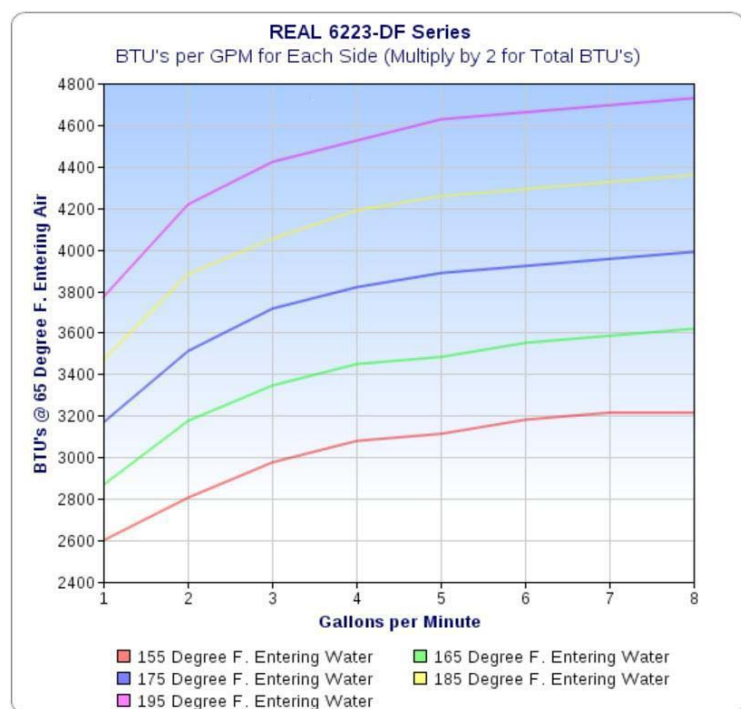

Model No.	Rated Voltage V	Current mA		Revolution RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight oz
		12	24		M ³ /Min.	CFM	MM	INCH		
F8025E-H	12/24	240	140	3,600	1.30	46	5.25	0.21	35	2.79

6300 Series Toe Space Hydronic Heaters

The **6300 Series REALTM** heaters have an output of up to **8,400 BTU's**. Typically, these heaters are used to heat galleys or areas where space is at a premium. A **6300 Series REALTM** heater consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. Two low amp draw axial fans are mounted at the rear of the unit.

Available in 12 or 24 Volts. The heater is equipped with an air bleed screw that allows mounting with the coolant lines on the left, right, or top. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Height	Width	Depth	Amps Total	Shipping Weight (lbs)
6300	6300B ¹	Black Grill Flush Mount Fan Heater	2-7/8" *	9-7/8"	9-7/8"	0.72	4 lbs


¹Grill Measures 3-1/8" x 12"

* Bleeder fitting adds 1/2" to height

The **REALTM** Model 6300 is designed to mount in the toe space below a cabinet or locker. This unit has a textured black face that is easy to "hide". The heater can be mounted flat to the floor or by reversing the grill inset into a bulkhead. The heater is equipped with an air bleed screw that allows mounting with the coolant lines on the left, right, or top.



Surface Mount






Bulkhead Mount



Heating Capacity (BTU/Hr.)

REALTM 6300 Series Toe Space Hydronic Heaters

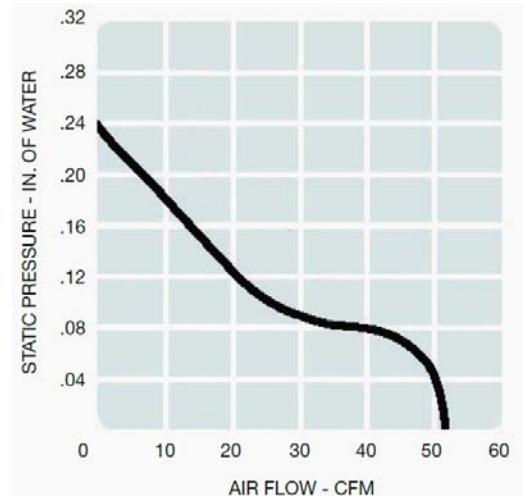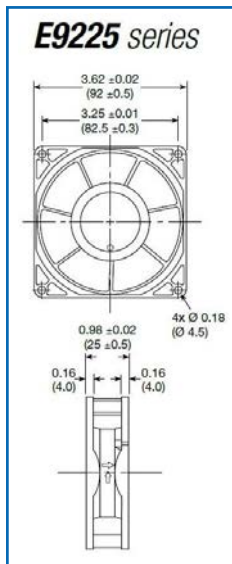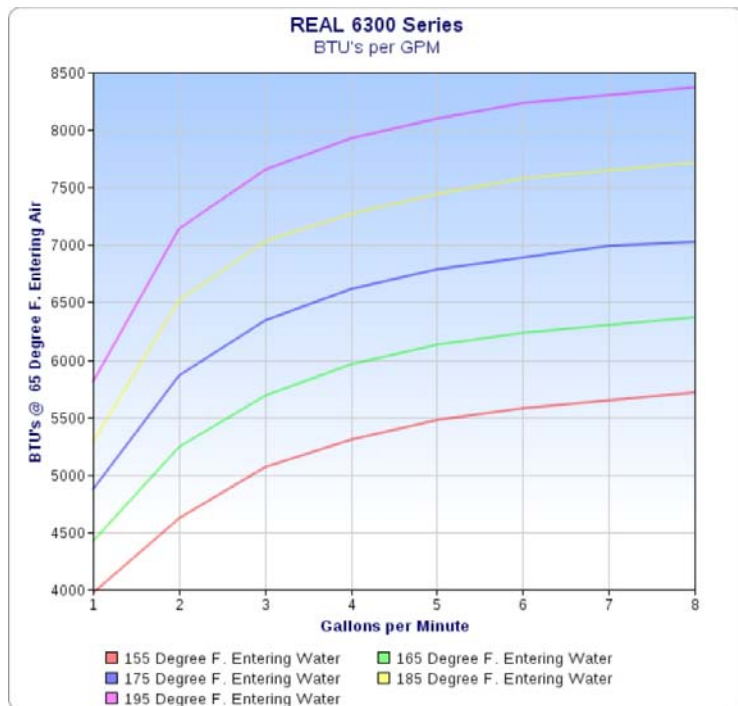

Model No.	Rated Voltage V	Current mA				Revolution RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight g
		5	12	24	48		M³/Min.	CFM	MM	INCH		
E9225H	12/24/48	-	360	168	65	3,200	1.44	51	6.00	0.24	36	111

6400 Series Hydronic Heaters

The **6400 Series REAL™** heaters have an output of up to **19,250 BTU's**. Typically, these heaters are used to heat state rooms and medium sized cabins. A **6400 Series REAL™** heater consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. Two low amp draw axial fans are mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including flat grilles and multiple hose outlets (from 1 to 6 vents). Models with an even number of outlets have a baffle that separates the two sides. Allowing for two separately controlled areas (with purchase of optional fan switches).

Available in 12 or 24 Volts. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
6400	6400B ¹	Flush Mount Fan Heater	2	6-11/16"	12-1/2"	6-7/8" *	10 lbs
	6400BR ¹	Brass Grill Flush Mount Fan Heater	2	6-11/16"	12-1/2"	6-7/8" *	10 lbs
	6400SS ¹	Stainless Grill Flush Mount Fan Heater	2	6-11/16"	12-1/2"	6-7/8" *	10 lbs
	6400W ¹	White Grill Flush Mount Fan Heater	2	6-11/16"	12-1/2"	6-7/8" *	10 lbs
	6414	Single 4" Ducted Fan Heater	2	6-3/4"	13-3/8"	9" *	11 lbs
	6423	Dual 3" Ducted Fan Heater	2	6-3/4"	13-3/8"	7-13/16" *	11 lbs
	6433	Triple 3" Ducted Fan Heater	2	6-3/4"	13-3/8"	7-13/16" *	11 lbs
	6424	Dual 4" Ducted Fan Heater	2	6-3/4"	13-3/8"	9" *	12 lbs
	6442.5	Quadruple 2-1/2" Ducted Fan Heater	2	6-3/4"	13-3/8"	7-3/4" *	13 lbs
	6462	Six 2" Ducted Fan Heater	2	6-3/4"	13-3/8"	7-13/16" *	16 lbs




¹Grill Measures 8-1/4" x 14-1/4"

* Bleeder fitting adds 2-3/8" to depth & 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ 6400 Series Hydronic Heaters

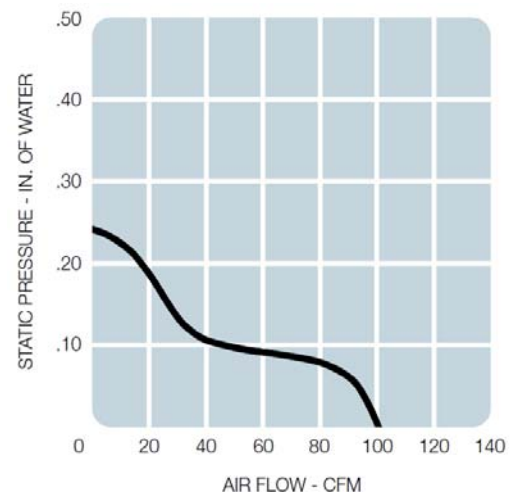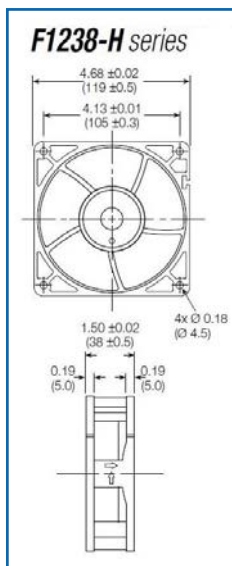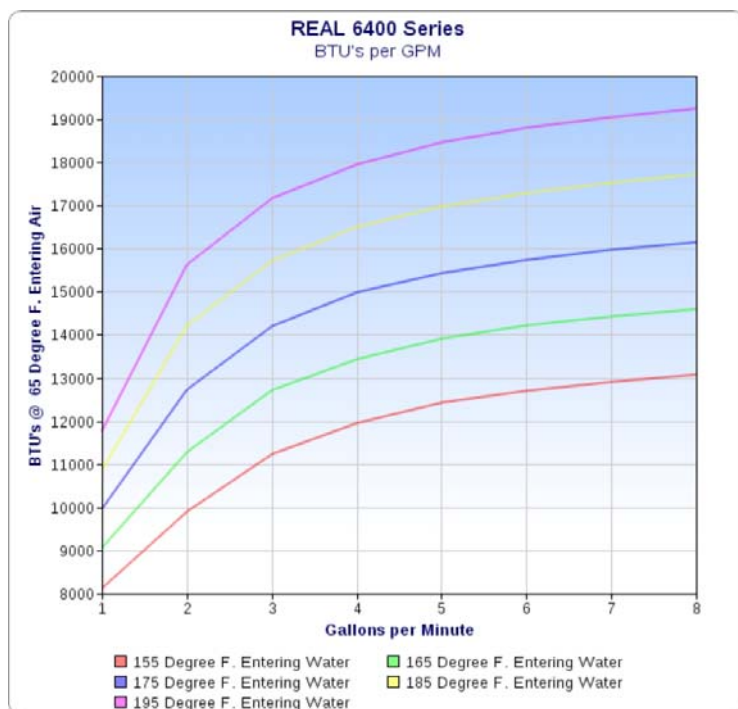

Model No.	Rated Voltage V	Current mA	Revolution RPM	Air Volume CFM	Maximum Static Pressure (in H ₂ O)	Sound Noise dBA	Weight oz
F1238M-H	12/24/48	5 12 24 48	2,700	103	0.24	38	9.45

*Per Fan

8000-LP Series Hydronic Combo Heater/Defrosters

The **8000-LP Series REAL™** heaters have an output of up to **9,700 BTU's** on the heater side and **14,000 BTU's** on the defrost side. Typically, these heaters are used on flying bridges or helm areas where both heat and window defrost are desired. The **8000-LP Series REAL™** is a unique blend of both a quiet low amp draw fan heater and a low profile defroster. By using two separate fans, divided by baffles, two heater types are contained in one compact package. The **8000-LP Series** consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A low amp draw axial fan and a low profile blower are mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including multiple hose outlets (from 2 to 6 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions




Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
8000-LP	8423-LP	Dual 3" Ducted Combo Heater/Defroster	2	6-11/16" *	13-3/8"	10-1/2"	14 lbs
	8424-LP	Dual 4" Ducted Combo Heater/Defroster	2	6-11/16" *	13-3/8"	11-11/16"	14 lbs
	843X-LP	Single 4" & Dual 2.5" Ducted Combo Heater/Defroster	2	6-11/16" *	13-3/8"	11-11/16"	14 lbs
	8442.5-LP	Quad 2.5" Ducted Combo Heater/Defroster	2	6-11/16" *	13-3/8"	10-7/16"	14 lbs
	845X-LP	Single 4" & Quad 2" Ducted Combo Heater/Defroster	2	6-11/16" *	13-3/8"	11-11/16"	16 lbs
	8462-LP	Six 2" Ducted Combo Heater/Defroster	2	6-11/16" *	13-3/8"	10-1/2"	16 lbs

* Bleeder fitting adds 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ 8000-LP Series Low Profile Hydronic Combo Heater/Defrosters

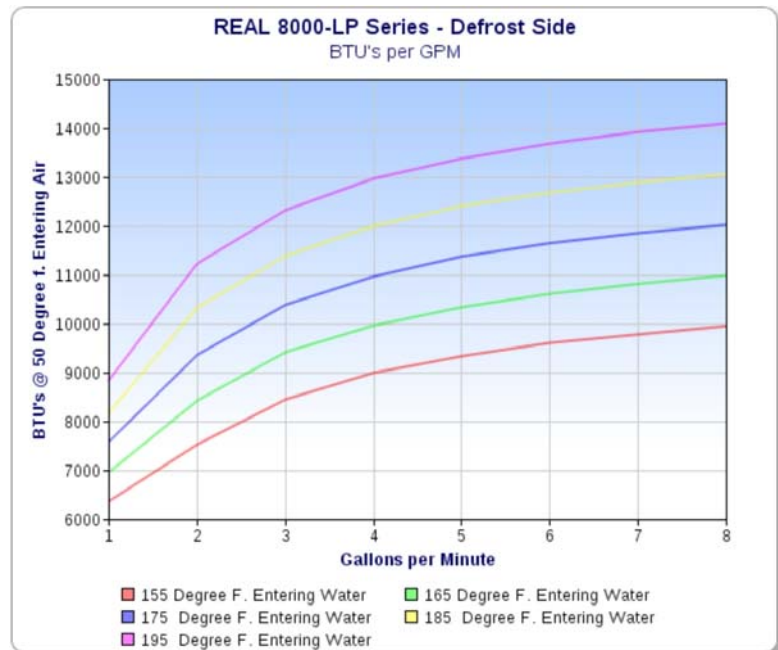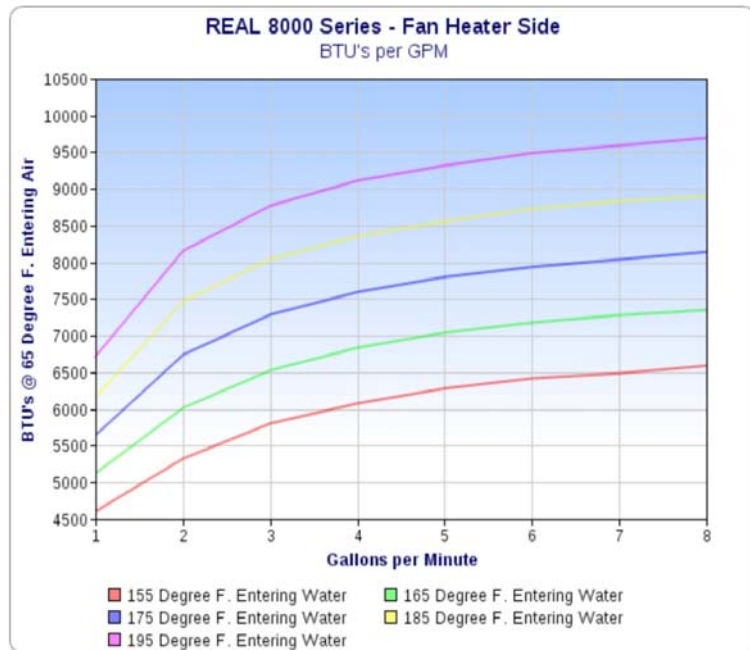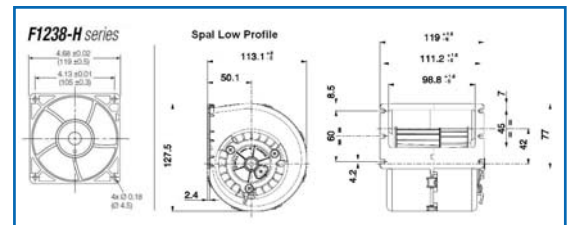

8000 Series Hydronic Combo Heater/Defrosters

The **8000 Series REAL™** heaters have an output of up to **9,700 BTU's** on the heater side and **18,300 BTU's** on the defrost side. Typically, these heaters are used on flying bridges or helm areas where both heat and window defrost are desired. The **8000 Series REAL™** is a unique blend of both a quiet low amp draw fan heater and a high output defroster. By using two separate fans, divided by baffles, two heater types are contained in one compact package. The **8000 Series** consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. A low amp draw axial fan and a high output blower are mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including multiple hose outlets (from 2 to 6 vents).

Available in 12 or 24 Volts. Comes with 3-speed switch. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions




Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
8000	8423	Dual 3" Ducted Combo Heater/Defroster	2	9-3/8"	13-3/8"	10-9/16"	15 lbs
	8424	Dual 4" Ducted Combo Heater/Defroster	2	9-3/8"	13-3/8"	11-3/4"	15 lbs
	843X	Single 4" & Dual 2.5" Ducted Combo Heater/Defroster	2	9-3/8"	13-3/8"	11-3/4"	14 lbs
	8442.5	Quad 2.5" Ducted Combo Heater/Defroster	2	9-3/8"	13-3/8"	10-1/2"	15 lbs
	845X	Single 4" & Quad 2" Ducted Combo Heater/Defroster	2	9-3/8"	13-3/8"	11-3/4"	17 lbs
	8462	Six 2" Ducted Combo Heater/Defroster	2	9-3/8"	13-3/8"	10-9/16"	17 lbs



Heating Capacity (BTU/Hr.)

REAL™ 8000 Series

Hydronic Combo Heater/Defrosters

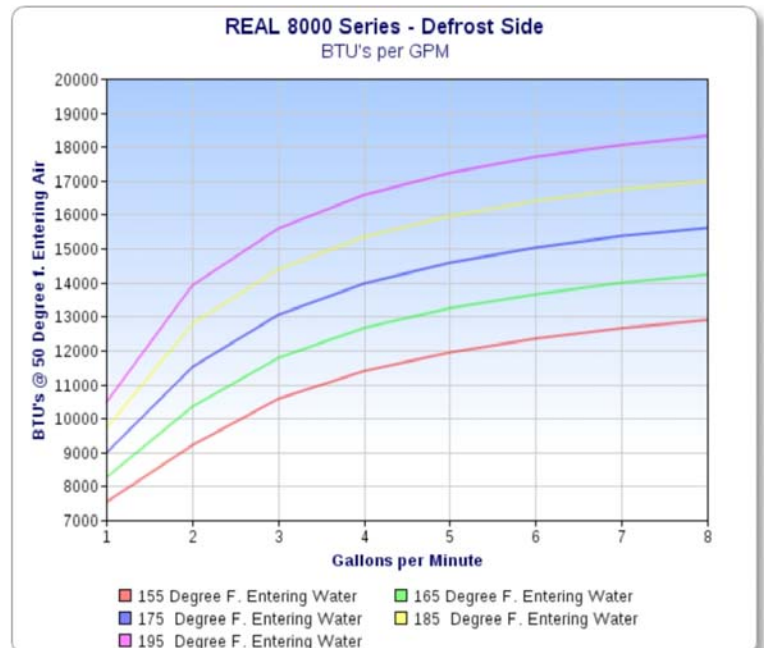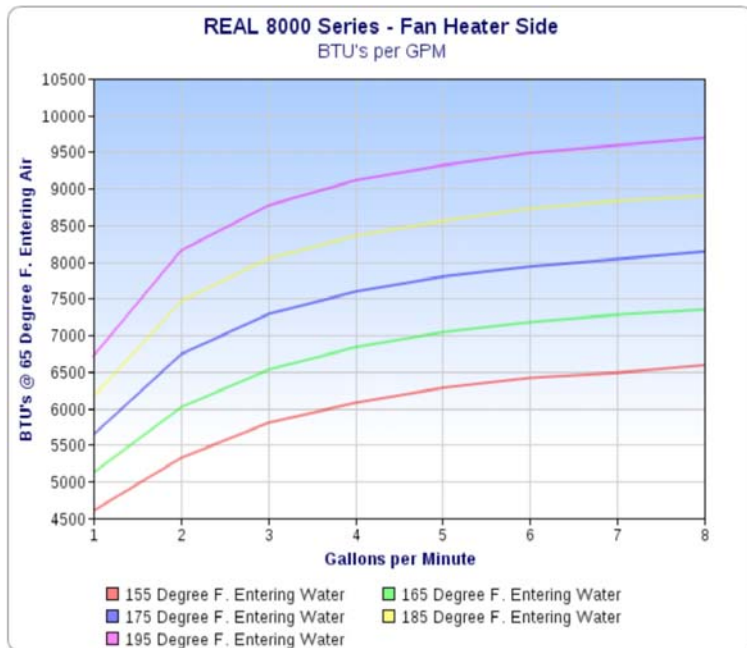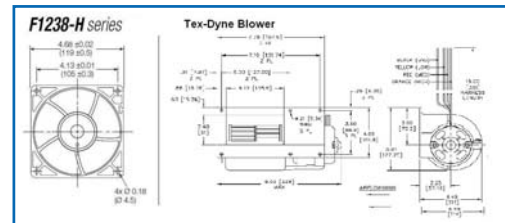

9000-LP Series Dual Blower Hydronic Defrosters

The **9000-LP Series REAL™** dual blower defrosters have an output of up to **14,000 BTU's per side**. A **9000-LP Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. Two low profile 3-speed blowers are mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including multiple hose outlets (from 1 to 6 vents). The **9000-LP Series REAL™** dual blower defrosters have a baffle that separate the two sides. Allowing for two separately controlled areas (by using the included switches) or twice the output in a single area.

Available in 12 or 24 Volts. Comes with two 3-speed switches. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions



Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
9000-LP	9423-LP	Dual 3" Ducted Dual Blower Defroster	2	6-11/16" *	13-3/8"	10-1/2"	13 lbs
	9424-LP	Dual 4" Ducted Dual Blower Defroster	2	6-11/16" *	13-3/8"	11-11/16"	13 lbs
	943X-LP	Single 4" & Dual 2.5" Ducted Dual Blower Defroster	2	6-11/16" *	13-3/8"	11-11/16"	14 lbs
	9442.5-LP	Quad 2.5" Ducted Dual Blower Defroster	2	6-11/16" *	13-3/8"	10-7/16"	14 lbs
	945X-LP	Single 4" & Quad 2" Ducted Dual Blower Defroster	2	6-11/16" *	13-3/8"	11-11/16"	16 lbs
	9462-LP	Six 2" Ducted Dual Blower Defroster	2	6-11/16" *	13-3/8"	10-1/2"	16 lbs

* Bleeder fitting adds 1/2" to height



Heating Capacity (BTU/Hr.)

REAL™ 9000-LP Series Low Profile Dual Blower Hydronic Defrosters

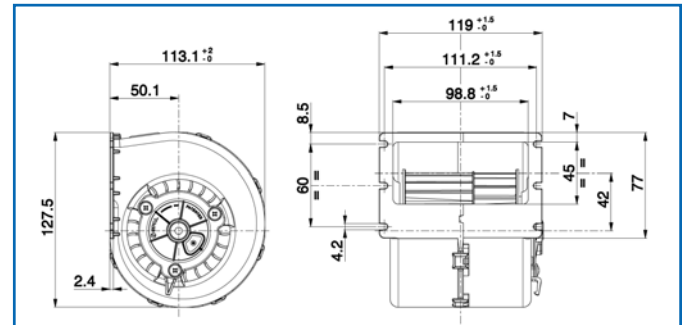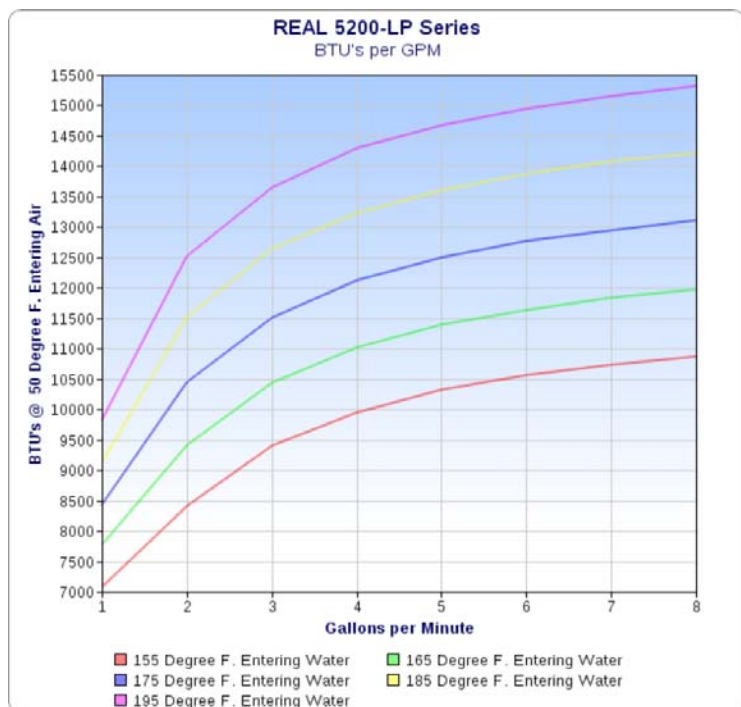

PERFORMANCE CHART

Static pressure mm H ₂ O	Airflow m ³ /h	Current input A	Airflow CFM	Static pressure in H ₂ O
0	260	5,3	153	0
5	240	4,8	142	0,2
10	220	4,5	130	0,4
15	200	4,3	118	0,6
20	180	4,2	106	0,8
25	160	4,0	94	1,0
30	130	3,6	77	1,2
35	100	3,4	59	1,4
40	60	3,1	35	1,6
45	40	2,8	24	1,8
50	0	2,7	0	2,0

Test voltage 13 V d.c.

9000 Series Dual Blower Hydronic Defrosters

The **9000 Series REAL™** dual blower defrosters have an output of up to **18,300 BTU's per side**. A **9000 Series REAL™** defroster consists of a heating core of copper tubes and aluminum fins surrounded by a powder coated aluminum case. Two 3-speed blowers are mounted at the rear of the unit and a variety of outlet options are available at the front of the unit including multiple hose outlets (from 1 to 6 vents). The **9000 Series REAL™** dual blower defrosters have a baffle that separate the two sides. Allowing for two separately controlled areas (by using the included switches) or twice the output in a single area.


Available in 12 or 24 Volts. Comes with two 3-speed switches. Grilles, clamps and ducting are included (for the ducted models). An air bleed fitting is included with each unit. 3/4" hose barbs are standard. Other hoses sizes as well as Pex or Wirsbo fittings are available.

Dimensions

Series	Model	Description	Number of Fans	Height	Width	Depth	Shipping Weight (lbs)
9000	9423	Dual 3" Ducted Dual Blower Defroster	2	9-3/8"	13-3/8"	10-9/16"	15 lbs
	9424	Dual 4" Ducted Dual Blower Defroster	2	9-3/8"	13-3/8"	11-3/4"	15 lbs
	943X	Single 4" & Dual 2.5" Ducted Dual Blower Defroster	2	9-3/8"	13-3/8"	11-3/4"	16 lbs
	9442.5	Quad 2.5" Ducted Dual Blower Defroster	2	9-3/8"	13-3/8"	10-1/2"	16 lbs
	945X	Single 4" & Quad 2" Ducted Dual Blower Defroster	2	9-3/8"	13-3/8"	11-3/4"	18 lbs
	9462	Six 2" Ducted Dual Blower Defroster	2	9-3/8"	13-3/8"	10-9/16"	18 lbs



Heating Capacity (BTU/Hr.) REAL™ 9000 Series Dual Blower Hydronic Defrosters

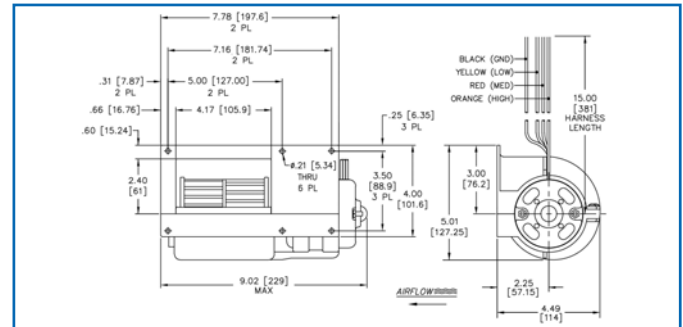


TYPICAL AIR PERFORMANCE @ 13.5VDC SCROLL BLOWER HI SPEED

STATIC PRESSURE IN H ₂ O	STATIC PRESSURE mm H ₂ O	CFM	m ³ /h	Amps
0	0.0	224	381	10.8
0.1	2.5	220	374	10.7
0.2	5	216	367	10.7
0.3	7.5	215	365	10.6
0.4	10	211	358	10.4
0.5	12.5	207	352	10.3
0.6	15	202	343	10.1
0.7	17.5	200	340	10.2
0.8	20	193	328	9.9
0.9	22.5	193	328	9.9
1.0	25	188	319	9.8
1.2	30	173	294	9.4
1.4	35	159	270	9.0
1.6	40	148	251	8.7
1.8	45	131	223	8.2

Expansion Tanks

For proper water circulation through the heating system, an expansion tank is required. An expansion tank allows for the expansion and contraction of the system when it heats up and cools off and provides head pressure for the circulation pump.

The size of the heating system, installation and space restrictions will dictate which tank is best for you.

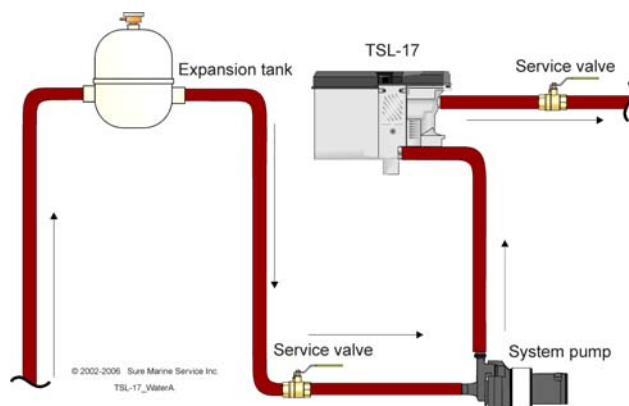

W002-674 5" Horizontal Expansion Tank

W002-103CH 6" Horizontal Expansion Tank

The 5" and 6" horizontal expansion tanks are made of copper and include 3/4" hose barbs and a pressure cap. These tanks can be used in small Webasto heater installations such as the TSL-17.

Measurements: (Tank body)

5" HORIZ- 10 1/4" LONG X 5" DIA. UP TO 5.0 GAL. SYSTEM
 6" HORIZ- 14 1/2" LONG X 6" DIA. UP TO 9.5 GAL. SYSTEM



W002-512 5" Vertical Expansion Tank

W002-103CV 6" Vertical Expansion Tank

Like our horizontal tanks, the vertical tanks are made of copper and include 3/4" hose barbs and a pressure cap. They can be used in small Webasto heating systems.

Measurements: (Tank body)

5" VERT- 11" L X 5" DIA. UP TO 5.0 GAL. SYSTEM
 6" VERT- 15" L X 6" DIA. UP TO 9.5 GAL. SYSTEM



W002-103SS-V

W002-103SS-H

5" Stainless Vertical Expansion Tank

6" Stainless Horizontal Expansion Tank

New! Vertical and Horizontal Stainless tanks. These stainless tanks include mount, 3/4" hose barbs and a pressure cap. They can be used in small Webasto heating systems.

Measurements: (Tank body)

6" VERT- 10" L X 6" DIA. 1.2 GALLON CAPACITY
 6" HORIZ- 10" L X 6" DIA. 1.2 GALLON CAPACITY



Expansion Tanks

Expansion Tanks

W002-102A 1 gal. Expansion Tank

This 8" x 6" x 6" aluminum expansion tank comes with (3x) 3/4" FNPT fittings, sight gauge and 7# pressure cap. It can be used in Webasto or other marine hydronic heating systems with up to a 5 gallon capacity like the TSL17. Must be installed at the highest point.

Overall Tank Measures:

10" Wide x 7-1/8" High x 7-7/8" Deep.
 The 5/16" hose barb fitting near the pressure cap allows for installation of our plastic overflow tank (sold separately).



W002-103A 2 1/2 gal. Expansion Tank

This 12" x 8" x 8" aluminum expansion tank comes with (3x) 3/4" FNPT fittings, sight gauge and 7# pressure cap. It can be used in Webasto or other marine hydronic heating systems with over 10 gallons capacity like the DBW2010. Must be installed at the highest point.

Overall Tank Measures:

14" Wide x 9-1/8" High x 9-7/8" Deep.
 The 5/16" hose barb fitting near the pressure cap allows for installation of our plastic overflow tank (sold separately).



W002-105 5 gal. Expansion Tank

This 12" x 12" x 8" aluminum expansion tank comes with (3x) 3/4" FNPT fittings, sight gauge and 7# pressure cap. It can be used in Webasto or other marine hydronic heating systems with over 10 gallons capacity like the DBW2020. Must be installed at the highest point.

Overall Tank Measures: 14" Wide x 13-1/8" High x 9-7/8" Deep. The 5/16" hose barb fitting near the pressure cap allows for installation of our plastic overflow tank (sold separately).



W002-105AB 5 gal. Buffer Tank

With a buffer tank you can raise the water volume of a system to increase efficiency.

This 12" x 12" x 8" aluminum buffer tank comes with (3x) 3/4" FNPT fittings and air bleed screw. The greater volume of water your marine hydronic heating system has the less likely it will short cycle. May be installed at any point in the system.

Overall Tank Measures: 14" Wide x 9-1/8" High x 12-3/4" Deep (including mounting flanges and bleeder).



001-395 Plastic Overflow Tank Kit

Similar to the overflow tank on your engine, the plastic overflow tank is designed to hold coolant that escapes from the pressure cap on an expansion tank. The kit includes a mount rack and hardware for mounting and connection to the expansion tank.

Measurements:

8" HIGHT x 6 1/2" WIDE x 4 3/4" DEEP



Circulation Pumps

Johnson Pump



These Johnson Pumps are commonly used as engine preheat pumps and for small heating systems.

CM10P7-1 12v, Flow: 4.0 gpm @ 3.3' head
CM30P7-1 12v, Flow: 6.9 gpm @ 3.3' head
CM90P7-1 12v, Flow: 30.4 gpm @ 3.4' head

also available in 24 volt

Webasto 4810



The Webasto 4810 is a 3/4" outlet pump for systems up to 75 ft in total length. It is available in 12 or 24 volt.

W458-414 12v, Flow: 6 gpm @ 5' head
W458-422 24v

Webasto 4846 Mag-Drive



The Webasto Mag-Drive pump is a 3/4" outlet pump that can be used in systems up to 100 feet in total line length. It operates with a magnetic coupling between the motor and the impeller which eliminates the chance for a shaft seal leak.

W359-36A 12v, Flow: 7 gpm @ 5' head
W359-38A 24v

Proheat Mag-Drive



The Pro Mag-Drive pump is a 3/4" outlet pump that can be used in systems up to 100 feet in total line length. Like the Webasto 4846, it operates with a magnetic coupling between the motor and the impeller which eliminates the chance for a shaft seal leak.

940326K 12v Flow: 8 gpm @ 5' head
942820K 24v

Circulation Pumps

MP1200

The MP 1200 is a 1" outlet pump. It can be used in systems up to 125 feet in total length (single loop). The MP 1200 kit includes isolation valves and 3/4" hose adapters.

MP1200-12 12v, Flow: 15 gpm @ 5' head
MP1200-24 24v



Webasto 4814

The Webasto 4814 pump is a 1 1/2" outlet pump used in the larger heating systems.

W431-49B 12v, Flow: 26 GPM @ 5' head
W431-50A 24v



MP12000

The MP 12000 is a 1 1/2" outlet pump used in the larger heating systems such as the DBW 2020/300 or the Olympia Boiler.

MP12000-12 12v, Flow: 22 gpm @ 5' head
MP12000-24 24v



UPS15

dc-ac Interlock

The UPS15 is an AC line voltage pump that can be interfaced to your DC heating system. When used with a pump interlock box, the pump will be controlled by a DC source while running on AC.

UPS15-58F 110ac, Flow: 13.5 gpm @ 5' head
UPS26-99F 110ac, Flow: 29 gpm @ 5' head
W003-001 12vdc-110ac Interlock Box
W003-002 24vdc-110ac Interlock Box



Heat Exchangers

Water-to-water heat exchangers are commonly employed to use engine heat in a heating system. Instead of wasting engine heat overboard it can be recovered through the heat exchanger and pumped through your heating system saving burner run time and fuel.

Finding the proper heat exchanger for your system is important so that the system performs as well on the engine heat setting as when the burner is running. Heat output should be considered when choosing a heat exchanger for proper performance.




W001-225 2" x 19" Heat Exchanger

The 2" x 19" heat exchanger is rated to 20,000 btu. It is made of copper and has $\frac{3}{4}$ " NPT female fittings for hose barb installation. The kit includes four $\frac{3}{4}$ " NPT x $\frac{3}{4}$ " hose barbs and two mounts. If needed $\frac{5}{8}$ " hose barbs are available.

W001-235 3" x 22" Heat Exchanger

The 3" x 22" heat exchanger is rated to 30,000 btu. It is made of copper and has $\frac{3}{4}$ " NPT female fittings for hose barb installation. The kit includes four $\frac{3}{4}$ " NPT x $\frac{3}{4}$ " hose barbs and two mounts. If needed $\frac{5}{8}$ " hose barbs are available.

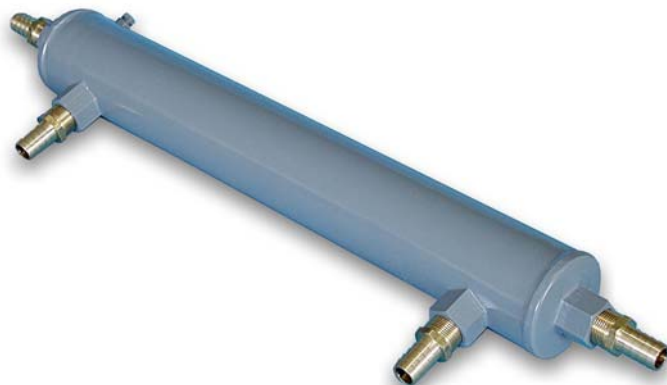

W001-236- $\frac{3}{4}$ " 4" x 24" Heat Exchanger-- $\frac{3}{4}$ " Fittings
W001-236-1 $\frac{1}{4}$ " 4" x 24" Heat Exchanger--1 $\frac{1}{4}$ " Fittings

The 4" x 24" heat exchanger is rated to 40,000 btu. It is made of copper and comes in two variations. The $\frac{3}{4}$ " variation comes with four $\frac{3}{4}$ " NPT fittings for hose barb installation. The 1 $\frac{1}{4}$ " variation comes with two $\frac{3}{4}$ " NPT connections for engine connection and two 1 $\frac{1}{4}$ " NPT connections for heater connection.




Water Systems

Water System Equipment

	Ball Valve This valve has a brass body and a stainless steel ball. 002-763 3/8" Ball Valve 002-272 1/2" Ball Valve 002-621 3/4" Ball Valve 002-622 1" Ball Valve 001-913 1 1/4" Ball Valve	Ball Valve Hose to Hose 002-621S 3/4" Hose Ball Valve 002-621S-1 1" Hose Ball Valve	
	Ball Valve 3/4" hose to 3/4" male NPT pipe 002-624 Ball Valve	Ball Valve 3/4" hose to 3/4" female NPT pipe 002-623 Ball Valve	
	Boiler Drain Valve Tee GHT drain valve x FNPT tee. 40613 GHT x 3/4" FNPT	Boiler Drain Gate Valve GHT drain valve x NPT pipe. 001-392 GHT x 1/2" NPT 001-394 GHT x 3/4" NPT	
	Three-way Valve For use as a selector valve in a summer loop system. 001-172 1/2" 3-way valve 001-173 3/4" 3-way valve 001-173 1" 3-way valve 001-174 1 1/4" 3-way valve	Gate Valve This valve is constructed with a brass body and gate. 002-498 3/4" Gate Valve 002-849 1" Gate Valve 001-168 1 1/4" Gate Valve	
	Coolant System Manifold Some installations call for a manifold with multiple loops for proper installation. WSH4TK Manifold Kit (as pictured with valves) WSH4B Brass Manifold only 6 Zone Manifolds Also Available	WSMS-BYPASS This valve is constructed with a brass body and gate and is designed to bypass water into 5/8" water heater heat exchangers without restricting flow to the 3/4" heating system. WSMS-BYPASS Valve	

Water System Equipment

	Air Bleeder 001-411 1/8" NPT Air Bleed 263262 key for air bleed (not pictured)	Vent Tee for 1/8" NPT CC-120SF 1/2" NPT x 1/2" FNPT CC-120SJ 3/4" NPT x 3/4" FNPT Use with 001-411 Air Bleed for a bleeder that can be installed inline between pipe fittings. Add hose barbs for inline hose air bleeds.	
	Auto Bleeder 001-098 1/8" NPT Use with 001-411 Air Bleed for a bleeder that can be installed inline between pipe fittings. Add hose barbs for inline hose air bleeds.	Super Vent & Power Vent PV-075 3/4" NPT PV-125 1-1/4" NPT Eliminates air from system without bleeding.	
	Rubber Hose Reinforced specifically for use in heating systems. 001-871 3/8" Red 001-452 5/8" " 001-453 3/4" " 001-459 1 1/2" Black, Wire Wound	PEX Tubing Polyethylene tubing designed to ease installation. PEX tubing is a complete system that uses specific fittings. Contact an SMS salesperson for details.	
	Coolant Treatment Kit To reduce corrosion and ensure a long life for your system, a coolant treatment kit should be used. WSMS-009 Water Treatment Kit BWFC-12 Replacement Filter	Coolant Treatment Used to maintain the Ph level in your coolant system and to lubricate the pump. 24056 Coolant Treatment	
	Ph Test Strips For analyzing the Ph level of your coolant system. 311519 Ph Test Strips	Baseboard Tubefin Radiant heat from traditional copper tube and aluminum fin baseboard heaters. W001-049 2x2 500 btu/ft. W001-050 3x3 750 btu/ft. W528-54 4x4 1000 btu/ft.	

Everhot



Everhot Tankless Water Heater

The Everhot is a tankless water heater designed to heat your domestic water on demand. The Everhot does not store water for heating, it uses a heat exchanger that heats domestic water in a single pass through. Once installed in a heating system, the Everhot will provide hot water to your sinks or shower (assuming your heating system is running).

Every model except the #4 is available in vertical or horizontal configurations.

The Everhot you choose should be based on the output of the potable water pumps on your boat.

Everhot Shelf Mount

Gives extra support for vertical 4 gallon and 6 gallon Everhot's. Especially good for use on boats often underway in heavy seas. The bracket is made of extra heavy gauge Aluminum and powder-coated white. The strap is stainless steel.



Everhot Mount Hoops

The Everhot's boiler fittings enter on the side of the unit and exit from the bottom. To accommodate this design, SMS offers mounting hoops that can mount any Everhot to a bulkhead. The hoops are made of Aluminum and are powder-coated white.

W002-895 Everhot Mount Hoop


Model #	Gallons Per Minute	Weight (Pounds)	Dimensions Diameter x Height
W001-105	4	33	12 3/4" x 16 1/4"
W001-106	6	37	12 3/4" x 18 1/4"
W001-111	8	43	12 3/4" x 20 1/4"
W001-108	10	51	12 3/4" x 22 1/4"
W001-110	12	57	12 3/4" x 25 1/4"

Mixing Valve

The hot water coming from the Everhot will be around 150 degrees fahrenheit and without any temperature control, it may lead to injury. This thermostatic mixing valve is an adjustable valve that will cool the water to a desirable, safe temperature.

WAM-101 Thermostatic Mixing Valve

Also Available with 1/2" NPT, 3/4" NPT, Sweat and Union Fittings

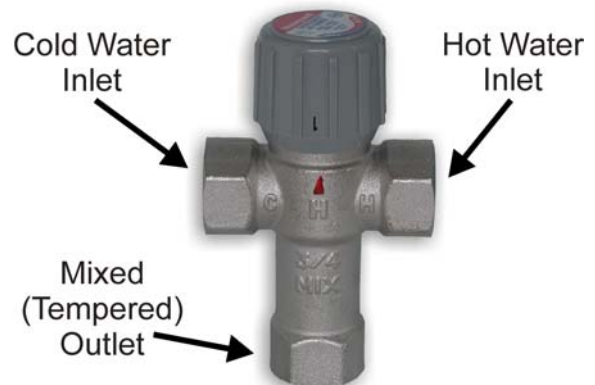

Domestic Water Systems



The **Seaward** hot water tank is a traditional style marine hot water tank. It has a heat loop for connection to a heating system as well as an AC electric heating coil. The Seaward tank has an aluminum internal domestic tank and is available with either a stainless steel or galvanized external shell. The Seaward is available in sizes ranging from 6 gallons to 20 gallons.



Model #	Capacity	Heat Exchanger Connections	Casing Material	Dimensions Width x Depth x Height in Inches
S600	6 gal.	Back	Galvanized	13 x 19 x 13
F600	6 gal.	Front	Galvanized	13 x 19 x 13
S700	6 gal.	Back	Stainless	13 x 19 x 13
F700	6 gal.	Front	Stainless	13 x 19 x 13
S1100	11 gal.	Back	Galvanized	16 x 22 x 16
F1100	11 gal.	Front	Galvanized	16 x 22 x 16
S1200	11 gal.	Back	Stainless	16 x 22 x 16
F1200	11 gal.	Front	Stainless	16 x 22 x 16
S1800	20 gal.	Back	Galvanized	20¼ x 20¼ x 27
S1900	20 gal.	Front	Stainless	20¼ x 20¼ x 27
H2000	20 gal.	Back	Galvanized	16 x 32 x 16
HF2000	20 gal.	Front	Galvanized	16 x 32 x 16
H2200	20 gal.	Back	Stainless	16 x 32 x 16



Camco is a traditional marine hot water tank. It has a heat loop for connection to a heating system and an AC electrical coil. It is constructed of an aluminum water tank with a stainless steel external shell. The Camco is available in 6, 11 and 20 gallon models.

Model #	Capacity	Heat Exchanger Connections	Dimensions Width x Depth x Height in Inches *not including mounting tabs	Mounting Tabs	Voltage
11810	6 gal.	Front	13-5/8" x 19-1/8" x 13-5/8"	Side	120 Volt
11811	6 gal.	Front	13-5/8" x 19-1/8" x 13-5/8"	Front / Back	120 Volt
11812	6 gal.	Rear	13-5/8" x 20-1/2" x 13-5/8"	Front / Back	120 Volt
11830	6 gal.	Front	13-5/8" x 19-1/8" x 13-5/8"	Side	240 Volt
11831	6 gal.	Front	13-5/8" x 19-1/8" x 13-5/8"	Front / Back	240 Volt
11832	6 gal.	Rear	13-5/8" x 20-1/2" x 13-5/8"	Front / Back	240 Volt
11840	11 gal.	Front	16-1/8" x 21-5/8" x 16-1/8"	Side	120 Volt
11841	11 gal.	Front	16-1/8" x 21-5/8" x 16-1/8"	Front / Back	120 Volt
11842	11 gal.	Rear	16-1/8" x 23 x 16-1/8"	Front / Back	120 Volt
11860	11 gal.	Front	16-1/8" x 21-5/8" x 16-1/8"	Side	240 Volt
11861	11 gal.	Front	16-1/8" x 21-5/8" x 16-1/8"	Front / Back	240 Volt
11862	11 gal.	Rear	16-1/8" x 23 x 16-1/8"	Front / Back	240 Volt





Torrid Marine™ Water Heaters are the perfect solution for onboard domestic hot water needs. Designed specifically for the marine environment, these water heaters are known around the globe as the leader in durability, performance, and efficiency.

Jackets Brushed stainless steel.

Inner Tanks Much like a coffee thermos, Torrid™ tanks are glass lined with complete maintainable anode protection system. The tank exteriors are powder coated and foam-insulated for optimum performance. 5 year warranty is included on the tank.

Elements Stainless steel Incoloy sheathed elements installed.

Power 120V 1500W standard configuration.

Heat Exchangers Silicon-bronze inlet / outlet fitting with tin plated copper exchanger.

AT A GLANCE features:

- Glass lined, powder coated inner tank
- Foam insulation
- REMOVABLE Heat Exchangers
- Incoloy Sheathed Elements
- Adjustable Thermostats
- 100% replaceable parts
- 120V or 240V

Model #	Capacity	Heat Exchanger	Casing Material	Overall Dimensions Diameter x Height in Inches
MVS6	6 gal.	Standard	S/S	14 x 17.25
MVS10	10 gal.	Standard	S/S	16 x 17.75
MVS15	15 gal.	Standard	S/S	16 x 23.75
MVS17	17 gal.	Standard	S/S	16 x 28.25
MVS20	20 gal.	Standard	S/S	20 x 22.25
MVS30	30 gal.	Standard	S/S	20 x 30.25
MVS40	40 gal.	Standard	S/S	22 x 33
MVS50	50 gal.	Standard	S/S	22 x 41
MVS65	65 gal.	Standard	S/S	20 x 59
MVS80	80 gal.	Standard	S/S	22 x 58

Model #	Capacity	Heat Exchanger Connections	Casing Material	Overall Dimensions Width x Depth x Height in inches
MHS6	6 gal.	Front	Stainless	14.125 x 21 x 14.50
MHS10	10 gal.	Front	Stainless	14.125 x 29 x 14.50
MHS17	17 gal.	Front	Stainless	15.50 x 31 x 16.50





Isotemp Basic, Slim and Square



- Robust design
- Tanks made of 316 grade stainless for long life
- External cover is 304 grade stainless steel
- Stainless steel mounting brackets encircle the body for deck or bulkhead installations.
- 360 ° adjustable mounting allows proper orientation for horizontal or vertical installation (valves down) on bulkheads

Product Specifications:

- Slim, Basic, and Square designs fit all spaces: Slim is smaller diameter and longer, Basic is larger diameter and shorter, Square is rectangular shape to fit tight locations.
- Extra long, corrugated coils for high heat exchanger efficiency
- Special 7.0 bar/100 psi safety valve makes winterization easy with a simple valve turn
- Ultra-thick insulation for lowest temperature loss
- Nickel-plated copper immersion heating element for long life is positioned to heat colder water at the bottom of the tank
- Thermostat controlled mixing valve extends volume of hot water and protects against accidental scalding.
- Optional heating element available in 1200, 2000, and 3000 watts on some models (2000 & 3000 watt heating elements are only compatible with 230 V versions)

Part number	Model	Volume (Gallons)	Dimensions L x ØD (Inches)	Weight (Pounds)	Max. pressure (Bar)	Immersion heater**
601521S000003	Slim 15	4	21 x 12	23	7.0	115 V / 750 W
602021S000003	Slim 20	5.3	26 x 12	25	7.0	115 V / 750 W
602521S000003	Slim 25	6.5	31 x 12	30	7.0	115 V / 750 W
602421B000003	Basic 24	6.4	19 x 16	31	7.0	115 V / 750 W
603023B000003	Basic 30	8	22 x 16	37	7.0	115 V / 750 W
604021B000003	Basic 40	11	26 x 16	44	7.0	115 V / 750 W
605021B000003	Basic 50	13	31 x 16	51	7.0	115 V / 750 W
607521B000003	Basic 75	20	42 x 16	64	7.0	115 V / 750 W
Square			Dimensions L x ØD (Inches)			
601621Q000003	Square 16	4.2	16 x 7 x 23	35	5.5	115 V / 750 W
Double Coil			Dimensions L x ØD (Inches)			
604021BDT0003	Basic 40 TCT	11	26 x 16	45	7.0	115 V / 750 W
607521BDT0003	Basic 75 TCT	20	42 x 16	65	7.0	115 V / 750 W

* Including thermostat mixing valve; ** Immersion heater 230 V/750 W also available. Material: Tank, engine water coil and all connections AISI 316; Outside cover and mounting feet: AISI 304; Electric immersion heater: Copper covered by Nickel; Insulation: Polyurethane; Water connections: 1/2" inside and outside NPT and BSP pipe thread. Changes of the specification may be done without prior notice.

** The stainless steel outside cover as well as the mounting feet are made of non magnetic stainless steel AISI 304. The Basic 40 and 75 liters water heaters are also available in a special version with double engine water coils for connection to the engine as well as to water based on board heater system.

Isotemp SPA Line Marine Water Heaters

The new SPA line of stainless steel water heaters



New Isotemp SOA line of cost-efficient Stainless Steel Marine Water Heaters

The new line of SPA Water Heaters were designed to help boat builders and boat owners who want a higher quality water heater than the aluminum units commonly used on new boats. The new SPA features the highest marinequality standards while providing an optimized cost /quality ratio with a new polypropylene shell and safety mixing valve. The new SPA line compliments the ISOTEMP Stainless Steel Water Heaters universally recognized as the best in the industry.

- 5 different volumes from 15 to 40 liters
- AISI 316 grade stainless steel inner tank
- 6 bar safety valve
- Thermostat controlled mixing valve extends volume of hot water and protects against accidental scalding.
- Extra thick insulation for high performance
- Outer casing made of high quality polypropylene
- 115 or 230 volt, 750 watts for high performance, low power draw.

Part number	Model	Volume (Gallons)	Dimensions L x ØD (Inches)	Weight (Pounds)*	Max. pressure (Bar)	Heating element	Nominal power (watts)
6P1531SPA003 6P1523SPA003	Spa 15	4	12.4 x 19	16	6	230 V	750 std
						115 V	750 std
6P2031SPA003 6P2023SPA003	Spa 20	5.3	12.4 x 23	18	6	230 V	750 std or * 1200
						115 V	750 std
6P2531SPA003 6P2523SPA003	Spa 25	6.5	12.4 x 27	21	6	230 V	750 std or * 1200
						115 V	750 std or * 1200
6P3031SPA003 6P3023SPA003	Spa 30	8	15.4 x 24	26	6	230 V	750 std
						115 V	750 std
6P4031SPA003 6P4023SPA003	Spa 40	411	15.4 x 26	29	6	230 V	750 std or * 1200
						115 V	750 std or * 1200

* Higher wattage elements are optional

Thermostats

All of these thermostats utilize a positive on/off snap-type action. Mercury or millivolt type thermostats will not perform properly in a marine environment. All thermostats sold can be used as main system controllers or for zone control.

Some units feature an integral on/off switch for manual control of the entire heating system. Others can be used in conjunction with a separate switch.



Webasto Thermostat


The Webasto Thermostat is available with or without an integral on/off switch for manual heater control. The on/off model can be used for main heater control for the AT series heaters. Available only in black.

W709-47A Thermostat with on/off switch
W250-11C Thermostat

Robertshaw Thermostat

The Robertshaw thermostat has a range of 50° to 90° F and can be used for both main heater and zone control. This thermostat must be installed with a separate on/off switch when used as the main heater control. Available in white.

W001-467 Robertshaw Thermostat

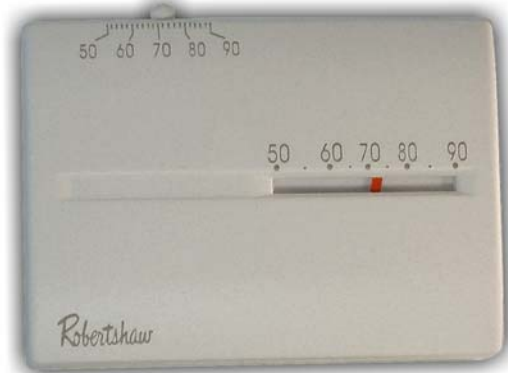

Thermostats

SC 1600W Digital Thermostat

The SC 1600W thermostat is a digital thermostat with a temperature range of 45°-90° F and an integral on/off switch and backlit display.

Due to marine requirements of a lighted control a separate on/off switch would have to be used for main heater control.

SC1600L-WHITE

SC1600L-WHITE Digital Thermostat



SC 1600L-BLACK Digital Thermostat

The SC 1600L thermostat is a digital thermostat with a temperature range of 45°-90° F with light and backlit display and on/off switch. Temperature differential can be adjusted 1-3 degrees.

Due to marine requirements of a lighted control a separate on/off switch would have to be used for main heater control.



SC1600L-Black

SC1600L-WHITE Digital Thermostat Digital

Aube Thermostat

The Aube thermostat has separate night and day programmable settings. Temperatures can be set higher for night and lower for day to suit your needs. This thermostat must be used with a separate on/off switch for main heater control. Available only in white/grey combination as pictured.

TH135-01

Aube Thermostat



Surewire Board

Surewire Air

The Surewire Air board puts all electrical connections into one place making installation and troubleshooting of your heater easier than ever before. The Surewire Air is for all Webasto air heaters. Features include:

- o Hour meter to track run time of the heater
- o Breaker protection of heater in one convenient place
- o Fuel pump priming button.
No more disconnecting or bridging wires.



Surewire Water

The Surewire Water not only puts all heater electrical connections in one place, it also puts all fan heater connections in the same place. No need to install separate parts, simply hook the thermostats and fans to the Surewire board. Features include:

- o Hour meter to track run time of the heater
- o Breaker protection for heater and fan heaters
- o Fuel pump priming button
(for TSL 17 and Thermo Pro 90)



Electrical Systems


System Controls

	W005-378K System Heat Switch Kit For heater system control. It can be used on all heating systems.	Inline Aquastat For control of system fan heaters. It will keep all fans in the system off until the system reaches 120 degrees F. W005-212-KIT Inline Aquastat (3/4" Female NPT) W005-212MPT Inline Aquastat (3/4" Male NPT) W005-213-KIT Clip-On Aquastat KIT for 3/4" Hose W005-213-REAL Clip-On Aquastat KIT for REAL fans 005-174 Replacement bolt on Aquastat switch 005-213 Replacement clip on Aquastat switch	
	W005-376K System Heat-Engine Heat Switch Kit Main heater system control including engine heat position. It can only be used on water heaters with engine heat capability.	Diode Board A diode board is required for multi-zone water systems to work properly. Available with four or six zones W005-132 4-Zone Diode Board W005-133 6-Zone Diode Board	
	W005-377K System Heat-Engine Preheat Switch Kit Main heater system control including engine heat and separate engine preheat. Only for engine heat capable heaters.	Relay Installation requirements may call for a relay to be used to protect sensitive control parts by use of a relay. Available in 12 or 24 volt. 90-100 12v Relay VF445H11 24v Relay 90-103 Relay Socket	
Individual Parts 031-549 Two Position Switch 031-551 Three Position Switch W005-378 System Heat Plate W005-376 System Heat-Engine Heat Plate W005-377 Sys. Heat-Eng/Heat-Eng. Preheat Plate 250WL7G Indicator Light		System Breaker A main system breaker available in 15, 20, and 30 amp to protect the entire heating system. Includes rubber wire connector protectors. 75135K-15 15 amp Breaker 75135K-20 20 amp Breaker 75135K-30 30 amp Breaker	
	Everhot/Water Tank Aquastat Controls the heater based on the temperature of the domestic water system. For water systems only. W002-880 HWT Aquastat (3/4" NPT) W002-890 Everhot Aquastat (1/2" NPT)	Breaker For protection of sensitive heater controls. 005-133 5 amp Breaker 005-134 10 amp Breaker 005-166 15 amp Breaker 005-135 20 amp Breaker 005-136 30 amp Breaker	

Exhaust (Metric)

22mm Exhaust

The Webasto AT 2000S and TSL-17 both use 22mm exhaust. Because of the lower temperatures from the AT 2000S and TSL-17, they can be installed with flexible exhaust. Prefabricated rigid exhaust parts are available to make bends that the flex cannot. All 22mm exhaust components are 316 stainless steel.

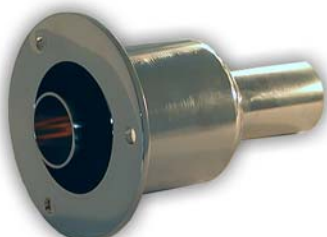

W002-170
22mm Thru Hull

Horizontal outlet exhaust thru hull. Includes heat-resistant gaskets.

W915-64A-22ND
22mm Elbow

90 degree angle for a sharp turn directly off of the heater.



W002-170NUT
22mm Threaded Thru Hull

Threaded horizontal outlet thru hull. Includes heat-resistant gaskets.

W915-64A-22
22mm Elbow Drain

Condensation drain for installation directly off of the heater.



W002-170-30
22mm Angled Thru Hull

Angled thru hull. Includes hardware and heat-resistant gaskets.

W005-101 22mm Water Drain Tee

Condensation drain for installation in line with the exhaust.



W002-170NUT-90
22mm 90 Degree Thru Hull

Thru hull with 90 degree elbow attached for tight installations. Includes heat-resistant gaskets.

W002-740
22mm Exhaust Muffler

In-line muffler to quiet combustion noise from the heater.




W337-390
22mm Flexible Exhaust

Stainless steel flexible exhaust available to be cut to length.



W002-744-22
W002-744-22-SHORT
22mm Stainless Steel Exhaust Water Box
 Mounts to thru-hull (inside the boat) to discourage water entry into exhaust. The canister is 4" in diameter and is available either 4" (short) or 6" tall. Comes with exhaust blanket.

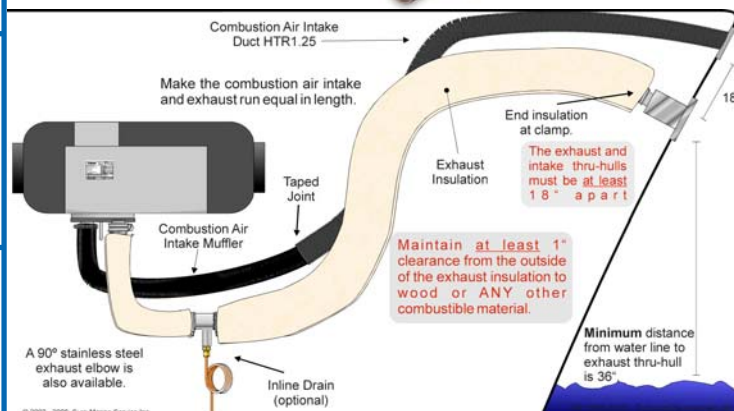

Exhaust (Metric)

24mm Exhaust

The Webasto AT 3500 and AT 5000 both use 24mm exhaust. Because of the lower temperatures from the AT 3500 and AT 5000, they can be installed with flexible exhaust. Prefabricated rigid exhaust parts are available to make bends that the flex cannot. All 24mm exhaust components are 316 stainless steel.



W002-172NUT
24mm Threaded Thru Hull

Threaded horizontal outlet thru hull. Includes heat-resistant gaskets.

W915-64A-ND
24mm Elbow

90 degree angle for a sharp turn directly off of the heater.



W002-172-30
24mm Angled Thru Hull

Includes hardware and heat-resistant gaskets.

W915-64A
24mm Elbow Drain

Condensation drain for installation directly off of the heater.



W002-172NUT-90
24mm 90 Degree Thru Hull

Thru hull with 90 degree elbow attached for tight installations. Includes heat-resistant gaskets.

W005-103
24mm Water Drain

In-line exhaust condensation drain (Tee).



W002-1723
24mm triple wall Thru Hull

Triple wall thru hull for wood and cored hull installations. Includes heat-resistant gaskets.

W002-739
24mm Exhaust Muffler

In-line muffler to quiet combustion noise from the heater.



W903-94A
24mm Flexible Exhaust

Stainless steel flexible exhaust available to be cut to length.

W913-83B
22/24mm Exhaust Clamp

Stainless steel high temperature exhaust clamp.



W002-744-24
W002-744-24-SHORT
24mm Stainless Steel Exhaust Water Box
 Mounts to thru-hull (inside the boat) to discourage water entry into exhaust. The canister is 4" in diameter and is available either 4" (short) or 6" tall. Comes with exhaust blanket.

30mm Exhaust

Fittings Also Available

www.suremarineservice.com/30mm-exhaust.aspx

Exhaust (1-1/2")

1 1/2" Exhaust

The Webasto Thermo 90S, DBW 2010, DBW 2015, and the Proheat X45 all use 1 1/2" rigid stainless steel exhaust. Prefabricated pieces are available and SMS can custom bend your exhaust to meet your installation needs. All 1 1/2" exhaust parts are 316 stainless steel.



W002-109
1 1/2" Thru Hull

Horizontal outlet thru hull. Includes heat-resistant gaskets.

W001-214
1 1/2" Rigid Exhaust Tube

Sold in lengths up to 10'. All 1 1/2" pipe can be belled and bent to meet custom specifications.



W002-109-30
1 1/2" Angled Thru Hull

Includes hardware and heat-resistant gaskets.

W005-118
1 1/2" Short 90

Short radius 90 degree bend for tight installations. Belled on one end.



W002-1093
1 1/2" Triple Wall Thru Hull

Horizontal outlet thru hull for wood or wood-core hulls. Includes heat-resistant gaskets.

W005-117
1 1/2" Long 90

Prefabricated 90 degree bend. Belled on one end for easy installation.



W005-154
1 1/2" Thru Bulkhead

Protective fitting for the passage of exhaust through wood or wood-core bulkheads.

W005-113
1 1/2" 45 Degree Elbow

Prefabricated 45 degree elbow. Belled on one end.



W002-109L
1 1/2" Thru Hull w/ 90 Degree Elbow

Horizontal outlet thru hull with 90 degree elbow for tight installations.. Includes heat-resistant gaskets.

W002-1093L
1 1/2" Triple Wall Thru Hull w/ 90 Degree Elbow

Horizontal outlet thru hull for wood or wood-core hulls with 90 degree elbow for tight installations.. Includes heat-resistant gaskets.



Exhaust (1-1/2")

1 1/2" Exhaust



W005-110
1 1/2" Long 90 w/ Drain

Prefabricated 90 degree elbow with condensation drain.

W002-742
1 1/2" Muffler

In-line muffler to quiet combustion noise from the heater.



W005-111
1 1/2" Short 90 w/ Drain

Short radius 90 degree bend with condensation drain. Belled on one end.

W002-780
1 1/2" Exhaust Clamp

High temperature clamp for joining exhaust pieces.



W005-119
1 1/2" 180 degree drain

Low point drain for condensation.


77651
1 1/2" Exhaust Plug

To protect heater from water intrusion *when heater is not running.*



W002-744
1 1/2" Stainless Steel Exhaust Water Box


Mounts to thru-hull (inside the boat) to discourage water entry into exhaust. Comes with exhaust blanket.

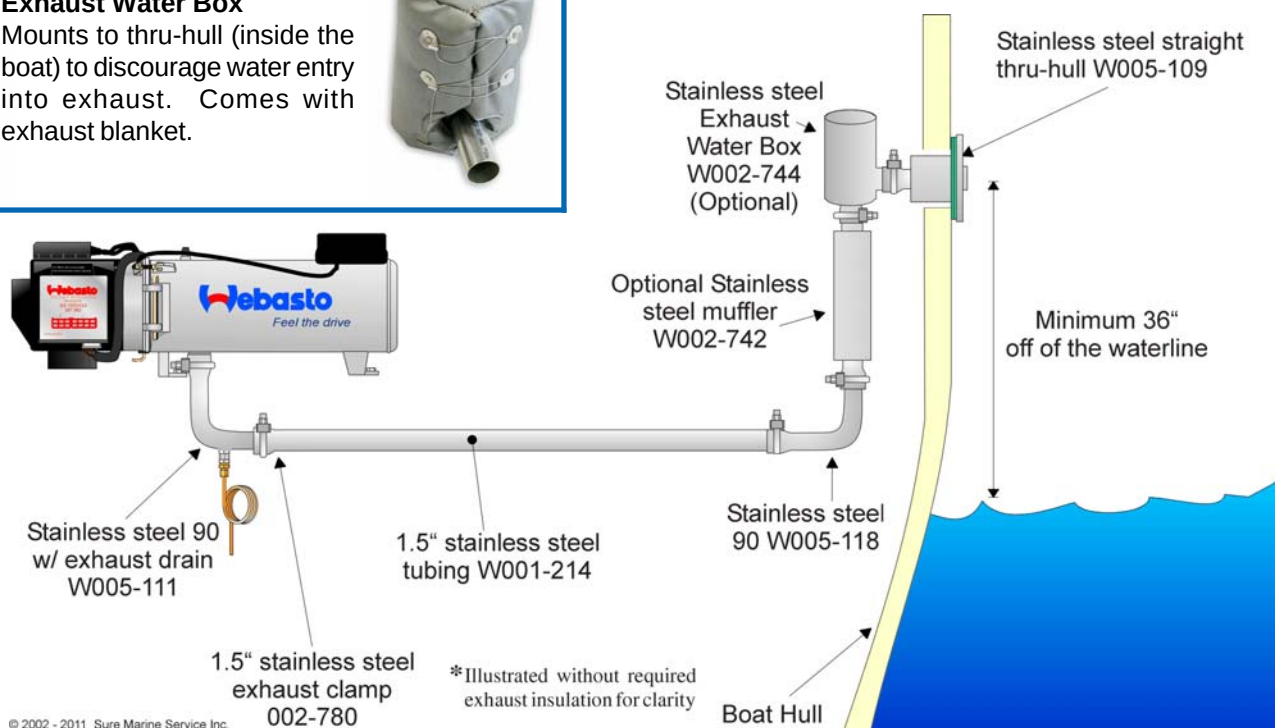


Exhaust (2-3/4")

2 3/4" Exhaust

The Webasto DBW 2020/300 Olympia OL-60 and the Olympia OL-105 use 2 3/4" rigid exhaust systems. Prefabricated pieces are available for installation. All 2 3/4" exhaust pieces are 316 stainless steel. Four and five inch exhaust systems are also available if your particular installation requires it.

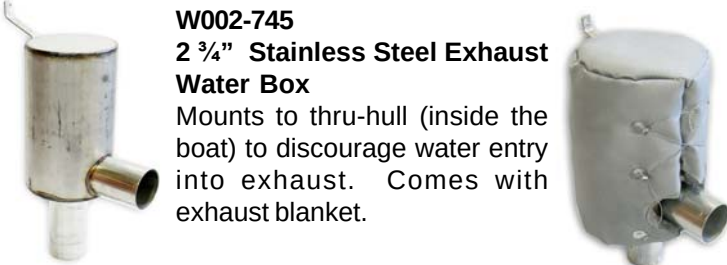
		Description	
		W13-275S 2 3/4" 45 Degree Elbow	
		Prefabricated 45 degree bend. Belled on one end.	
		W002-130 2 3/4" Short 90 w/ Drain	
		Short radius 90 degree bend with condensation drain. Belled on one end.	
		W002-133 2 3/4" Long 90 w/ Drain	
		Long radius 90 degree bend with condensation drain. Belled on one end.	
		W002-743 2 3/4" Muffler	
		In-line muffler to quiet combustion noise from heater.	
		W002-663 2 3/4" Exhaust Clamp	
		High-temperature clamp for joining exhaust pieces.	
		W002-745 2 3/4" Stainless Steel Exhaust Water Box	
		Mounts to thru-hull (inside the boat) to discourage water entry into exhaust. Comes with exhaust blanket.	
	W002-124 2 3/4" Thru Hull	Horizontal outlet exhaust thru hull. Includes heat-resistant gaskets.	
	W002-124L 2 3/4" Thru Hull w/ 90 Degree Elbow	Horizontal outlet exhaust thru hull with 90 degree bend. Includes heat-resistant gaskets.	
	W002-1243 2 3/4" Triple Wall Thru Hull	Horizontal outlet thru hull with triple-wall protection for wood or wood-core boats.	
	W002-131 2 3/4" Long 90	Prefabricated 90 degree bend. Belled on one end.	
	W11-275SB 2 3/4" Short 90	Short-radius 90 degree bend. Belled on one end.	

Exhaust Equipment

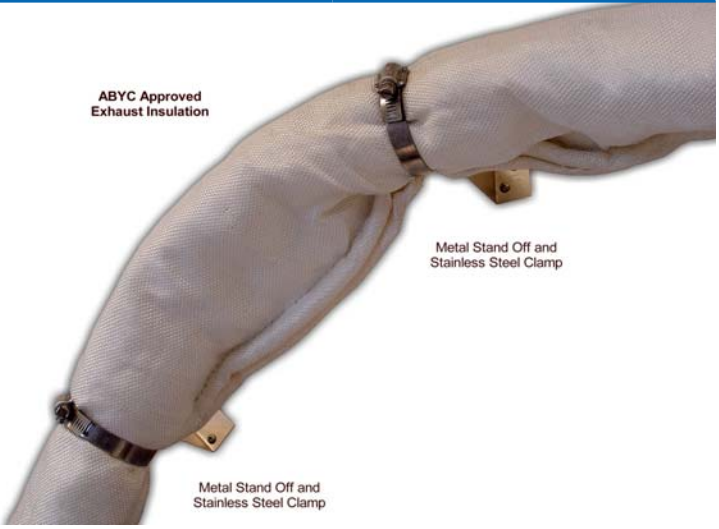	Description	Description	
	W001-441B 1 1/2" Exhaust Blanket. Available in 1, 2, 3, 4 and 5 foot sections. Black Silicone Cover hides dirt and is easy to clean.	W001-887 Long 90 2 3/4" Exhaust Blanket Blanket piece cut to fit the 2 3/4" long 90 elbow.	
	W001-883LB Long 90 1 1/2" Exhaust Blanket. Blanket piece cut to fit the 1 1/2" long 90 elbow.	W001-884 Short 90 2 3/4" Exhaust Blanket Blanket piece cut to fit the 2 3/4" short radius 90 degree elbow.	
	W001-883SB Short 90 1 1/2" Exhaust Blanket Blanket piece cut to fit the 1 1/2" short radius 90 degree elbow.	W001-886 2 3/4" Exhaust Blanket. Available in 1, 2, 3, 4 and 5 foot sections.	
	Ultra Copper High-temp gasket sealant used for thru-hulls. PERM-81878 Ultra Copper	45050 High Temp Exhaust Sealant Sealant for joints in the exhaust system. Capable for use on all systems.	
	Insulating Standoff Aluminum standoff to secure exhaust system away from hull. 001-241 5" 001-244 3"	 ABYC Approved Exhaust Insulation Metal Stand Off and Stainless Steel Clamp Metal Stand Off and Stainless Steel Clamp	

Fuel Tanks

Your heating system may not be able to use the same fuel source as your engines. You may have gasoline powered engines or installation restrictions might not allow for sufficient main fuel tank access. Whatever the reason, SMS offers three tanks for your heater installation.

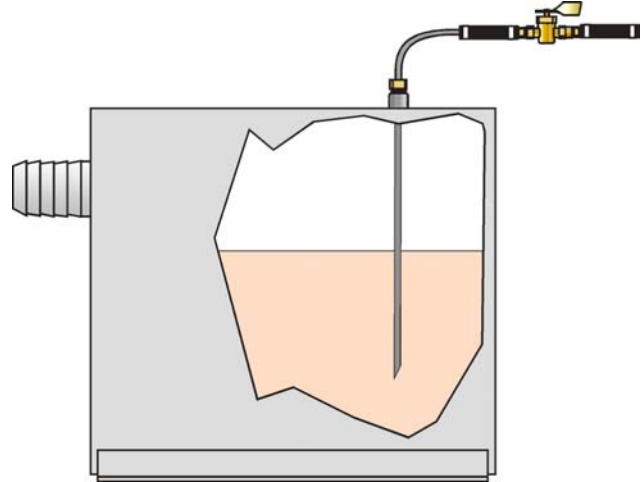

002-649 2 Gallon Aluminum Fuel Tank

Constructed of aluminum, Includes a 1-1/4" FNPT fill port, 5/8" barb vent fitting, and removable blank plate for optional electric gauge sender installation. Fuel feed is off the bottom.

Measurements:

L 13" x W 3 1/4" x H 13"

*not including 2" hose barb



002-712 3 Gallon Bulkhead Mount Aluminum Fuel Tank

Constructed of aluminum, this tank includes a 1-1/2" fill hose connection, a 5/8" vent and a 3/16" Stainless pick up tube with a 1/8" Female NPT elbow outlet and removable blank plate for optional electric gauge sender installation.

Measurements:

L 10 1/4"* x W 8 1/2" x H 10 1/4"

*not including 2" long hose barb



002-705 6 Gallon Aluminum Fuel Tank

Constructed of aluminum, this tank includes a 1-1/2" fill hose connection, a 5/8" vent and a 3/16" Stainless pick up tube with a 1/8" Female NPT elbow outle and removable blank plate for optional electric gauge sender installation..

Measurements:

L 13 1/4"* x W 8" x H 13 9/16"

*not including 2" hose barb



Fuel Pickup Tubes



W005-912 SMS 3/16" Fuel Pickup Tube

A 3/16" stainless steel fuel pickup with a 1/8" NPT male fitting for the tank and a 1/8" FNPT fitting for a hose barb or compression fitting.

W005-913 SMS 1/4" Fuel Pickup Tube

A 1/4" fuel pickup tube that can also be used as a combination supply and return. This tube has 1/4" NPT threaded fitting and a 1/4" FNPT fitting for a hose connection.



SS-WTB SMS Weldless Tank Bushing



Stainless steel fuel pick-up tube installation kit for tanks that do not have bushings welded into them. By drilling a 1" hole in the top of the tank you can adapt to 1/4" Female NPT. You do not need access to the inside of the tank to install this bushing. It can be installed "blind"!

Kit comes complete with Stainless tank bushing, nitrile centering o-ring, nitrile sealing gasket, stainless washer and nut.



W903-200 3/16" Fuel Siphon Tube

The 3/16" fuel siphon kit includes one 3/16" stainless steel siphon tube, 1/4" NPT brass compression fitting, brass lock nut and mount and gasket. The end of the tube is knurled for hose barb connection.

W903-210 1/4" Fuel Supply and Return Tube

The supply/return tube kit includes a 1/4" siphon tube, a 1/4" brass return hose barb, 1/4" NPT brass threaded fitting, brass lock ring and retention nut and gasket. The end of the siphon tube is knurled for hose connection.



Fuel Hose & Copper Tube

Installation requirements for heaters demand that a fuel system must consist of copper tube or USCG Type A fuel hose. Each individual heater may also have more specific demands for installation, but most heaters can use either copper tube, fuel hose or a combination of each. SMS carries a full selection of copper tube and fuel hose for all heaters.




Rubber Fuel Hose

001-449	1/4"	USCG Type A
FT516	5/16"	USCG Type A
FT38	3/8"	USCG Type A
001-903	1-1/2"	Type A (Fill Hose)
FT58	5/8"	Type A2 (Vent Hose)



Copper Tube

001-010	3/16" Copper Tube
001-011	1/4" Copper Tube
001-182	5/16" Copper Tube
001-183	1/2" Copper Tube

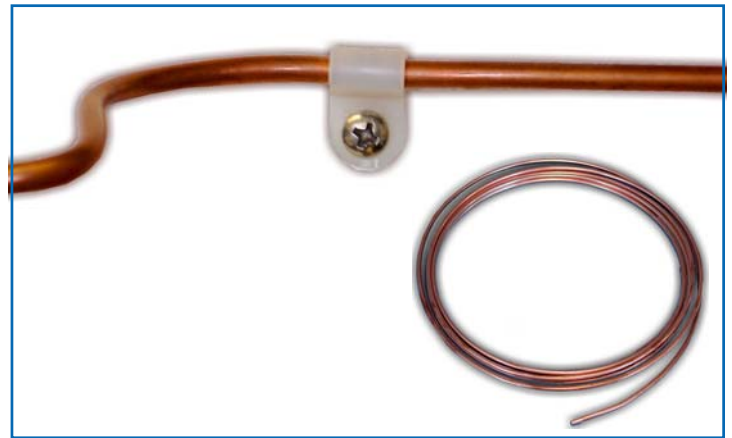

Stainless Steel Fuel Clamp

To prevent damage to the fuel hose, band-type stainless steel clamps are advised. Clamps come in all sizes needed to fit the outside diameter of the fuel hose.



Page 63



© 2020 Sure Marine Service, All Rights Reserved.

The content of this catalog is furnished for informational use only. It is subject to change without notice. Sure Marine Service assumes no responsibility or liability for any errors or inaccuracies that may appear in the content of this catalog.

No part of this document may be reproduced in any form including photostat, microfilm, xerography, or incorporated into any information retrieval system, electronic or mechanical, without the express written permission of the copyright owner.

The text, drawings and other artwork are not to scale and are simply intended to be guides to aid in your selection process. They do not replace installation or owners manuals.

Sure Marine Service, Inc.
5320 28th Ave. N.W.
Seattle, WA 98107
(800) 562-7797 (206) 784-9903

www.SureMarineService.com