



TYPICAL GROUND & UPPER FLOORS PLAN

- G 28 half round ridge cap
- G28 preapainted profile sheets
- 100 x 50 mm wall plate
- 100 x 50 mm tie beam
- 100 x 50 mm struts and ties
- 150 x 50 mm rafters
- 75 x 50 mm purlins
- 225 x 20 mm wrot fascia board

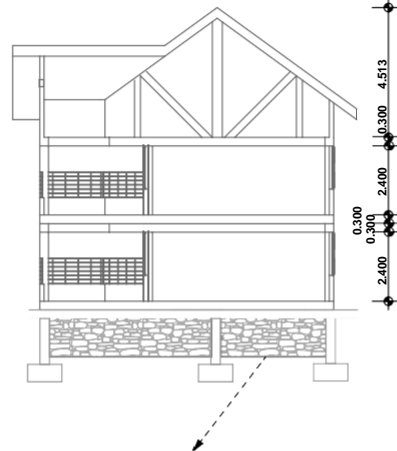


- 25mm cement screed floor finish
- 150mm floor slab
- 50mm murrum blinding
- 300mm approved hardcore filling
- 600mmx200mm Ordinary foundation footing


SECTION 01-01



SECTION H-H

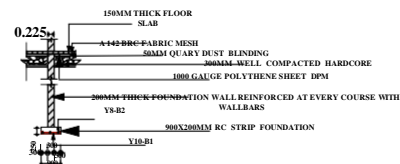

foundation footing section details.

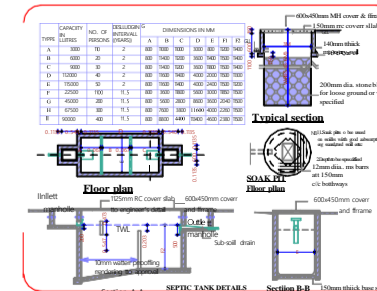

SEPTIC TANK DETAILS

GENERAL NOTES

- All dimensions are in mm unless otherwise specified.
- Dimensions to be read not scaled, only figured dimensions to be used.
- Contractor to check and verify all dimensions on site before commencement of any works.
- Any discrepancy must be reported to the Project Architect.

CONSTRUCTION

- All black cotton soil to be removed from below all building and paved surfaces.
- All soil under slabs and all around external foundations to be treated against termites.
- Building to be clear of black cotton soil within 3m outside the perimeter wall.
- Depth of foundation to be determined on the site to structural Engineer's Approval.

Client

SANYA CHILDREN'S HOME

Consultants

DANTECH BUILDING CONSULTANTS GUCHA P.O BOX 443 KISII

Title

Floor plan
Elevations
Roof plan
Section &
Site plan

Date

Scale: