



Lit, Therefore Compliant

Energy-Warden Self-Assessment Against Metered Overnight Power Draw

Joost Nwosu · Renke Sabel — School of Continuous Improvement

Background

Every fortnight, an energy warden rates their floor “on target” or not, mostly from a corridor walkthrough. Facilities has never checked what that rating tracks against the floor’s own smart meter.

Aims


- Compare self-assessed compliance against metered overnight power draw
- Test whether the shared photocopier’s stand-by state predicts either rating
- Identify what a “compliant” walkthrough is actually rating

Methods

- 22 floors · fortnightly walkthroughs · 14 rounds · Feb–Aug 2026
- Independent overnight kWh metering against each floor’s set target
- Photocopier stand-by state logged at each round, blind to meter data

Results

Self-assessed compliance stayed high and stable throughout; metered compliance moved largely independently of it, tracking instead whether the shared photocopier’s light was seen lit.

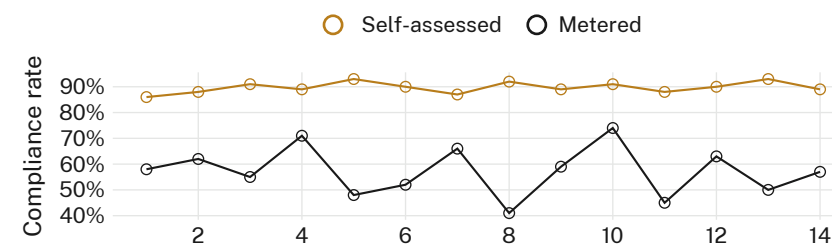

Self-assessed compliance held above 86% in every one of 14 fortnightly rounds between February and August 2026 (n = 22 floors); metered compliance ranged from 41% to 74% over the same period, correlating with the self-assessed rating at $r = 0.14$.

Discussion & conclusions

The self-assessment appears to rate the photocopier, not the floor. A visible stand-by light reads as evidence of restraint; the meter behind it disagrees more often than not. Next: extend metering to the wider walkthrough checklist the light currently stands in for.

References

1. de Wilde, P. (2014). The gap between predicted and measured energy performance of buildings: A framework for investigation. *Automation in Construction*, 41, 40–49. doi:10.1016/j.autcon.2014.02.009
2. Newsham, G. R., Mancini, S., & Birt, B. J. (2009). Do LEED-certified buildings save energy? Yes, but... *Energy and Buildings*, 41(8), 897–905. doi:10.1016/j.enbuild.2009.03.014
3. Scofield, J. H. (2009). Do LEED-certified buildings save energy? Not really... *Energy and Buildings*, 41(12), 1386–1390. doi:10.1016/j.enbuild.2009.08.006
4. van Dronkelaar, C., Dowson, M., Spataru, C., & Mumovic, D. (2016). A review of the regulatory energy performance gap and its underlying causes in non-domestic buildings. *Frontiers in Mechanical Engineering*, 1, 17. doi:10.3389/fmech.2015.00017
5. Delzendeh, E., Wu, S., Lee, A., & Zhou, Y. (2017). The impact of occupants’ behaviours on building energy analysis: A research review. *Renewable and Sustainable Energy Reviews*, 80, 1061–1071. doi:10.1016/j.rser.2017.05.264
6. Karjalainen, S. (2011). Consumer preferences for feedback on household electricity consumption. *Energy and Buildings*, 43(2–3), 458–467. doi:10.1016/j.enbuild.2010.10.010

Photocopier make and model withheld; no walkthrough times attributed to individual wardens.

Office of Research Outputs · slovenian.university · doi:10.5555/slovenian.vdmpr1



“The light was on. The meter disagreed.”

22 floors · 14 fortnightly rounds · one instrument