pytheas Documentation

Release 1.1.1

Benjamin Vial

Dec 02, 2019

Contents

Introduction

Pytheas is a Python package for creating, running and postprocessing electrodynamic simulations. It is based on open source software Gmsh for creating geometries and mesh generation, and GetDP for solving the underlying partial differential equations with the finite element method.

It features built in models of:

- periodic media in 2D and 3D with computation of diffraction efficiencies
- scattering analysis in 2D and 3D
- Bloch mode analysis of metamaterials
- treatment of open geometries with perfectly matched layers
- tools to define arbitrary permittivity distributions
- quasi-normal mode analysis
- two scale convergence homogenization
- tools for topology optimization in 2D
- built-in refractive index database

Installation

The easiest way to get started is to install via PyPi:

```
pip install pytheas-pip
```

User guide

3.1 pytheas.periodic2D: 2D metamaterials

The *pytheas.periodic2D* module implements the resolution of the scalar wave equation for TE and TM polarization for mono-periodic stuctures in 2D:

- subject to an incident plane wave (diffraction problem) with calculation of the diffraction efficiencies, absorption and energy balance.

- eigenvalues and eigenmodes (modal analysis)

3.1.1 Classes

Periodic2D([analysis, pola, A, lambda0, ...])	A class for a finite element model of a 2D mono-periodic medium.

pytheas.Periodic2D

class pytheas.**Periodic2D**(*analysis='direct', pola='TE', A=1, lambda0=1, lambda_mesh=1, theta_deg=0, d=0.8, h_sup=1, h_sub=1, h_layer1=0.1, h_layer2=0.1, h_des=1.0, h_pmltop=1.0, h_pmlbot=1.0, a_pml=1, b_pml=1, eps_sup=(1+0j), eps_sub=(1+0j), eps_layer1=(1+0j), eps_layer2=(1+0j), eps_des=(1+0j), eps_incl=(1+0j), mu_incl=(1+0j), mu_des=(1+0j)*)
A class for a finite element model of a 2D mono-periodic medium.

The model consist of a single unit cell with quasi-periodic boundary conditions in the *x* direction enclosed with perfectly matched layers (PMLs) in the *y* direction to truncate the semi infinite media. From top to bottom:

- PML top

- superstrate (incident medium)

- layer 2

- design layer: this is the layer containing the periodic pattern, can be continuous or discrete

- layer 1

- substrate

- PML bottom

Parameters

- **analysis** (*str, default "direct"*) – Analysis type: either "direct" (plane wave) or "modal" (spectral problem)

- **pola** (*str, default "TE"*) – Polarization case: either "TE" (E along z) or "TM" (H along z)

- **A** (*float, default 1*) – Incident plane wave amplitude

- **lambda0** (*float, default 1*) – Incident plane wave wavelength in free space

- **lambda_mesh** (*float, default 1*) – Wavelength to use for meshing

- **theta_deg** (*float, default 0*) – Incident plane wave angle (in degrees). Light comes from the top (travels along -y if normal incidence, theta_deg=0 is set)

- **d** (*float, default 0.8*) – Periodicity

- **h_sup** (*float, default 1*) – Thickness superstrate

- **h_sub** (*float, default 1*) – Thickness substrate

- **h_layer1** (*float, default 0.1*) – Thickness layer 1

- **h_layer2** (*float, default 0.1*) – Thickness layer 2

- **h_des** (*float, default 1*) – Thickness layer design

- **h_pmltop** (*float, default 1*) – Thickness pml top

- **h_pmlbot** (*float, default 1*) – Thickness pml bot

- **a_pml** (*float, default 1*) – PMLs complex y-stretching parameter, real part

- **b_pml** (*float, default 1*) – PMLs complex y-stretching parameter, imaginary part

- **eps_sup** (*complex, default (1 - 0 * 1j)*) – Permittivity superstrate

- **eps_sub** (*complex, default (1 - 0 * 1j)*) – Permittivity substrate

- **eps_layer1** (*complex, default (1 - 0 * 1j)*) – Permittivity layer 1

- **eps_layer2** (*complex, default (1 - 0 * 1j)*) – Permittivity layer 2

- **eps_des** (*complex, default (1 - 0 * 1j)*) – Permittivity layer design

- **eps_incl** (*complex, default (1 - 0 * 1j)*) – Permittivity inclusion

cleanup()
    Remove gmsh/getdp/python generated files from the temporary folder

compute_solution()
    Compute the solution of the FEM problem using getdp

diffraction_efficiencies(*cplx_effs=False, orders=False*)
    Postprocess diffraction efficiencies.

        Parameters

- **cplx_effs** (*bool*) – If *True*, return complex coefficients (amplitude reflection and transmission). If *False*, return real coefficients (power reflection and transmission)

- **orders** (*bool*) – If *True*, computes the transmission and reflection for all the propagating diffraction orders. If *False*, returns the sum of all the propagating diffraction orders.

> **Returns** A dictionary containing the diffraction efficiencies.
>
> **Return type** dict

get_field_map(*name*)
    Retrieve a field map.

> **Parameters name** (*str*) – Choose between "u" (scattered field), "u_tot" (total field)
>
> **Returns** A 2D complex array of shape (*Nix*, *Niy*)
>
> **Return type** array

initialize()
    Initialize the problem parameters.

make_inclusion(*points*, *lcar='lc_incl'*, ***kwargs*)
    Make a diffractive element geometry from points.

> **Parameters**
>
> - **points** (*array of size (Npoints, 2)*) – The points defining the simply connected 2D geometry of the object.
> - **lcar** (*str (default "lc_incl")*) – Caracteristic length for the mesh.
> - ****kwargs** (*dict*) – Extra arguments.

make_mesh(*other_option=None*)
    Mesh the geometry using gmsh.

> **Parameters other_option** (*str*) – Extra flag to pass to gmsh.
>
> **Returns** The content of the .msh file.
>
> **Return type** str

mk_tmp_dir()
    Create a temporary directory

open_gmsh_gui(*pos_list=None*)
    Open gmsh GUI to visualize geometry and postprocessing results.

> **Parameters pos_list** (*list*) – A list of .pos files giving the views to load. By default it will render all the generated views.

postpro_absorption()
    Compute the absorption coefficient

> **Returns Q** – Absorption coefficient
>
> **Return type** float

postpro_fields(*filetype='txt'*, *postop='postop_fields'*)
    Compute the field maps and output to a file.

> **Parameters**

- **filetype** (*str, default "txt"*) – Type of output files. Either "txt" (to be read by the method get_field_map in python) or "pos" to be read by gmsh/getdp.
- **postop** (*str, default "postop_fields"*) – Name of the postoperation

postprocess(*postop*)
  Run getdp postoperation.

  Parameters postop (*str*) – Name of the postoperation to run.

rm_tmp_dir()
  Remove the temporary directory

update_params()
  Update the dictionary of parameters and the corresponding file

Examples using `pytheas.Periodic2D`

- *Simulating diffraction by a 2D metamaterial*

3.2 `pytheas.scatt2D`: 2D scattering

The *pytheas.scatt2D* module implements the resolution of the scalar wave equation for TE and TM polarization in 2D:

- subject to an incident plane wave or line source (diffraction problem)
- eigenvalues and eigenmodes (modal analysis)

3.2.1 Classes

Scatt2D()	A class for a finite element model of a 2D medium

pytheas.Scatt2D

class pytheas.**Scatt2D**
  A class for a finite element model of a 2D medium

  A = None
    incident plane wave amplitude

    Type flt

  Ni_theta = None
    number of theta points for computing the angular dependance of the modal coupling coefficients

    Type int

  Nibox_x = None
    number of x interpolation points on the design box

    Type int

Nibox_y = None
number of y interpolation points on the design box

>> **Type** int

Nin2f_x = None
number of x interpolation points for near to far field calculations

>> **Type** int

Nin2f_y = None
number of y interpolation points for near to far field calculations

>> **Type** int

Nix = None
number of x points for postprocessing field maps

>> **Type** int

a_pml = None
PMLs parameter, real part

>> **Type** flt

analysis = None
analysys type (either "direct" or "modal")

>> **Type** str

b_pml = None
PMLs parameter, imaginary part

>> **Type** flt

beam_flag = None
beam?

cleanup()
Remove gmsh/getdp/python generated files from the temporary folder

compute_solution(*res_list=None*)
Compute the solution of the FEM problem using getdp

dom_des = None
design domain number (check .geo/.pro files)

eps_des = None
permittivity scattering box

>> **Type** flt

eps_host = None
permittivity host

>> **Type** flt

eps_incl = None
permittivity inclusion

>> **Type** flt

eps_sub = None
permittivity substrate

> **Type** flt

h_pml = None
> thickness pml
>
> > **Type** flt

hx_des = None
> x - thickness scattering box (design)
>
> > **Type** flt

hy_des = None
> y - thickness scattering box
>
> > **Type** flt

initialize()
> Initialize the problem parameters.

lambda0 = None
> incident plane wave wavelength in free space
>
> > **Type** flt

lambda0search = None
> wavelength around which to search eigenvalues
>
> > **Type** flt

lambda_mesh = None
> wavelength to use for meshing
>
> > **Type** flt

ls_flag = None
> line source position

make_inclusion(*points*, *lcar='lc_incl'*, ***kwargs*)
> Make a diffractive element geometry from points.
>
> > **Parameters**
> >
> > - **points** (*array of size (Npoints, 2)*) – The points defining the simply connected 2D geometry of the object.
> > - **lcar** (*str (default "lc_incl")*) – Caracteristic length for the mesh.
> > - ****kwargs** (*dict*) – Extra arguments.

make_mesh(*other_option=None*)
> Mesh the geometry using gmsh.
>
> > **Parameters other_option** (*str*) – Extra flag to pass to gmsh.
> >
> > **Returns** The content of the .msh file.
> >
> > **Return type** str

mk_tmp_dir()
> Create a temporary directory

nb_slice = None
> number of y slices points for postprocessing diffraction efficiencies

> **Type** int

neig = None
number of eigenvalues searched for in modal analysis

> **Type** int

open_gmsh_gui(*pos_list=None*)
Open gmsh GUI to visualize geometry and postprocessing results.

> **Parameters pos_list** (*list*) – A list of .pos files giving the views to load. By default it will render all the generated views.

pola = None
polarisation of the incident plane wave (either "TE" or "TM")

> **Type** str

postpro_fields(*filetype='txt', postop='postop_fields'*)
Compute the field maps and output to a file.

> **Parameters**
>
> - **filetype** (*str, default "txt"*) – Type of output files. Either "txt" (to be read by the method get_field_map in python) or "pos" to be read by gmsh/getdp.
> - **postop** (*str, default "postop_fields"*) – Name of the postoperation

postprocess(*postop*)
Run getdp postoperation.

> **Parameters postop** (*str*) – Name of the postoperation to run.

rm_tmp_dir()
Remove the temporary directory

scan_dist_ratio = None
such that *scan_dist = min(h_sup, hsub)/scan_dist_ratio*

> **Type** flt

theta_deg = None
incident plane wave angle (in degrees). Light comes from the top (travels along -y if normal incidence, *theta_deg=0* is set)

> **Type** flt

update_params()
Update the dictionary of parameters and the corresponding file

xpp = None
coords of point for PostProcessing

ypp = None
coords of point for PostProcessing

Examples using pytheas.Scatt2D

- *Simulating diffraction by an object in 2D*

3.3 `pytheas.tools`: tools and utilities

Input/output and utilities.

3.3.1 Submodules

femio	Tools for gmsh/getdp control and input/output.
utils	Shared utility functions used in pytheas.

pytheas.tools.femio

Tools for gmsh/getdp control and input/output.

pytheas.tools.femio.**mesh_model**(*path_mesh*, *path_geo*, *mesh_format='msh2'*, *dim=None*, *verbose=0*, *other_option=''*)
    Mesh the model using Gmsh

pytheas.tools.femio.**postpro_commands**(*postop*, *path_pro*, *path_mesh*, *path_pos=None*, *verbose=0*)
    Generate a command list for postprocessing by GetDP (see main.pro file in ./base folder for default available postprocessings, or to add your own)

    Parameters

- **postop** (*str*) – The name of the postoperation to perform.
- **path_pro** (*str*) – Path to the .pro file
- **path_mesh** (*str*) – Path to the .msh file
- **path_pos** (*str , optional*) – Path to a file to be read by gmshread.
- **verbose** (*int*) – verbosity level
- **to None.** (*Defaults*) –

    Returns The list of strings to be oscommanded.

    Return type list

pytheas.tools.utils

Shared utility functions used in pytheas.

pytheas.tools.utils.**normalize**(*x*)
    Normalize an array between 0 and 1

    Parameters **x** (*array-like*) – the quantity to be normalized

    Returns **x_norm** – normalized array

    Return type array-like

<div align="right">

4

</div>

<div align="right">

Examples

</div>

4.1 Material examples

Examples to show how to retrieve complex refractive index from a database, generating material patterns.

4.1.1 Importing refractive index from a database

Retrieve and plot the refractive index of a material in the refractiveindex.info data.

```python
import numpy as np
from pytheas import refractiveindex as ri
import matplotlib.pyplot as plt
```

We can get the refractive index from tabulated data or a formula using the database in the `pytheas.material` module. We will import the measured data from the reference Johnson and Christy [JC1972]. We first specify the file `yamlFile` we want to import:

```python
yamlFile = "main/Au/Johnson.yml"
```

We then get the wavelength bounds from the data (in microns) and create a wavelength range to interpolate:

```python
bounds = ri.get_wl_range(yamlFile)
print(bounds[0], bounds[1])
lambdas = np.linspace(0.4, 0.8, 300)
```

Out:

```
0.1879 1.937
```

Then get the refractive index data:

```python
ncomplex = ri.get_complex_index(lambdas, yamlFile)
epsilon = ncomplex ** 2
```

And finally plot it:

```
fig, ax = plt.subplots(1, figsize=(6, 4))
ax.plot(lambdas, epsilon.real, "-", c="#ad4453", label=r"Re($\varepsilon$)")
ax.plot(lambdas, epsilon.imag, "--", c="#44ad84", label=r"Im($\varepsilon$)")
ax.set_xlabel(r"$\lambda$ ($\mu m$)")
ax.set_title("complex permittivity from " + yamlFile[5:][:-4])
ax.legend(loc=0)
plt.tight_layout()
```
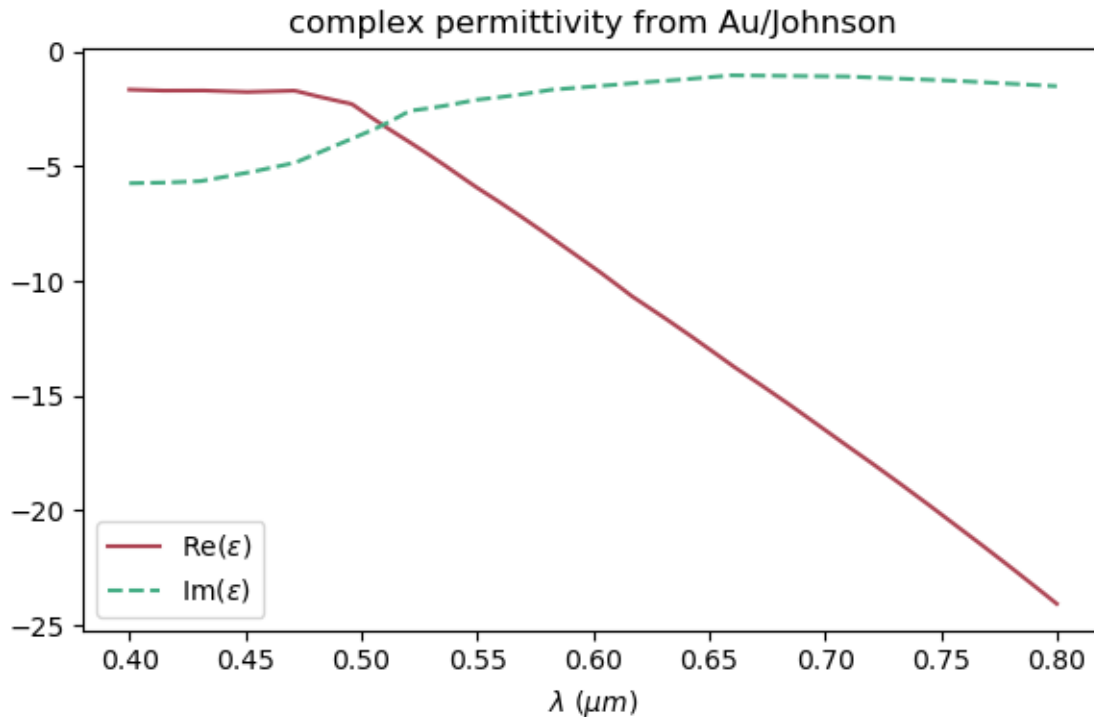

Total running time of the script: (0 minutes 0.417 seconds)

Estimated memory usage: 13 MB

4.2 Periodic 2D examples

Examples to show how to simulate a mono periodic medium (metamaterial) with the finite element method and postprocessing the results (fields maps and diffraction efficiencies).

4.2.1 Simulating diffraction by a 2D metamaterial

Finite element simulation of the diffraction of a plane wave by a mono-periodic grating and calculation of diffraction efficiencies.

First we import the required modules and class

```
import numpy as np
import matplotlib.pyplot as plt
```

(continues on next page)

```
from pytheas import genmat
from pytheas import Periodic2D
```

Then we need to instanciate the class `Periodic2D`:

```
fem = Periodic2D()
```

The model consist of a single unit cell with quasi-periodic boundary conditions in the *x* direction enclosed with perfectly matched layers (PMLs) in the *y* direction to truncate the semi infinite media. From top to bottom:

- PML top

- superstrate (incident medium)

- layer 1

- design layer: this is the layer containing the periodic pattern, can be continuous or discrete

- layer 2

- substrate

- PML bottom

We define here the opto-geometric parameters:

```
mum = 1e-6  #: flt: the scale of the problem (here micrometers)
fem.d = 0.4 * mum  #: flt: period
fem.h_sup = 1.0 * mum  #: flt: "thickness" superstrate
fem.h_sub = 1.0 * mum  #: flt: "thickness" substrate
fem.h_layer1 = 0.1 * mum  #: flt: thickness layer 1
fem.h_layer2 = 0.1 * mum  #: flt: thickness layer 2
fem.h_des = 0.4 * mum  #: flt: thickness layer design
fem.h_pmltop = 1.0 * mum  #: flt: thickness pml top
fem.h_pmlbot = 1.0 * mum  #: flt: thickness pml bot
fem.a_pml = 1  #: flt: PMLs parameter, real part
fem.b_pml = 1  #: flt: PMLs parameter, imaginary part
fem.eps_sup = 1  #: flt: permittivity superstrate
fem.eps_sub = 3  #: flt: permittivity substrate
fem.eps_layer1 = 1  #: flt: permittivity layer 1
fem.eps_layer2 = 1  #: flt: permittivity layer 2
fem.eps_des = 1  #: flt: permittivity layer design
fem.lambda0 = 0.6 * mum  #: flt: incident wavelength
fem.theta_deg = 0.0  #: flt: incident angle
fem.pola = "TE"  #: str: polarization (TE or TM)
fem.lambda_mesh = 0.6 * mum  #: flt: incident wavelength
#: mesh parameters, correspond to a mesh size of lambda_mesh/(n*parmesh),
#: where n is the refractive index of the medium
fem.parmesh_des = 15
fem.parmesh = 13
fem.parmesh_pml = fem.parmesh * 2 / 3
fem.type_des = "elements"
```

We then initialize the model (copying files, etc...) and mesh the unit cell using gmsh

```
fem.getdp_verbose = 0
fem.gmsh_verbose = 0
```

```
fem.initialize()
mesh = fem.make_mesh()
```

We use the genmat module to generate a material pattern

```
genmat.np.random.seed(100)
mat = genmat.MaterialDensity()  # instanciate
mat.n_x, mat.n_y, mat.n_z = 2 ** 7, 2 ** 7, 1  # sizes
mat.xsym = True  # symmetric with respect to x?
mat.p_seed = mat.mat_rand  # fix the pattern random seed
mat.nb_threshold = 3  # number of materials
mat._threshold_val = np.random.permutation(mat.threshold_val)
mat.pattern = mat.discrete_pattern
fig, ax = plt.subplots()
mat.plot_pattern(fig, ax)
```


material distribution
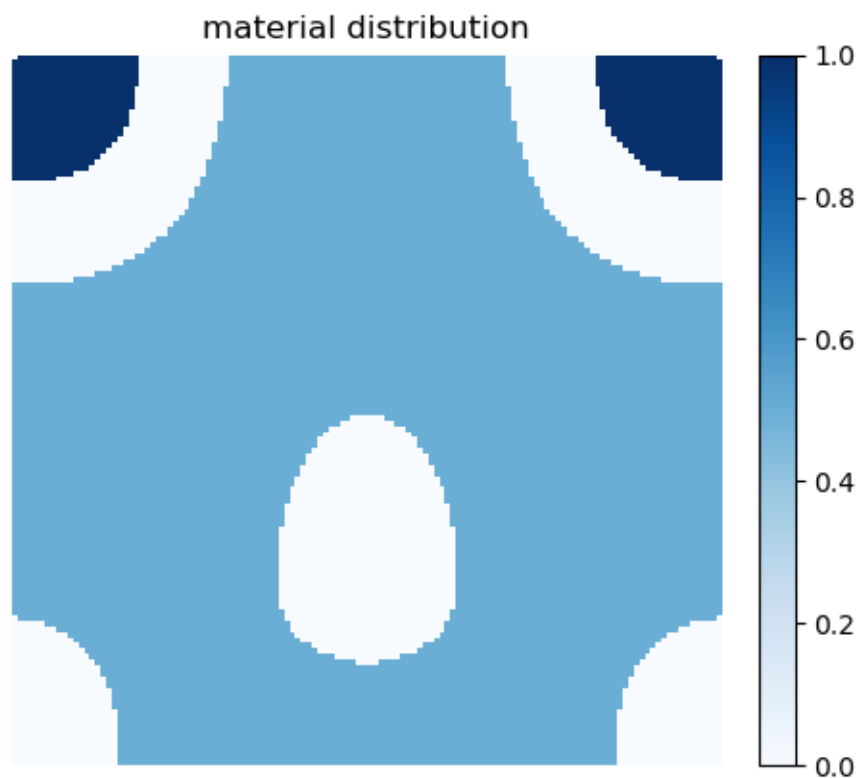
We now assign the permittivity

```
fem.register_pattern(mat.pattern, mat._threshold_val)
fem.matprop_pattern = [1.4, 4 - 0.02 * 1j, 2]  # refractive index values
```

Now we're ready to compute the solution:

```
fem.compute_solution()
```

Finally we compute the diffraction efficiencies, absorption and energy balance

```
effs_TE = fem.diffraction_efficiencies()
print("efficiencies TE", effs_TE)
```

Out:

```
efficiencies TE {'R': 0.42749531344001657, 'T': 0.45592852708133014, 'Q': 0.1177478267191832, 'B': 1.
→00117166724053}
```

It is fairly easy to switch to TM polarization:

```
fem.pola = "TM"
fem.compute_solution()
effs_TM = fem.diffraction_efficiencies()
print("efficiencies TM", effs_TM)
```

Out:

```
efficiencies TM {'R': 0.2052478291947634, 'T': 0.7359213200135426, 'Q': 0.05719724751542301, 'B': 0.
→998366396723729}
```

Total running time of the script: (0 minutes 2.643 seconds)

Estimated memory usage: 13 MB

4.3 Scattering 2D examples

Examples to show how to simulate a the 2D scattering off an object subject to a plane wave or line source harmonic excitation.

4.3.1 Simulating diffraction by an object in 2D

Finite element simulation of the diffraction by an object illuminated by a plane wave or a line source. Calculation of scattering width and getting the field maps.

```
import numpy as np
import matplotlib.pyplot as plt
from pytheas import Scatt2D

plt.ion()

pi = np.pi
```

Then we need to instanciate the class Scatt2D:

```
fem = Scatt2D()
fem.rm_tmp_dir()
```

```python
# We define first the opto-geometric parameters:

mum = 1  #: flt: the scale of the problem (here micrometers)
fem.lambda0 = 0.6 * mum  #: flt: incident wavelength
fem.pola = "TE"  #: str: polarization (TE or TM)
fem.theta_deg = 30.0  # 0: coming from top (y>0)
fem.hx_des = 1.0 * mum  #: flt: x thickness box
fem.hy_des = 1.0 * mum  #: flt: y thickness box
fem.h_pml = fem.lambda0  #: flt: thickness pml
fem.space2pml_L, fem.space2pml_R = fem.lambda0 * 2, fem.lambda0 * 2
fem.space2pml_T, fem.space2pml_B = fem.lambda0 * 2, fem.lambda0 * 2
fem.eps_des = 1  #: flt: permittivity design box
fem.eps_host = 1.0
fem.eps_incl = 11.0 - 1e-2 * 1j
#: mesh parameters, correspond to a mesh size of lambda_mesh/(n*parmesh),
#: where n is the refractive index of the medium
fem.lambda_mesh = 0.6 * mum  #: flt: incident wavelength
fem.parmesh_des = 10
fem.parmesh_incl = 10
fem.parmesh = 10
fem.parmesh_pml = fem.parmesh * 2 / 3

fem.Nix = 101
fem.Niy = 101
```

Here we define an ellipsoidal rod as the scatterer:

```python
def ellipse(Rinclx, Rincly, rot_incl, x0, y0):
    c, s = np.cos(rot_incl), np.sin(rot_incl)
    Rot = np.array([[c, -s], [s, c]])
    nt = 360
    theta = np.linspace(-pi, pi, nt)
    x = Rinclx * np.sin(theta)
    y = Rincly * np.cos(theta)
    x, y = np.linalg.linalg.dot(Rot, np.array([x, y]))
    points = x + x0, y + y0
    return points


rod = ellipse(0.4 * mum, 0.2 * mum, 0, 0, 0)
fem.inclusion_flag = True
```

Initialize, build the scatterer, mesh and compute the solution:

```python
fem.initialize()
fem.make_inclusion(rod)
fem.make_mesh()
fem.compute_solution()
```

Get the electric field and plot it:

```python
fem.postpro_fields()
u_tot = fem.get_field_map("u_tot.txt")
fig, ax = plt.subplots()
E = u_tot.real
```

```
plt.imshow(E, cmap="RdBu_r", extent=(fem.domX_L, fem.domX_R, fem.domY_B, fem.domY_T))
plt.plot(rod[0], rod[1], "w")
plt.xlabel(r"$x$ ($\rm \mu$m)")
plt.ylabel(r"$y$ ($\rm \mu$m)")
plt.title(r"Electric Field (real part) (V/m)")
plt.colorbar()
plt.tight_layout()
```
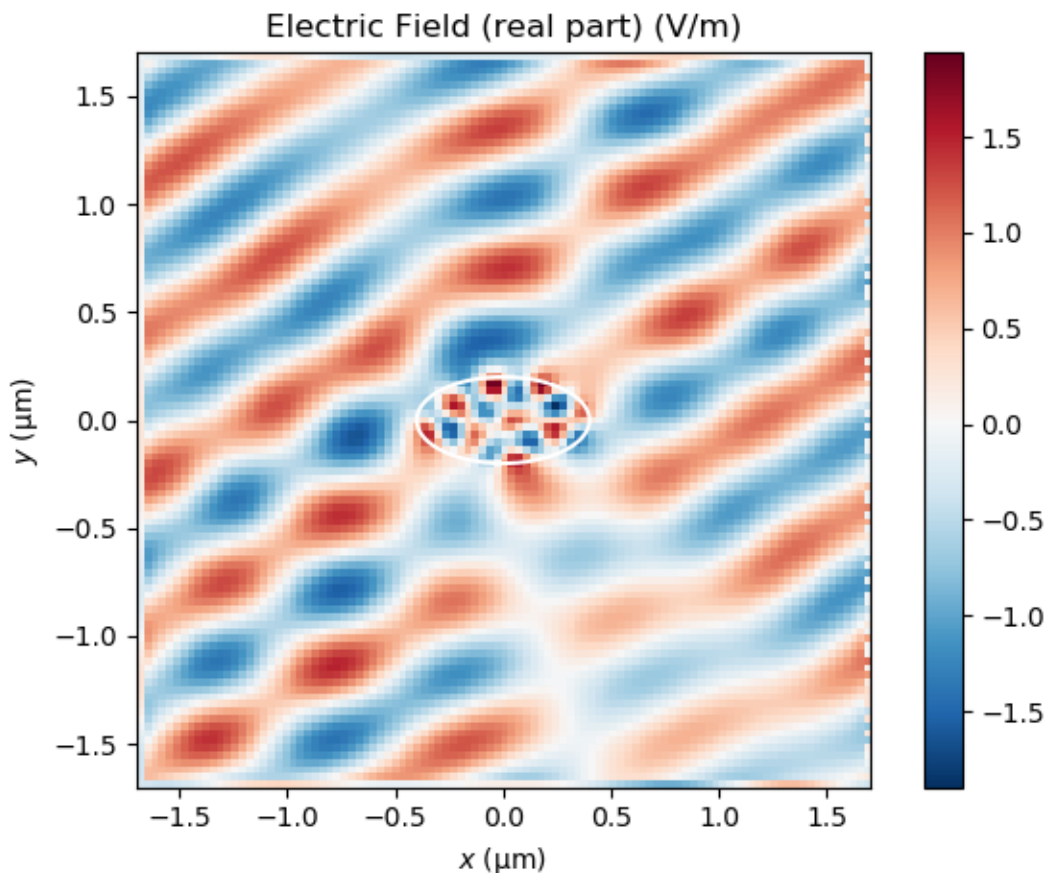

Do a near to far field transform and get the normalized scattering width:

```
ff = fem.postpro_fields_n2f()
theta = np.linspace(0, 2 * pi, 51)
scs = fem.normalized_scs(ff, theta)


fig, ax = plt.subplots()
plt.plot(theta / pi, scs, "-", c="#699545")
plt.xlabel(r"$\theta$ (rad)")
plt.ylabel(r" Normalized scattering width $\sigma/\lambda$")
ax.xaxis.set_ticks([0, 0.5, 1, 1.5, 2])
ax.xaxis.set_ticklabels(["0", "$\pi/2$", "$\pi$", "$3\pi/2$", "$2\pi$"])

scs_integ = np.trapz(scs, theta) / (2 * pi)
print("Normalized SCS", scs_integ)
```
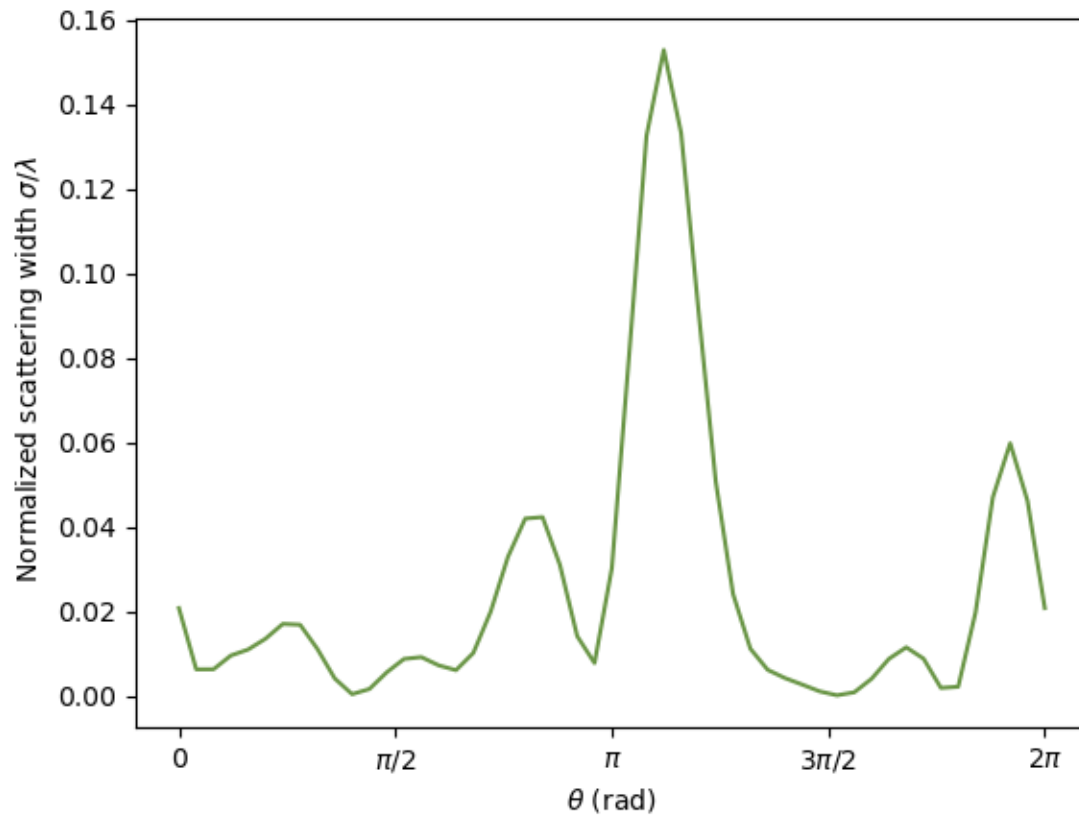
Out:

```
Normalized SCS 0.02572717419074843
```

Total running time of the script: (0 minutes 14.830 seconds)

Estimated memory usage: 16 MB

Bibliography

[JC1972] (P. B. Johnson and R. W. Christy. Optical constants of the noble metals, Phys. Rev. B 6, 4370-4379
          (1972)).

Python Module Index

p

Index