




No.:

Date: 26-JUN-2022

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

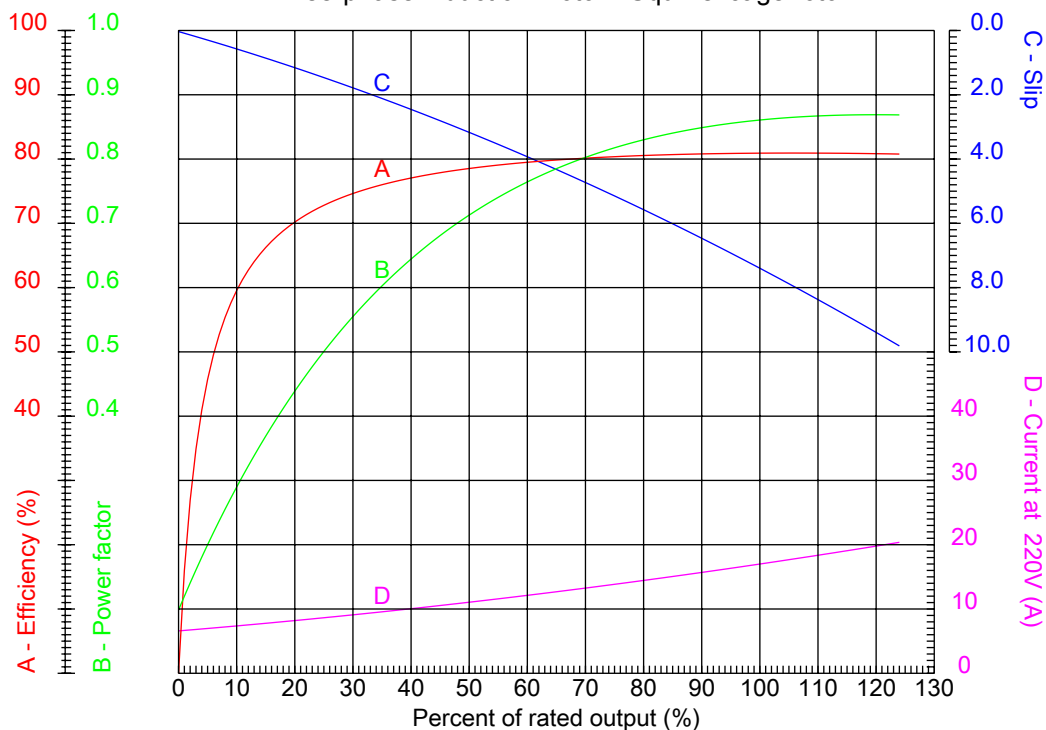

Customer :
Product line : W22 Categoria D

Frame	: 160M	Locked rotor current (I _L /I _n)	: 7.0
Output	: 4.5 kW	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 1110 rpm	Design	: D
Voltage	: 220/380/440 V	Locked rotor torque	: 340 %
Rated current	: 17.0/9.82/8.48 A	Breakdown torque	: 0 %
Insulation class	: F		

Notes:

Performed by

Checked