




No.:

Date: 26-JUN-2022

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

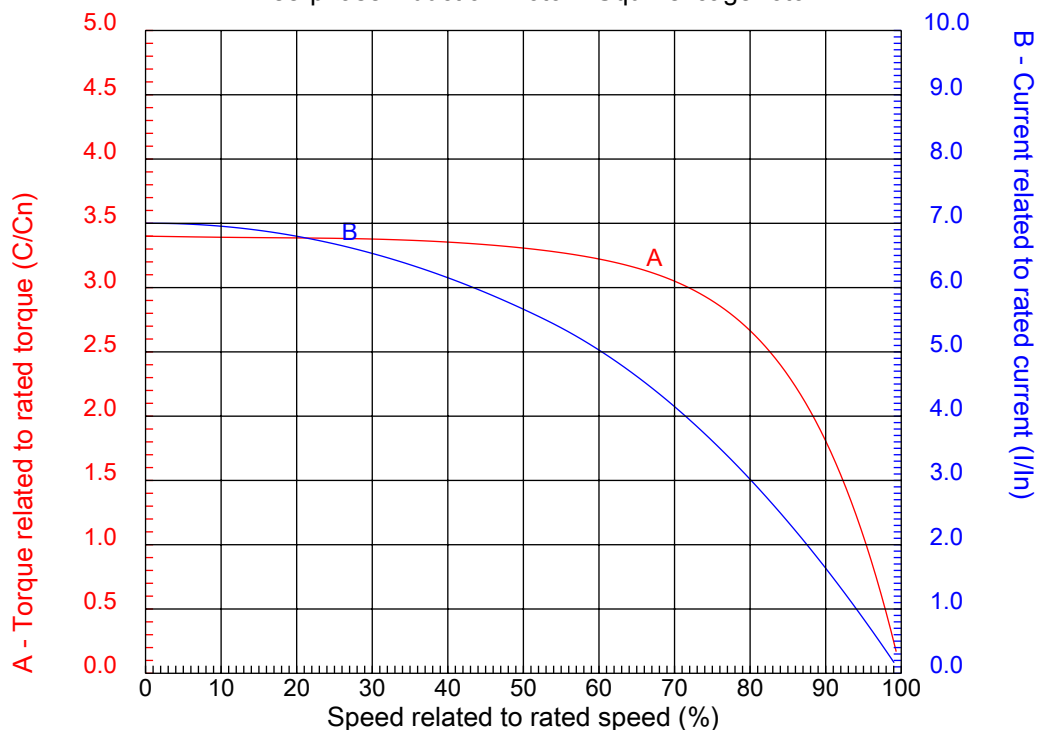

Customer :
Product line : W22 Categoria D

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 160M | Locked rotor current (I _l /I _n) | : 7.0 |
| Output | : 4.5 kW | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.00 |
| Full load speed | : 1110 rpm | Design | : D |
| Voltage | : 220/380/440 V | Locked rotor torque | : 340 % |
| Rated current | : 17.0/9.82/8.48 A | Breakdown torque | : 289 % |
| Insulation class | : F | | |

Notes:

Performed by

Checked