

Case 32: Raster-orientation covariance

ELMFIRE Verification and Validation Suite

September 2, 2026

1 Verification purpose

Case ID: CASE32_RCV. This case verifies that ELMFIRE’s raster indexing and level-set transport are covariant under a 90° rotation. It is the portable successor to Adam Laird’s `inputs-orientation` scenario.

2 Mathematical formulation and numerical implementation

For homogeneous isotropic forcing, the operator $\mathcal{L}$ in $\partial_t \phi = \mathcal{L}(\phi)$ commutes with any rigid rotation Q : $\mathcal{L}(\phi \circ Q^{-1}) = (\mathcal{L}\phi) \circ Q^{-1}$. A square north-up raster rotated by exactly 90 degrees requires no interpolation, so cell-by-cell comparison is available.

3 Derivation of expected behavior

The rotated variant is generated with `numpy.rot90` from the asymmetric L-shaped initial negative- ϕ region. Fuel, moisture, slope, and wind are spatially uniform. Therefore the rotated arrival-time validity mask and values must equal a 90-degree rotation of the original result, apart from bounded grid-level roundoff.

The reference array is generated directly from the original ELMFIRE arrival-time result by a 90-degree counterclockwise rotation, $T_{\text{ref}} = \text{rot90}(T_{\text{original}})$; no arrival values are invented. With $V = \{i : T_{\text{ref},i} \text{ and } T_{\text{rot},i} \text{ finite}\}$ and $U = \{i : \text{either value is finite}\}$, finite-mask agreement is

$$A_m = \frac{|V|}{|U|},$$

whose exact rotational reference is 1 and whose substituted test is $A_m \geq 0.99$. On the mutual finite mask, the value metric is

$$E_T = \frac{|V|^{-1} \sum_{i \in V} |T_{\text{ref},i} - T_{\text{rot},i}|}{\max[P_{90}(T_{\text{ref},i} : i \in V), 1 \text{ s}]},$$

with exact reference zero and acceptance substitution $E_T \leq 0.02$. The asymmetric generated ignition mask makes this comparison sensitive to an erroneous reflection or transposition.

4 Verification metrics and acceptance criteria

Finite-mask intersection over union must be at least 0.99. On mutually finite cells, normalized mean absolute arrival-time error must be at most 0.02. Mask agreement detects row/column reversal and georeferencing errors; value error detects orientation-dependent numerical evolution.

5 Simulation configuration and predicted outcome

Both variants use a 2000 m square domain at 5 m, Fuel Model 10, flat terrain, zero wind, and identical timing. The only changed scientific input is the exact raster rotation of `phi.tif`. The second result is predicted to be the corresponding rotation of the first.

Parameter	Configured value	Units	Role
Domain/grid	2000 m square; 5	m/cell	Exact square raster rotation
Fuel/forcing	FM10; flat; calm	—	Isotropic homogeneous operator
Time control	step 1, maximum 5; stop 7200	s	Common exact comparison time
Initial field	asymmetric L shape	—	Makes orientation errors observable
Variant transform	90-degree rotation	degrees	Exact no-interpolation covariance test

Figure 1 is generated mechanically from the prepared case-local GeoTIFF inputs. It identifies the selected source artifact and representative variant; the left panel shows a fuel, terrain, moisture, wind, canopy, or other controlling field selected for this experiment, and the right panel shows the cells selected by the non-positive initial level-set field. No values in this figure are redrawn or inferred from the expected response.

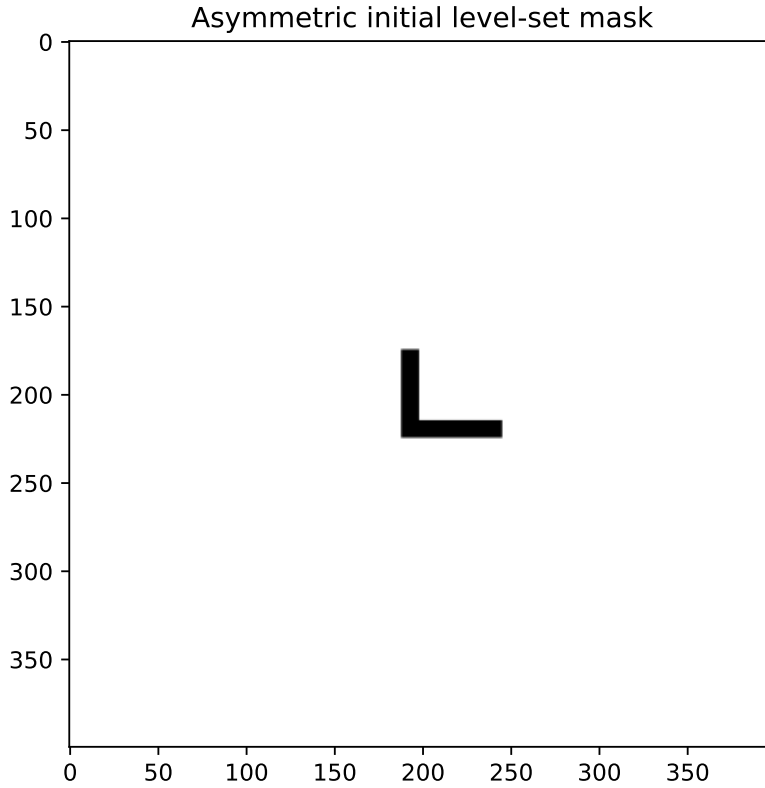


Figure 1: Prepared input conditions from case-local generated rasters. Coordinates are in metres; the colorbar identifies the displayed field and its physical units or category. The ignition panel is derived directly from $\phi \leq 0$.

6 Actual simulation results

The generated status is **PASS**; 2 of 2 metrics pass across 2 variants. Missing output produces NOT EVALUABLE.

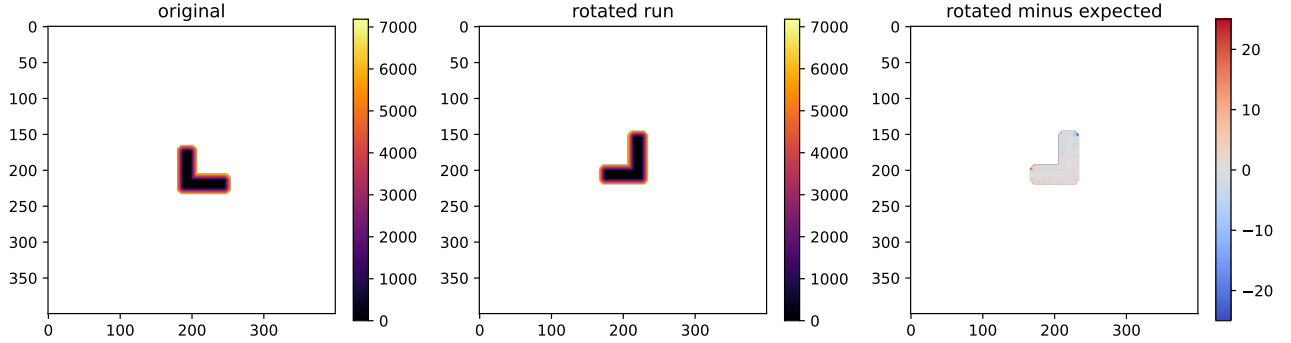


Figure 2: Original, independently rotated, and difference arrival-time fields.

7 Calculated metrics and verification decision

Metric	Expected	Calculated	Status
rotated finite-mask agreement	$\hat{\epsilon} = 0.99$ (1% disagreement)	1 fraction	PASS
rotated arrival-time error	$\hat{\epsilon} = 0.02$ (2%)	0.000214081 normalized L1	PASS

The authoritative decision is **PASS** from `outputs/metrics.json`.

8 Technical interpretation

Mask disagreement indicates inconsistent raster orientation, bounds, or row/column indexing. Value disagreement with matching masks indicates a directional bias in transport or output serialization.

9 Scope and limitations

The 90-degree test avoids resampling and therefore does not assess arbitrary-angle reprojection. It verifies executable behavior, not the internal bilinear-interpolation routine in isolation.