IEEE-488 Interfaces for the PC

Model	KPCI-488	KPC-488.2	KPC-488.2AT	KPCMCIA-GPIB95	KPCMCIA-GPIBNT
Page	274	278	278	276	276
Description	IEEE-488.2 Interface	IEEE-488.2 Interface	IEEE-488.2 Interface	IEEE-488.2 Interface	IEEE-488.2 Interface
Bus	PCI	ISA	ISA		
Data Transfer Rate	1.5MByte/s	350kByte/s	1.5MByte/s	>1MByte/s	>1MByte/s
No. of Instruments Controlled	14	NA	NA		
Max. Distance	20m	20m	20m	20m	20m
FIFO	2×255 byte	NA	NA	Yes	Yes
Software					
Windows 3.x	•	•	•	•	•
Windows 95	•	•	•	•	•
Windows NT	•	•	•	•	•
DOS	•				
OS/2	•				

Model	KPC-TM
Page	280
Description	High-Performance IEEE-488 Trigger Controller
I/O Channels	6
Sequencer RAM	1024 words
Trigger I/O	TTL-compatible, Trigger-Link compatible
Time Base Drift	100ppm
Trigger Input Pulse Width	400ns
Trigger Output Pulse Width	5µs
Detection Latency	900ns
Async Trigger Latency	2.2µs


Keithley gives you more of what you want in an IEEE-488 interface. More speed. More software. More examples. More problem solving ability. The net result is more IEEE-488 performance and improved productivity.

Solutions — not just accessories

Keithley offers a complete set of IEEE-488 interface boards, cables, adaptors, and software. The KPC-488.2, KPC-488.2AT, and KPCI-488 are our standard IEEE-488.2 interfaces for the PC. The KPC-488.2AT is a high speed version with the industry's fastest data transfer rate at 1.5MBytes per second. The KPCI-488 provides an IEEE interface to the PCI bus of your PC, while the KPCMCIA-GPIB95 and KPCMCIA-GPIB-NT products are PCMCIA cards supporting Windows 95/98 and Windows NT/2000 operating environments, respectively.

Software makes the difference

Each Keithley IEEE-488 interface includes complete programming language support for a wide range of languages under DOS and Microsoft Windows. The unique DEBUG-488 utility is a software bus analyzer that makes setup and program debug easy. Keithley driver software is compatible with industry standard software packages such as TestPoint, LabVIEW, LabWindows CVI, and Excel.

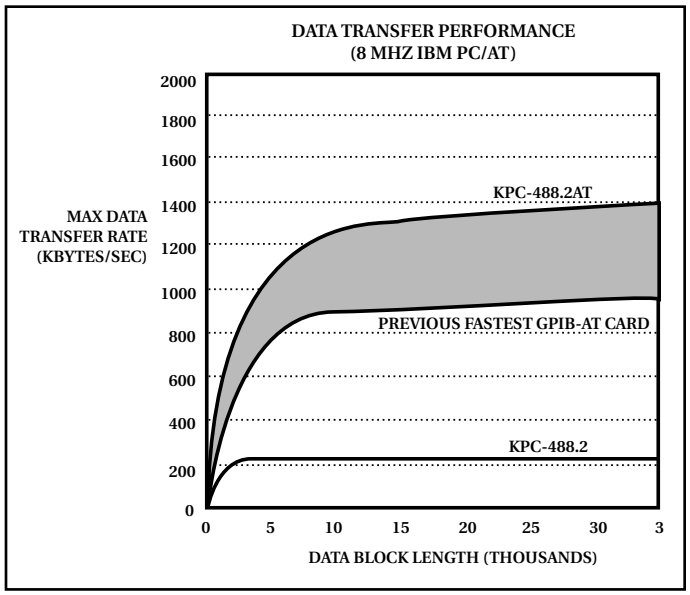

The KPC-488.2AT sets a new standard in IEEE-488 interface performance.

