

0-65 psi source tank regulator and gauge


Propane rated hose.  
Hose is buried or  
suspended. Source  
tank is secured 45'  
from flame effects.

Copper pilot light  
tube with steel  
wool

Nozzle

½ psi pilot light  
regulator

Controller

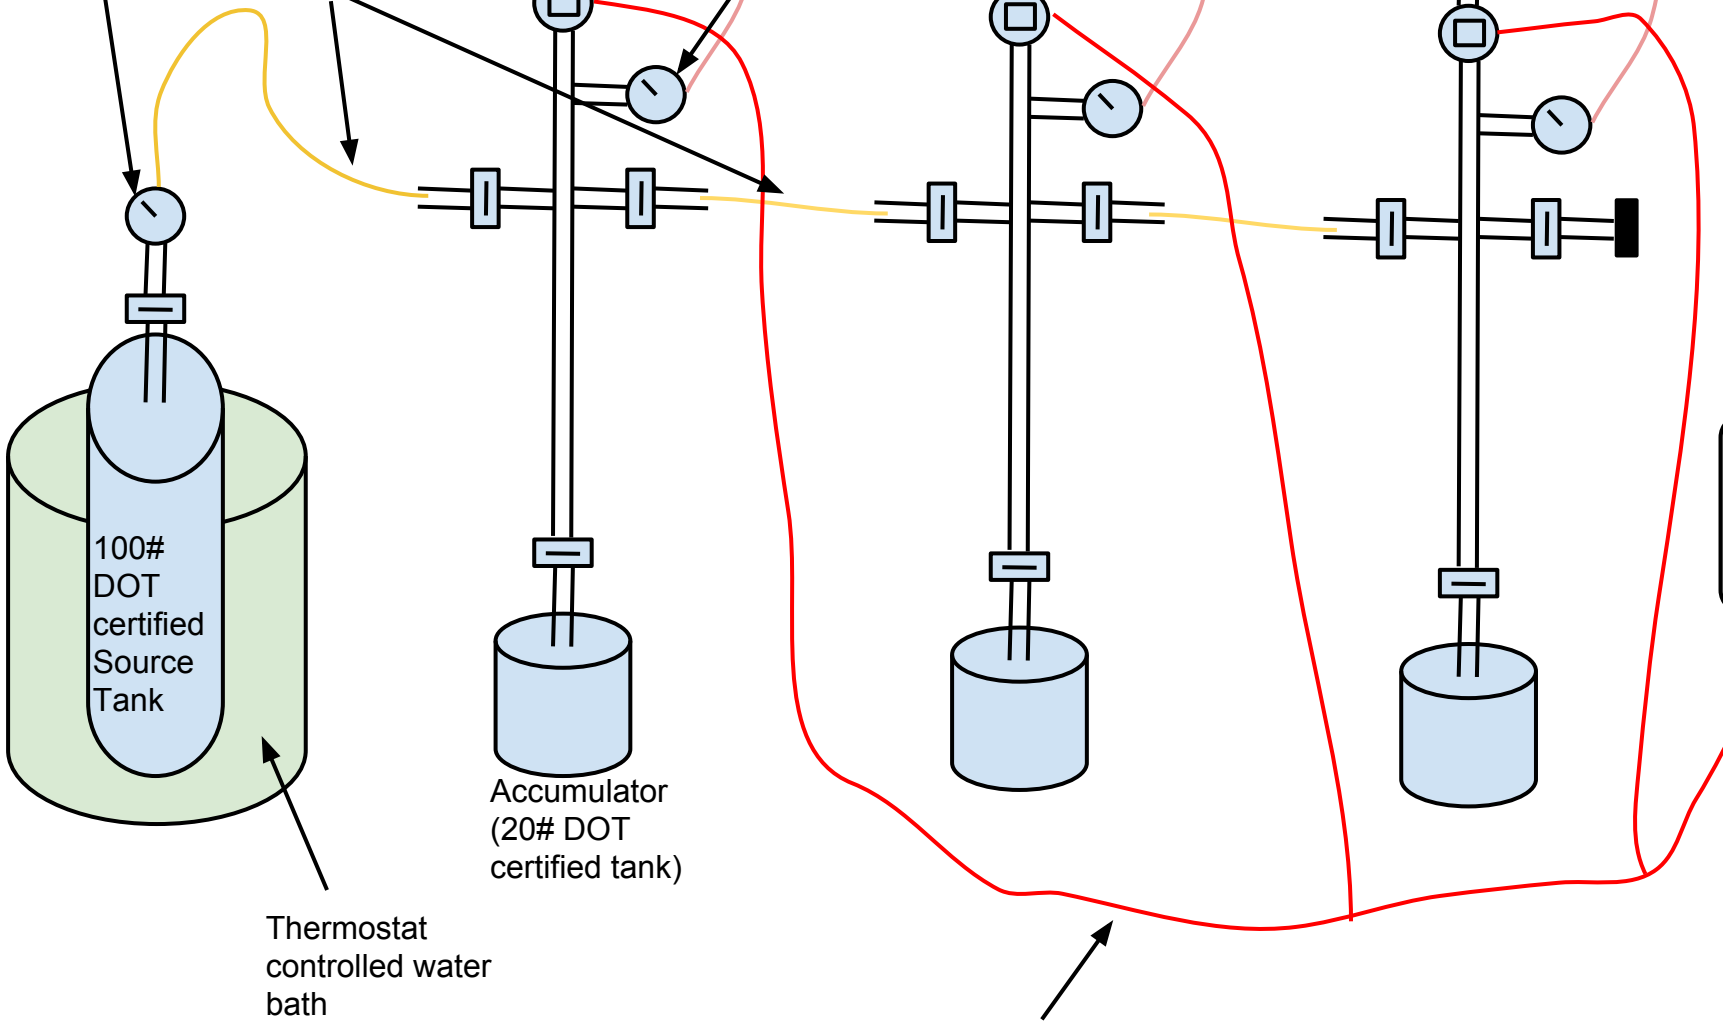






Accumulator  
(20# DOT  
certified tank)

Thermostat  
controlled water  
bath

12V control  
wires.  
Suspended 8'  
above ground.

- Notes:
- \* All fittings, valves and hoses are factory made and rated for propane
  - \* Pilot lights are approximately 9.5' above the ground
  - \* Flame puffs are over 10' above the ground
  - \* Electronic controls include safety keys to prohibit unauthorized operation
  - \* Nozzle and accumulator assemblies are contained within an 8' tall steel tower that is rebar staked to the playa.

	12V Solenoid Valve
	¼ turn ball valve
	¼ turn ball valve
	¾" Schedule 40 pipe
	Regulator