

FANUC

ROBOTS PRODUCT OVERVIEW



888-FANUC-US | WWW.FANUCAMERICA.COM | © FANUC AMERICA CORPORATION
HEADQUARTERS: 3900 W. HAMLIN RD. ROCHESTER HILLS, MI 48309 | ALL RIGHTS RESERVED

R-1000 Series



Robot Model	Max. Payload (kg)	Reach (mm)	Mass (kg)	Axes	Floor	Angle	Invert
R-1000iA/80F	80	2230	620	6	✓		✓
R-1000iA/80H	80	2230	610	5	✓		✓
★ R-1000iA/100F	100	2230	665	6	✓		✓
R-1000iA/130F	130	2230	675	6	✓		✓




★ **Featured Model**
R-1000iA/100F

R-2000



Robot Model	Max. Payload (kg)	Reach (mm)	Mass (kg)	Axes	Floor	Angle	Invert
R-2000iC/100P	100	3540	1470	6		RACK	
R-2000iC/100PH	100	3540	1495	6		RACK	
R-2000iC/125L	125	3100	1115	6	✓		
R-2000iC/165F	165	2655	1090	6	✓		
R-2000iC/165R	165	3095	1370	6		RACK	
R-2000iC/190S	190	2040	1120 1135*1	6	✓		✓
R-2000iC/190U	190	3100	1400	6			✓
★ R-2000iC/210F	210	2655	1090	6	✓		
R-2000iC/210L	210	3100	1350	6	✓		
R-2000iC/210R	210	3095	1370	6		RACK	
R-2000iC/210WE	210	2450	1180	6	✓		
R-2000iC/220U	220	2518	1020	6			✓
R-2000iC/240F	240	2655	1090	6	✓		
R-2000iC/270F	270 300*2	2655	1320	6	✓		
R-2000iC/270R	270	3095	1590	6		RACK	
R-2000iD/165FH	165	2605	1150	6	✓		
R-2000iD/100FH	100	2605	1150	6	✓		
R-2000iD/210FH	210	2605	1150	6	✓		

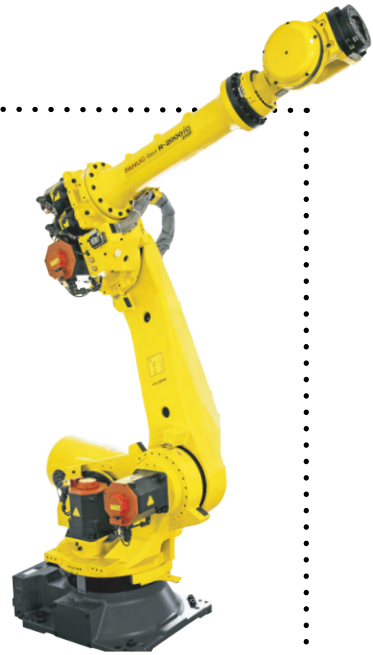

★ **Featured Model**
R-2000iC/210F

*1) When accuracy and stiffness enhancement option is specified
*2) With hardware and/or software option

M-410 Series




Robot Model	Max. Payload (kg)	Reach (mm)	Mass (kg)	Axes	Floor	Angle	Invert
M-410iB/140H	140	2850	1200	5	✓		
M-410iB/700	700	3143	2700	4	✓		
M-410iC/110	110	2403	1030	4	✓		
★ M-410iC/185	185	3143	1600 1330*1	4	✓		
M-410iC/315	315	3143	1600 1330*1	4	✓		
M-410iC/500	500	3143	2410 1910*1	4	✓		

Feature Spotlight: M-410iC/185

This compact four-axis model is designed for high speed palletizing, assembly, machining and parts transfer applications. The increased throughput makes it ideal for high volume production.

*1) Without pedestal

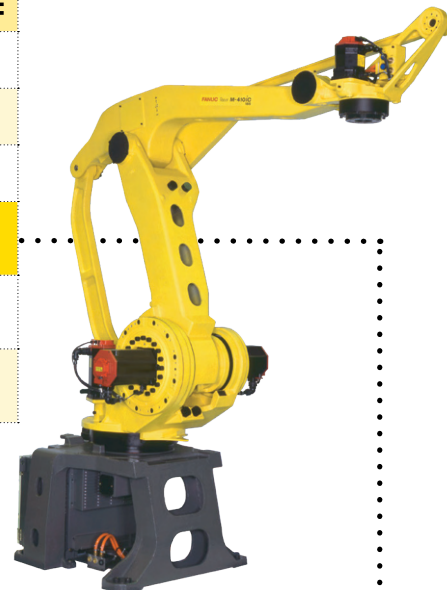

Featured Model
M-410iC/185


M-900 Series



Robot Model	Max. Payload (kg)	Reach (mm)	Mass (kg)	Axes	Floor	Angle	Invert
M-900iA/200P	200	3507	2670	6	RACK		
M-900iB/280L	280	3103	1600	6	✓	✓	✓
M-900iB/330L	330	3203	1780	6	✓		
★ M-900iB/360E	360	2655	1540	6	✓	✓	✓
M-900iB/400L	400	3704	3150	6	✓		
M-900iB/700E	700	2832	3030	6	✓		

Feature Spotlight: M-900iB/360E

The FANUC M-900iB/360E robot offers an enhanced wrist load capacity, large work envelope, and 2655mm reach. A robust 360kg payload, various mounting options, and six-axis operation maximizes the robot's flexibility to accommodate heavier payloads for assembly, parts transfer and machine tending applications.

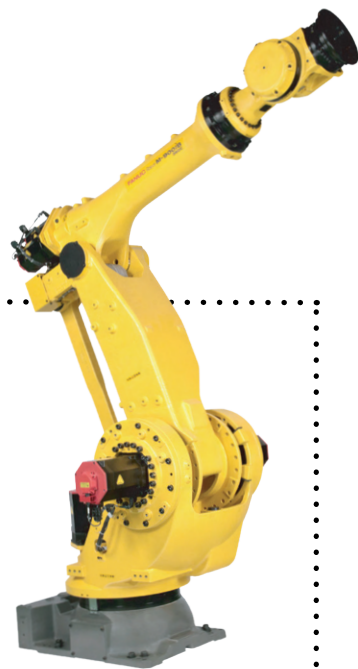

★ **Featured Model**
M-900iB/360E