

UNIVERSITÀ DEGLI STUDI DI PADOVA

Department of Civil, Environmental and Architectural Engineering

Master's Degree in Mathematical Engineering
Mathematical Modelling for Engineering and Science



MASTER'S THESIS

Investigations on some models in gradient elastoplasticity

Supervisor:

Prof. Filip Rindler
University of Warwick

Candidate:

Bernardo Ardini
2146900

Co-supervisor:

Prof. Giulio Giusteri
Università di Padova

Academic Year 2025/2026

Aims and results of the thesis

DA FARE

Some introductory notions

Developing mechanical models through the principle of virtual powers

Description of a mechanical system

The systems are the elements z of a separable and reflexive Banach space Z .

Generalized forces are the elements $\mathcal{F}$ of the dual space Z^* .

Equilibrium

Equilibrium is the balance

$$-\mathcal{J}(t) + \mathcal{X}(t) = 0 \quad \text{for a.e. } t \in (0, T)$$

between internal forces $\mathcal{J}: (0, T) \rightarrow Z^*$ and external forces $\mathcal{X}: (0, T) \rightarrow Z^*$.

PROBLEM. Given $z_0 \in Z$ and $\mathcal{X}$ find z such that $z(0) = z_0$ and equilibrium holds.

Constitutive relations

Let $\Psi: Z \rightarrow \mathbb{R} \cup \{0\}$ be the free energy and $\Phi: Z \rightarrow [0, \infty]$ the dissipation potential.

Internal forces are related to the evolution $z: [0, T] \rightarrow Z$ with a constitutive relation

$$\mathcal{J}(t) \in D\Psi(z(t)) + \partial\Phi(\dot{z}(t)) \quad \text{for a.e. } t \in (0, T).$$

DEFINITION. $\xi \in \partial\Phi(v)$ if $\Phi(w) \geq \Phi(v) + \langle \xi, w - v \rangle$ for all $w \in Z$.

PROPOSITION. If Φ is convex and $\Phi(0) = 0$ then $\langle \xi, v \rangle \geq 0$ for all $\xi \in \partial\Phi(v)$.

COROLLARY. $\frac{d}{dt}\Psi(z(t)) \leq \langle \mathcal{J}(t), \dot{z}(t) \rangle = \langle \mathcal{X}(t), \dot{z}(t) \rangle$.


Doubly nonlinear equation

$$\implies D\Psi(z(t)) + \partial\Phi(\dot{z}(t)) \ni \mathcal{X}(t)$$

for a.e. $t \in (0, T)$

A simple example

A block on the plane with friction pulled with a spring.




The space of configurations is $Z = \{z = (x, x_b) \in \mathbb{R}^2\}$. Let $w = (v, v_b)$ the generic rate of the system.

The free energy is $\Psi(z) = \frac{\kappa}{2}|x - x_b|^2$ while the dissipation potential is $\Phi(w) = Y|v_b| + \frac{\eta}{2}|v_b|^2$.

Start with $z(0) = (0, 0)$.

PROPOSITION. It holds that

$$\partial\Phi(v_b) = \begin{cases} [-Y, Y] & \text{if } v_b = 0 \\ \{Y \operatorname{sign} v_b + \eta v_b\} & \text{if } v_b \neq 0. \end{cases}$$



SOLUTION. It holds that $x = x_b + \frac{F}{\kappa}$. Moreover $\dot{x}_b = 0$ when $F < Y$ while $F = Y + \eta \dot{x}_b$ when $F \geq Y$.

Treating constraints with the method of Lagrange multipliers

Constrained kinematics

Let $K \subset Z$ closed and convex and impose the constraint $z(t) \in K$ for all $t \in [0, T]$.

Reaction force

Add a reaction force $\mathcal{P}: (0, T) \rightarrow Z^*$ satisfying $\mathcal{P}(t) \in -N_K(z(t)) = -\partial \iota_K(z(t))$ for a.e. $t \in (0, T)$.

Equilibrium

The equilibrium now reads

$$-\mathcal{J}(t) + \mathcal{X}(t) + \mathcal{P}(t) = 0 \quad \text{for a.e. } t \in (0, T).$$

PROBLEM. Given $z_0 \in Z$ and $\mathcal{X}$ find z and $\mathcal{P}$ such that $z(0) = z_0$, $z(t) \in K$ for all $t \in [0, T]$, $\mathcal{P}(t) \in -N_K(z(t))$ for a.e. $t \in (0, T)$ and equilibrium holds.

$\Rightarrow$

Constitutive relations

Let again $\Psi: Z \rightarrow \mathbb{R} \cup \{0\}$ be the free energy.

Now the dissipation potential $\Phi: Z^* \times Z \rightarrow [0, \infty]$, $(\mathcal{P}, w) \mapsto \Phi(\mathcal{P}, w)$ can depend on the reaction force.

The constitutive relations become

$$\mathcal{J}(t) \in D\Psi(z(t)) + \partial_w \Phi(\mathcal{P}(t), \dot{z}(t))$$

for a.e. $t \in (0, T)$.

Constrained doubly nonlinear equation

$$z(t) \in K \quad \text{for all } t \in [0, T]$$

$$\mathcal{P}(t) \in -N_K(z(t))$$

$$D\Psi(z(t)) + \partial \Phi(\mathcal{P}(t), \dot{z}(t)) \ni \mathcal{X}(t) + \mathcal{P}(t)$$

for a.e. $t \in (0, T)$

Necking of a metallic cylindrical bar

Modeling dilatant and pressure sensitive elastoplastic materials

Classical approach

Kinematics

The space of configurations is $Z = \{(u, E_p)\}$ with the displacement $u \in H^1(\Omega, \mathbb{R}^d)$ and the plastic strain $E_p \in H^1(\Omega, \text{Sym})$. The elastic strain is $E_e = Eu - E_p$.

The generic rate is $w = (v, V_p)$ and the elastic rate is $V_e = Ev - V_p$.


Statics

The internal generalized force is

$$\langle J, w \rangle = \int_{\Omega} \left[T_e : V_e + T_p : \text{grad } V_p + K_p : \text{grad } V_p \right] dx$$

with $T_e : \Omega \rightarrow \text{Sym}$ the elastic stress, $T_p : \Omega \rightarrow \text{Sym}$ the plastic force and $K_p : \Omega \rightarrow \text{Sym} \otimes \mathbb{R}$ the plastic stress. The external generalized force is

$$\langle X, w \rangle = \int_{\Omega} f \cdot v dx + \int_{\partial\Omega} h \cdot v dx.$$



PROPOSITION. The strong form of the equilibrium is

$$\begin{aligned} \text{div } T_e + f &= 0 \\ T_e - T_p + \text{div } K_p &= 0 \end{aligned} \quad \text{in } \Omega$$

and $T_e n = h$, $K_p n = 0$ in $\partial\Omega$.

Classical approach

Constitutive relations

Let the free energy

$$\Psi(z) = \int_{\Omega} \left[\frac{1}{2} \mathfrak{C} E_e : E_e + \frac{1}{2} b |K_p|^2 \right] dx$$

that implies

$$T_e = \mathfrak{C} E_e \quad \text{and} \quad K_p = b \operatorname{grad} E_p.$$

Yield condition and non-associated flow rule

Fix $f, g: \operatorname{Sym} \rightarrow \mathbb{R}$ convex. Let $C = \{f \leq 0\}$ and $L = \{g \leq 0\}$.

Impose that $T_p \in C$. The yield condition is $T_p \in \partial C$ and the flow rule is

$$\dot{E}_p \in \begin{cases} \{0\} & \text{if } T_p \in \operatorname{int} C \\ N_L(T_p) & \text{if } T_p \in \partial C. \end{cases}$$


PROPOSITION. If $f = g$, is equivalent to $T_p \in \partial \sigma_C(\dot{E}_p)$ with $\sigma_C(\dot{E}_p) = \sup_{T_p \in C} T_p : \dot{E}_p$.

EXAMPLE. Drucker–Prager yield criterion

$$f(T_p) = |\operatorname{dev} T_p| - \left(f_0 - a \frac{\operatorname{tr} T_p}{d} \right)$$

$$g(T_p) = |\operatorname{dev} T_p| + b \frac{\operatorname{tr} T_p}{d}$$

with $0 \leq b \leq a$.



The flow rule $\dot{E}_p = \gamma \frac{\partial g}{\partial T_p}(T_p)$ implies

$$\operatorname{dev} \dot{E}_p = \gamma \frac{\operatorname{dev} T_p}{|\operatorname{dev} T_p|}, \quad \operatorname{tr} \dot{E}_p = b |\operatorname{dev} \dot{E}_p|$$

with $\gamma f(T_p) = 0$, $f(T_p) \leq 0$ and $\gamma \geq 0$.

Proposal of an alternative approach

Kinematics

The space of configurations is $Z = \{(u, \pi, \alpha, \lambda)\}$ with the displacement $u \in H^2(\Omega, \mathbb{R}^d)$ the deviatoric plastic strain $\pi \in H^1(\Omega, \text{DevSym})$, the damage variable $\alpha \in H^1(\Omega)$ and the volumetric plastic strain $\lambda \in L^2(\Omega)$. The total plastic strain is $E_p = \pi + \frac{\lambda}{d} I$ and the elastic strain is $E_e = Eu - E_p$.

The generic rate is $w = (v, \rho, \beta, \mu)$, the plastic rate is $V_p = \rho + \frac{\mu}{d} I$ and the elastic rate is $V_e = Ev - V_p$.

Add the kinematic constrain $z \in K = \{\lambda = L(\alpha)\}$ with $L: \mathbb{R} \rightarrow \mathbb{R}$


$$\int_{\Omega} (\lambda - L(\alpha)) q \, dx = 0 \quad \text{for all } q \in L^2(\Omega).$$

Micropressure

Parametrize the constraint reaction $\mathcal{P} \in -N_K(z)$ as

$$\langle \mathcal{P}, w \rangle = \int_{\Omega} p(\mu - L'(\alpha)\beta) \, dx$$

with $p \in L^2(\Omega)$ the micropressure.



Notation

Define

$$\begin{aligned} Y &= \{y = (u, \pi, \alpha)\} \\ \Lambda &= \{\lambda\} \\ \Lambda^* &= \{p\}. \end{aligned}$$

and $\mathcal{L}: Y \rightarrow \Lambda$ by $\mathcal{L}(y) = L(\alpha)$. Denote the virtual rate as $w = (h, \mu)$ with $h = (v, \rho, \beta) \in Y$ and $\mu \in \Lambda$. Then

$$\begin{aligned} \lambda &= \mathcal{L}(y) \\ \langle \mathcal{P}, w \rangle &= \langle p, \mu \rangle - \langle \mathcal{L}'(y)^* p, h \rangle. \end{aligned}$$

Proposal of an alternative approach

Statics


The internal generalized force is

$$\begin{aligned}\langle \mathcal{J}, w \rangle = & \int_{\Omega} \left[T : E v + K : \dot{\text{grad}}^2 u \right] dx + \\ & + \int_{\Omega} \left[T_e : V_e + T_p : \rho + K_p : \dot{\text{grad}} \rho \right] dx + \\ & + \int_{\Omega} [\tau \beta + \kappa \cdot \text{grad} \beta] dx\end{aligned}$$

with $T: \Omega \rightarrow \text{Sym}$ the macroscopic stress, $K: \Omega \rightarrow \text{Lin} \otimes \mathbb{R}$ the macroscopic hyperstress, $T_e: \Omega \rightarrow \text{Sym}$ the elastic stress, $T_p: \Omega \rightarrow \text{DevSym}$ the plastic force, $K_p: \Omega \rightarrow \text{DevSym} \otimes \mathbb{R}$ the plastic stress, $\tau: \Omega \rightarrow \mathbb{R}$ the damage force and $\kappa: \Omega \rightarrow \mathbb{R}^d$ the damage stress. The external generalized force is

$$\langle \mathcal{X}, w \rangle = \int_{\Omega} f \cdot v dx + \int_{\partial\Omega} h \cdot v dx.$$

The equilibrium is $-\mathcal{J} + \mathcal{X} + \mathcal{P} = 0$.



PROPOSITION. The strong form of the equilibrium is

$$\begin{aligned}\text{div}(T + T_e - \text{div} K) + f &= 0 \\ \text{dev} T_e - T_p + \text{div} K_p &= 0 \\ -\tau + \text{div} \kappa - L'(\alpha)p &= 0 \quad \text{in } \Omega \\ p &= -\frac{\text{tr} T_e}{d}\end{aligned}$$

and $K_p n = 0$, $\kappa \cdot n$ in $\partial\Omega$.

Proposal of an alternative approach

Constitutive relations

Let the free energy be $\Psi(z) = \Psi_0(z) + \frac{1}{2}\langle \mathcal{A}y, y \rangle$ with

$$\Psi_0(z) = \int_{\Omega} \left[\frac{1}{2} \mathfrak{C} E_e : E_e + W_d(\alpha) \right] dx$$

and

$$\begin{aligned} \frac{1}{2} \langle \mathcal{A}y, y \rangle = \\ \frac{1}{2} \int_{\Omega} [a |\text{grad}^2 u|^2 + b |\text{grad} \pi|^2 + c |\text{grad} \alpha|^2] dx. \end{aligned}$$

Let the dissipation potential be $\Phi(p, w) = \Phi_0(p, h) + \frac{1}{2} \langle \mathcal{D}h, h \rangle$ with

$$\Phi_0(p, h) = \int_{\Omega} [R(p, \rho) + Q(\rho, \beta)] dx$$

and

$$\frac{1}{2} \langle \mathcal{D}h, h \rangle = \frac{1}{2} \int_{\Omega} [\mathfrak{D} E v : E v + \mathfrak{d} |\rho|^2 + \mathfrak{e} |\beta|^2] dx.$$



EXAMPLE. From the micromechanical picture


$$L(\alpha) = b \alpha_0 \left[1 - \exp \left(-\frac{\alpha}{\alpha_0} \right) \right]$$

$$W_d(\alpha) = f_0 \alpha_1 \left[1 - \exp \left(-\frac{\alpha}{\alpha_1} \right) \right]$$

$$R(p, \rho) = Y p |\rho|$$

$$Q(\rho, \beta) = \begin{cases} 0 & \text{if } \beta \geq |\rho| \\ \infty & \text{if } \beta < |\rho|. \end{cases}$$

Thus $\dot{\alpha} \geq |\dot{\pi}|$.



Proposal of an alternative approach

Constitutive relations

Then

$$\mathbf{T} = \mathfrak{D} \mathbf{E} \dot{\mathbf{u}}$$

$$\mathbf{T}_e = \mathfrak{E} \mathbf{E}_e$$

$$\mathbf{T}_p \in \partial_\rho \mathbf{R}(\mathbf{p}, \dot{\pi}) + \partial_\rho \mathbf{Q}(\dot{\pi}, \dot{\alpha}) + \partial \dot{\pi}$$

$$\boldsymbol{\tau} \in \mathbf{W}'_d(\boldsymbol{\alpha}) + \partial_\beta \mathbf{Q}(\dot{\pi}, \dot{\alpha}) + \mathfrak{e} \dot{\alpha}$$

and

$$\mathbf{K} = \mathfrak{a} \operatorname{grad}^2 \mathbf{u}$$


$$\mathbf{K}_p = \mathfrak{b} \operatorname{grad} \pi$$

$$\boldsymbol{\kappa} = \mathfrak{c} \operatorname{grad} \boldsymbol{\alpha}.$$

Interpretation

$\mathbf{Q}$ links the evolution of $\boldsymbol{\alpha}$ to that of π . $\mathbf{W}_d$ is the energy needed to create damage. $\mathbf{R}$ model the pressure dependent friction between the grains.

The viscous and gradient terms regularize the solution.



EXAMPLE. From the micromechanical picture


$$L(\alpha) = b \alpha_0 \left[1 - \exp \left(-\frac{\alpha}{\alpha_0} \right) \right]$$

$$\mathbf{W}_d(\boldsymbol{\alpha}) = f_0 \alpha_1 \left[1 - \exp \left(-\frac{\alpha}{\alpha_1} \right) \right]$$

$$\mathbf{R}(\mathbf{p}, \rho) = \mathbf{Y} \mathbf{p} |\rho|$$

$$\mathbf{Q}(\rho, \beta) = \begin{cases} 0 & \text{if } \beta \geq |\rho| \\ \infty & \text{if } \beta < |\rho|. \end{cases}$$

Thus $\dot{\alpha} \geq |\dot{\pi}|$.



Proposal of an alternative approach

Recovering the Ducker–Prager model

PROPOSITION. Letting $L(\alpha) = b\alpha$, $W_d = f_0\alpha$ and $Y = \alpha - b$ we recover the Ducker–Prager model.

SKETCH OF THE PROOF. For simplicity disregard viscous and gradient terms. Recall the balance

$$\begin{aligned}\operatorname{dev} T_e - T_p &= 0 \\ -\tau - L'(\alpha)p &= 0.\end{aligned}$$


This becomes

$$\begin{aligned}\operatorname{dev} T_e &\in (\alpha - b)\partial|\cdot|(\dot{\pi}) + \partial_p Q(\dot{\pi}, \dot{\alpha}) \\ f_0 + bp &\in -\partial_\beta Q(\dot{\pi}, \dot{\alpha}).\end{aligned}$$

The choice $Y = \alpha - b$ weights correctly the contributions of plastic deviatoric and damage resistance to provide the right yield condition

$$|\operatorname{dev} T_e| \leq f_0 + \alpha p.$$

The flow rule is satisfied since $\dot{\lambda} = b\dot{\alpha} = b|\dot{\pi}|$. $\square$



LEMMA. When $\dot{\pi} \neq 0$ and $\dot{\alpha} = |\dot{\pi}|$ the generic element of $\partial Q(\dot{\pi}, \dot{\alpha})$ is $\left(-\theta \frac{\dot{\pi}}{|\dot{\pi}|}, \theta\right)$ with $\theta \leq 0$. When $\dot{\pi} = 0$ and $\dot{\alpha} = 0$ is (Θ, θ) with $\theta \leq 0$ and $\Theta \in \operatorname{DevSym}$ with $|\Theta| \leq |\theta|$.

Formulation of the problem

Assume homogeneous boundary conditions. Given $f \in H^1((0, T), H^{-1}(\Omega, \mathbb{R}^d))$ let

$$\langle \mathcal{X}(t), h \rangle = \langle f(t), v \rangle$$

PROBLEM. Find $z = (y, \lambda): [0, T] \rightarrow Z$ and $p: [0, T] \rightarrow \Lambda^*$ such that $z(0) = 0$ and

$$\begin{aligned} D_y \Psi_0(z(t)) + \mathcal{A}y(t) + \\ + \partial_h \Phi_0(p(t), \dot{y}(t)) + \mathcal{D}\dot{y}(t) - \\ - \mathcal{L}'(y(t))^* p(t) \ni \mathcal{X}(t) \end{aligned}$$

$$D_\lambda \Psi_0(z(t)) + p(t) = 0$$

$$\lambda(t) = \mathcal{L}(y(t))$$

for a.e. $t \in (0, T)$.

Existence and uniqueness theorem

Let $H = \{y = (u, \pi, \alpha)\}$ with $u \in H^1(\Omega, \mathbb{R}^d)$, $\pi \in L^2(\Omega, \text{DevSym})$ and $\alpha \in L^2(\Omega)$.

Assume that

- L is bounded, differentiable and with bounded and Lipschitz derivative
- W_d is differentiable with Lipschitz derivative
- $R(p, \rho) = Y(p)\tilde{R}(\rho)$ with Y positive and Lipschitz, $\tilde{R}: \text{DevSym} \rightarrow [0, \infty)$ convex, Lipschitz and $\tilde{R}(0) = 0$
- $Q: \text{DevSym} \times \mathbb{R} \rightarrow [0, \infty]$ is positive convex, l.s.c. Lipschitz on its domain and $Q(0, 0) = 0$.



THEOREM. There exist a unique solution $z = (y, \lambda)$ and p with $z(0) = 0$, $y \in W^{1,\infty}((0, T); Y)$, $\dot{y} \in C^0([0, T], H)$, $\lambda \in C^0([0, T], \Lambda)$ and $p \in C^0([0, T], \Lambda^*)$. Moreover these quantities depend continuously on the data with respect to the norms of their spaces.

Contact torque as Lagrange multiplier

Let $\Sigma \subset \Omega$ be an oriented smooth surface. Remove the constraint of continuity of $\frac{\partial u}{\partial n}$ across Σ and impose it with the method of Lagrange multipliers

$$\int_{\Sigma} \left\| \frac{\partial u}{\partial n} \right\| \cdot l \, dx = 0, \quad \langle \mathcal{M}, h \rangle = \int_{\Sigma} m \cdot \left\| \frac{\partial v}{\partial n} \right\| \, dx.$$

for all $l \in H^{-1/2}(\Sigma, \mathbb{R}^d)$. Here $m \in H^{-1/2}(\Sigma, \mathbb{R}^d)$ is the contact torque.



Let $Y_{\Sigma} = \{y = (u, \pi, \alpha)\}$ with $u \in H^1(\Omega, \mathbb{R}^d) \cap H^2(\Omega \setminus \Sigma, \mathbb{R}^d)$ and π, α as before.

PROBLEM. Find $z = (y, \lambda): [0, T] \rightarrow Y_{\Sigma} \times \Lambda$ and $p: [0, T] \rightarrow \Lambda^*$ such that $z(0) = 0$ and

$$\begin{aligned} D_y \Psi_0(z(t)) + \mathcal{A}y(t) + \\ + \partial_h \Phi_0(p(t), \dot{y}(t)) + \mathcal{D}\dot{y}(t) - \\ - \mathcal{L}'(y(t))^* p(t) \ni \mathcal{X}(t) + \mathcal{M}(t) \end{aligned}$$

$$D_{\lambda} \Psi_0(z(t)) + p(t) = 0$$

$$\lambda(t) = \mathcal{L}(y(t))$$

$$\left\| \frac{\partial u}{\partial n}(t) \right\| = 0 \quad \text{on } \Sigma$$

for a.e. $t \in (0, T)$.

Numerical approximation

Finite element spaces

Fix a triangulation $\mathcal{T}_l = \{K\}$ and define $\Sigma_l = \Omega \cap \bigcup_{K \in \mathcal{T}_l} \partial K$. Let

$$u \in H_0^1(\Omega, \mathbb{R}^2) \quad P2$$

$$\pi \in H^1(\Omega, \text{DevSym}) \quad P1$$


$$\alpha \in H^1(\Omega) \quad P1$$

$$\lambda \in L^2(\Omega) \quad P0$$

$$p \in L^2(\Omega) \quad P0$$

$$m \in H^{-1/2}(\Sigma_l, \mathbb{R}^d) \quad P0$$

and consider the finite element spaces $Y_l = \{y = (u, \pi, \alpha)\}$, $\Lambda_l = \{\lambda\}$, $P_l = \{p\}$ and $M_l = \{m\}$.



Notice that $u \in H_0^2(\Omega \setminus \Sigma_l, \mathbb{R}^2)$.

Numerical scheme

Fix time steps τ^k with $k \in \{1, \dots, N\}$.

PROBLEM. Find $z_\tau^k = (y_\tau^k, \lambda_\tau^k) \in Y_l \times \Lambda_l$, $p_\tau^k \in P_l$ and $m_\tau^k \in M_l$ such that $z^0 = 0$ and

$$\begin{aligned} & \left\langle D_y \Psi_0(z^k) + \mathcal{A} y^k + \right. \\ & \left. + D_h \Phi_0 \left(p^k, \frac{y^k - y^{k-1}}{\tau^k} \right) + \mathcal{D} \frac{y^k - y^{k-1}}{\tau^k} - \right. \\ & \left. - \mathcal{L}'(y^k)^* p^k - \mathcal{X}^k - \mathcal{M}^k, h \right\rangle = 0 \end{aligned}$$

$$\langle D_\lambda \Psi_0(z^k) + p^k, \mu \rangle = 0$$

$$\langle \lambda^k - \mathcal{L}(y^k), q \rangle = 0$$


$$\left\langle l, \left\| \frac{\partial u^k}{\partial n} \right\| \right\rangle = 0$$

for all $h \in Y_l$, $\mu \in \Lambda_l$, $q \in P_l$, $l \in M_l$ and $k \in \{1, \dots, N\}$.

Numerical approximation

Validation

Validate comparing with an analytical solution.





The solution is spatially homogeneous.

Regularize the dissipation potentials with the Yosida approximation

$$\tilde{R}_\eta(\rho) = \inf_{\xi \in \text{DevSym}} \left[\frac{|\rho - \xi|^2}{2\eta} + |\xi| \right]$$

$$Q_\eta = \frac{1}{2\eta} \text{dist}_{\text{dom } Q}(\rho, \beta)^2.$$


with $\eta > 0$.

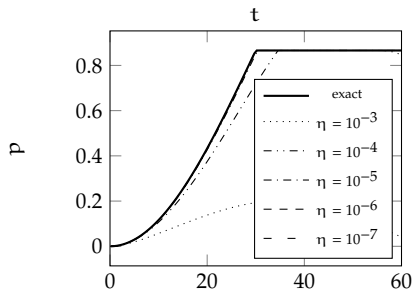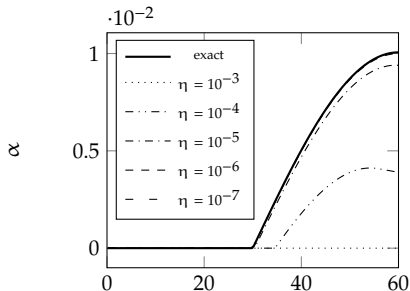

Numerical approximation

An example

The aim is to show the formation of a shear band.






Let $\zeta > 0$ a multiplier of the gradient coefficients a , b , c .

Choose

$$a = \sqrt{2} \sin \phi \quad b = \sqrt{2} \sin \psi \quad f_0 = \sqrt{2} c \cos \phi$$

with $c > 0$ the cohesion, $\phi, \psi \in [0, 90^\circ)$ the friction and dilatancy angle.



Supplementary material

Abstract existence and uniqueness for constrained doubly nonlinear equations

Assumptions

Let $Z = Y \times \Lambda$ with Y, Λ separable and reflexive Banach spaces. Let H a separable and reflexive Banach space such that $Y \subset H$ with compact and dense inclusion and

$$c_P \|y\|_Y \leq \|y\|_H + |y|_Y \leq C_P \|y\|_Y.$$

Let $\mathcal{L}: H \rightarrow \Lambda$ bounded, differentiable with bounded and Lipschitz differential.

Let $\Psi(z) = \Psi_0(z) + \frac{1}{2} \langle \mathcal{A}y, y \rangle$ and $\Phi(p, h) = \Phi_p(p, h) + \frac{1}{2} \langle \mathcal{D}h, h \rangle$ with

- $\Psi_0: H \times \Lambda \rightarrow \mathbb{R}$ Fréchet differentiable with Lipschitz differential
- $\mathcal{A} \in \mathcal{L}(Y, Y^*)$ self-adjoint and $\langle \mathcal{A}y, y \rangle \geq C_A |y|_V^2$
- $\Phi_0: \Lambda^* \times H \rightarrow [0, \infty]$ with $\Phi_0(p, \cdot)$ convex, $\Phi_0(p, 0) = 0$, $|\Phi_0(p, h_1) - \Phi_0(p, h_2)| \leq C_\Phi (\|p\|_\Lambda + 1) \|h_1 - h_2\|_H$, $|\Phi_0(p_1, h) - \Phi_0(p_2, h)| \leq C_\Phi \|p_1 - p_2\|_{\Lambda^*} \|h\|_H$, $|\Phi_0(p_1, h_1) - \Phi_0(p_1, h_2) + \Phi_0(p_2, h_2) - \Phi_0(p_2, h_1)| \leq C_\Phi \|p_1 - p_2\|_{\Lambda^*} \|h_1 - h_2\|_H$
- $\mathcal{D} \in \mathcal{L}(H, H^*)$ self-adjoint and $\langle \mathcal{D}h, h \rangle \geq C_D \|h\|_H^2$

Abstract existence and uniqueness for constrained doubly nonlinear equations

Formulation of the problem

Let $\mathcal{X} \in H^1((0, T), H^*)$ assigned.

PROBLEM. Find $z = (y, \lambda): [0, T] \rightarrow Z$ and $p: [0, T] \rightarrow \Lambda^*$ such that $z(0) = 0$ and

$$\begin{aligned} D_y \Psi_0(z(t)) + \mathcal{A}y(t) + \\ + \partial_h \Phi_0(p(t), \dot{y}(t)) + \mathcal{D}\dot{y}(t) - \\ - \mathcal{L}'(y(t))^* p(t) \ni \mathcal{X}(t) \end{aligned}$$

$$D_\lambda \Psi_0(z(t)) + p(t) = 0$$

$$\lambda(t) = \mathcal{L}(y(t))$$

for a.e. $t \in (0, T)$.

Existence and uniqueness theorem

THEOREM. There exist a unique solution $z = (y, \lambda)$ and p with $z(0) = 0$, $y \in W^{1,\infty}((0, T); Y)$, $\dot{y} \in C^0([0, T], H)$, $\lambda \in C^0([0, T], \Lambda)$ and $p \in C^0([0, T], \Lambda^*)$. Moreover these quantities depend continuously on the data with respect to the norms of their spaces.

SKETCH OF THE PROOF. Discretize in time.

$$\begin{aligned} D_y \Psi_0(z_N^k) + \mathcal{A}y_N^k + \\ + \partial_h \Phi_0 \left(p_N^k, \frac{y_N^k - y_N^{k-1}}{\tau_N} \right) + \mathcal{D} \frac{y_N^k - y_N^{k-1}}{\tau_N} - \\ - \mathcal{L}'(y_N^k)^* p_N^k \ni \mathcal{X}_N^k \end{aligned}$$

$$D_\lambda \Psi_0(z_N^k) + p_N^k = 0$$

$$\lambda_N^k = \mathcal{L}(y_N^k).$$

Substitute the constraint in the first equation and consider the equation in y_N^k for each p_N^k fixed

$$\begin{aligned} D_y \Psi_0(\mathcal{L}(y_N^k), y_N^k) + \mathcal{A}y_N^k + \\ + \partial_h \Phi_0 \left(p_N^k, \frac{y_N^k - y_N^{k-1}}{\tau_N} \right) + \mathcal{D} \frac{y_N^k - y_N^{k-1}}{\tau_N} - \\ - \mathcal{L}'(y_N^k)^* p_N^k \ni \mathcal{X}_N^k. \end{aligned}$$

Abstract existence and uniqueness for constrained doubly nonlinear equations

Is of the form $F(y) + \partial \Xi(y) \ni 0$ with $F: H \rightarrow H^*$ continuous and $\Xi: Y \rightarrow [0, \infty]$ convex. Coercivity

$$\lim_{\|y\|_Y \rightarrow \infty} \frac{\Xi(y) + \langle F(y), y \rangle}{\|y\|_Y} = \infty$$

if τ is small thanks to viscosity. Minty–Browder theorem ensures that the solution $y_N^k = \mathcal{U}(p_N^k)$ exists unique for all p_N^k .

The second equation becomes

$$p_N^k = -D_\lambda \Psi_0(\mathcal{L}(\mathcal{U}(p_N^k)), \mathcal{U}(p_N^k)) = \mathcal{T}(p_N^k).$$

Existence is established with Schauder fixed-point theorem.

The discrete solution has been constructed. Let $\bar{y}_N, y_N$ be the piecewise constant and affine interpolations of y_N^k . Let $\hat{y}_N$ be the piecewise constant interpolation of $\dot{y}_N^k$.

A priori estimates gives y_N bounded in $W^{1,\infty}((0, T), Y)$ and $\hat{y}_N$ bounded in $L^2((0, T), H)$. By compactness

$$y_N \overset{*}{\rightharpoonup} y \quad \text{in } W^{1,\infty}((0, T), Y)$$

$$y_N \rightarrow y \quad \text{in } C^0([0, T], Y)$$

$$\bar{y}_N \rightarrow y \quad \text{in } L^2((0, T), Y)$$

$$\hat{y}_N \rightarrow \dot{y} \quad \text{in } L^2([0, T], H).$$

Letting $\lambda_N = \mathcal{L}(y_N)$, $\bar{\lambda}_N = \mathcal{L}(\bar{y}_N)$, $\lambda = \mathcal{L}(y)$, $p_N = -D_\lambda \Psi_0(z_N)$, $\bar{p}_N = -D_\lambda \Psi_0(\bar{z}_N)$, $p = -D_\lambda \Psi_0(z)$,

$$\lambda_N \rightarrow \lambda \quad \text{in } C^0([0, T], \Lambda)$$

$$\bar{\lambda}_N \rightarrow \lambda \quad \text{in } L^2((0, T), \Lambda)$$

$$p_N \rightarrow p \quad \text{in } C^0([0, T], \Lambda^*)$$

$$\bar{p}_N \rightarrow p \quad \text{in } L^2((0, T), \Lambda^*).$$

This allows to pass to the limit.

□