




LED Indicator, 2k serial resistor (max load 4 x 2.5 mA)

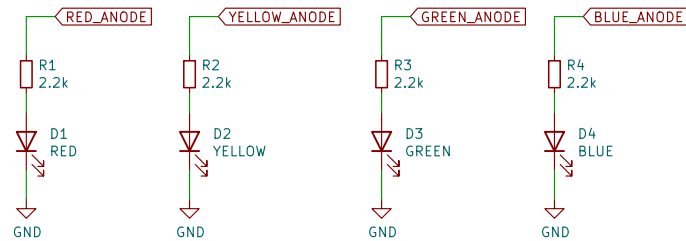


Breakout Board Pin-Out

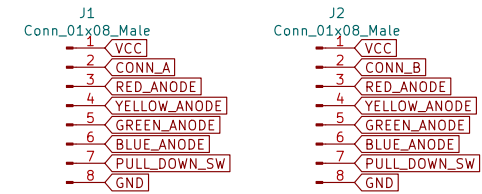

Always connect GND.
Pull-down: also connect VCC (3–5V).
Max pull-down current: 0.5 mA.

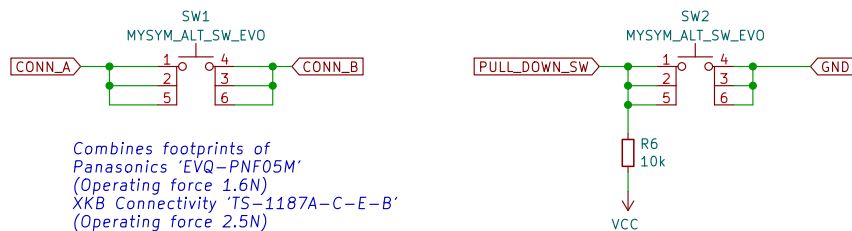

Power and GND Input



License: CC BY-NC-SA 4.0

<https://creativecommons.org/licenses/by-nc-sa/4.0/>

Design by Debinix Team

NOTE: UNLESS OTHERWISE SPECIFIED
 1. RESISTORS: OHMS, 0805, 1%, 1/16W
 2. LEDs: 0805

Traita Group Electronics

Sheet: /

File: led-sw-breakout.kicad_sch

Title: 4xLEDs, Switch through and Pull-Down Breakout Board

Size: A4

Date: 2022-10-02

Rev: 1.1

KiCad E.D.A. kicad 6.0.7+dfsg-1-bpo11+1

Id: 1/1