LCD / LCM SPECIFICATION



RAYSTAR Optronics, Inc.
曜凌光電股份有限公司

曜凌光電股份有限公司
Raystar Optronics, Inc.
T: +886-4-2565-0761 | F: +886-4-2565-0760
sales@raystar-optronics.com | www.raystar-optronics.com

RC1604A

SPECIFICATION

General Specification

The Features is described as follow：

- Module dimension：87.0 x 60.0 x 13.6(max.) mm
- View area：62.0 x 26.0 mm
- Active area：56.20 x 20.80 mm
- Number of Characters：16 characters x 4 Lines
- Dot size：0.55 x 0.55 mm
- Dot pitch：0.60 x 0.60 mm
- Character size：2.95 x 4.75 mm
- Character pitch：3.55 x 5.35 mm
- Duty：1/16
- Backlight Type：LED
- IC：ST7066U
- Interface：68 series


RAYSTAR OPTRONICS


Interface Pin Function

Pin No.	Symbol	Level	Description
1	V_{SS}	0V	Ground
2	V_{DD}	5.0V	Supply Voltage for logic
3	VO	(Variable)	Operating voltage for LCD
4	RS	H/L	H：DATA, L：Instruction code
5	R/W	H/L	H：Read (Module --> MPU) L：Write(MPU --> Module)
6	E	H,H→L	Chip enable signal
7	DB0	H/L	Data bus line
8	DB1	H/L	Data bus line
9	DB2	H/L	Data bus line
10	DB3	H/L	Data bus line
11	DB4	H/L	Data bus line
12	DB5	H/L	Data bus line
13	DB6	H/L	Data bus line
14	DB7	H/L	Data bus line
15	A	—	Power supply for B/L +
16	K	—	Power supply for B/L -

RAYSTAR OPTRONICS


Contour Drawing &Block Diagram

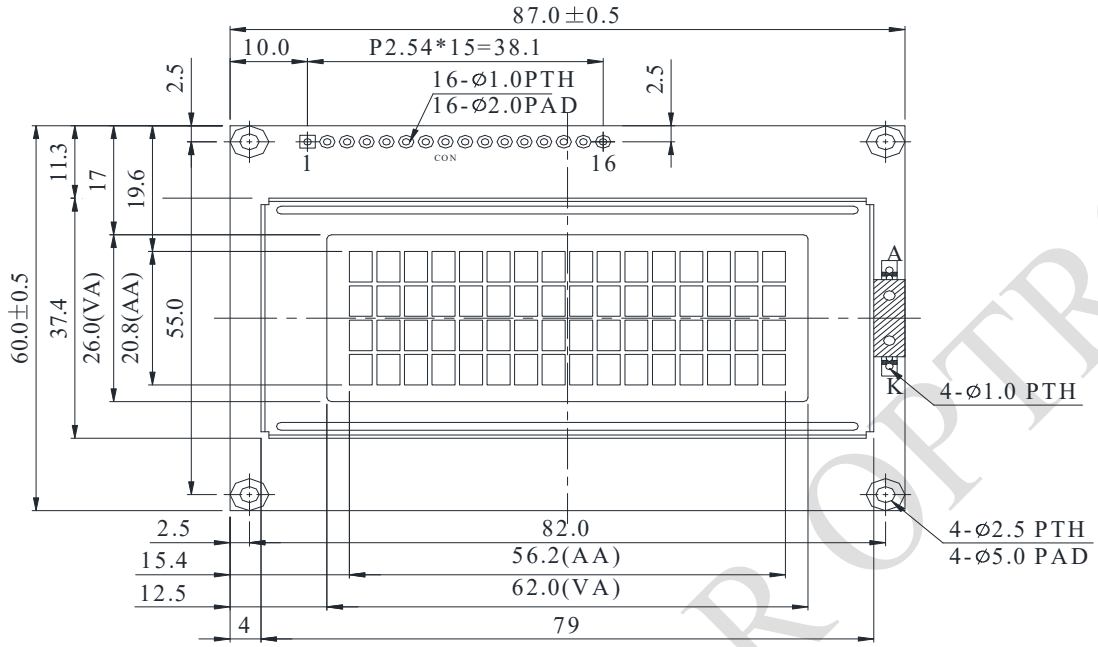

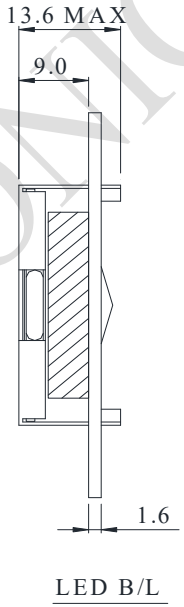

LED B/L

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	Vo
4	RS
5	R/$\overline{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

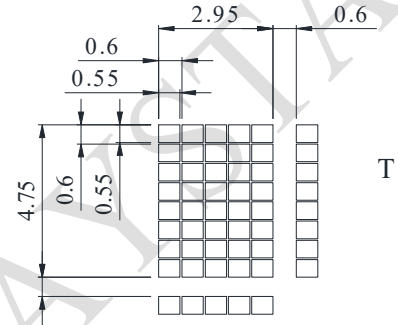

DOT SIZE
SCALE 5/1

The non-specified tolerance of dimension is ±0.3mm.

RAYSTAR OPTRONICS

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_{OP}	-20	–	+70	℃
Storage Temperature	T_{ST}	-30	–	+80	℃
Input Voltage	V_I	V_{SS}	–	V_{DD}	V
Supply Voltage For Logic	V_{DD}-V_{SS}	-0.3	–	7	V
Supply Voltage For LCD	V_{DD}-V_o	-0.3	–	13	V

Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	V_{DD}-V_{SS}	–	4.5	5.0	5.5	V
Supply Voltage For LCD	V_{DD}-V_0	Ta=-20℃	–	–	5.7	V
		Ta=25℃	4.2	4.35	4.5	V
		Ta=70℃	3.7	–	–	V
Input High Volt.	V_{IH}	–	0.7 V_{DD}	–	V_{DD}	V
Input Low Volt.	V_{IL}	–	V_{SS}	–	0.6	V
Output High Volt.	V_{OH}	–	3.9	–	V_{DD}	V
Output Low Volt.	V_{OL}	–	0	–	0.4	V
Supply Current	I_{DD}	V_{DD}=5.0V	1.0	1.2	1.5	mA

RAYSTAR OPTRONICS