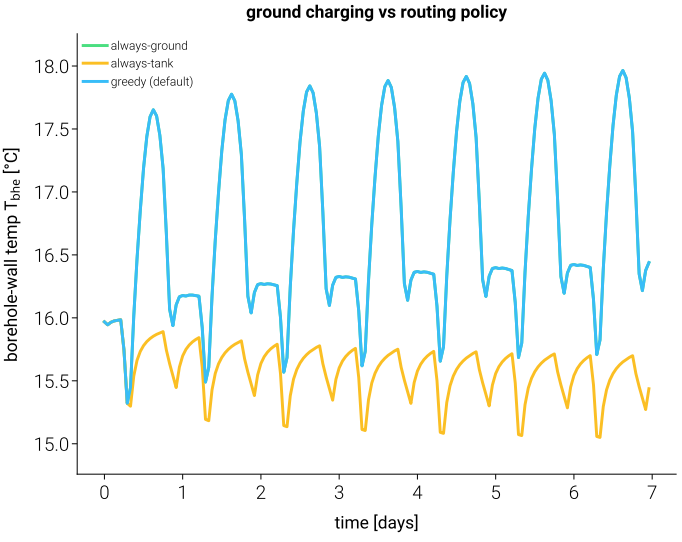
ground charging vs routing policy
always-ground
always-tank
greedy (default)
borehole-wall temp T_{bhe} [°C]
18.0
17.5
17.0
16.5
16.0
15.5
15.0
0
1
2
3
4
5
6
7
time [days]

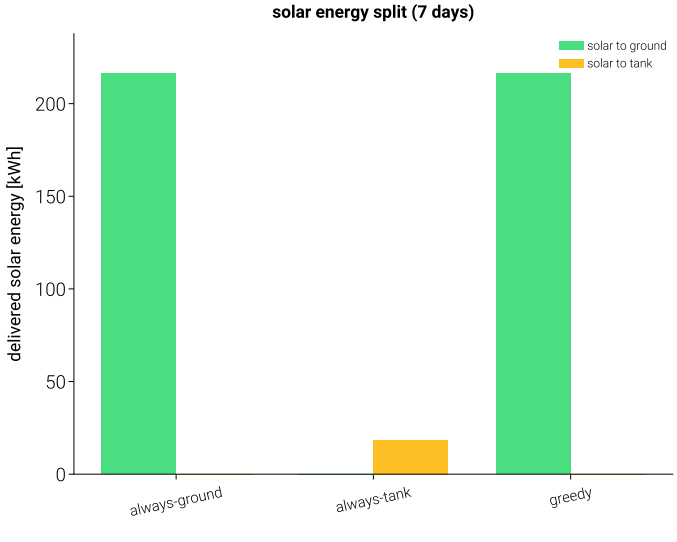
solar energy split (7 days)
solar to ground
solar to tank
delivered solar energy [kWh]
200
150
100
50
0
always-ground
always-tank
greedy