

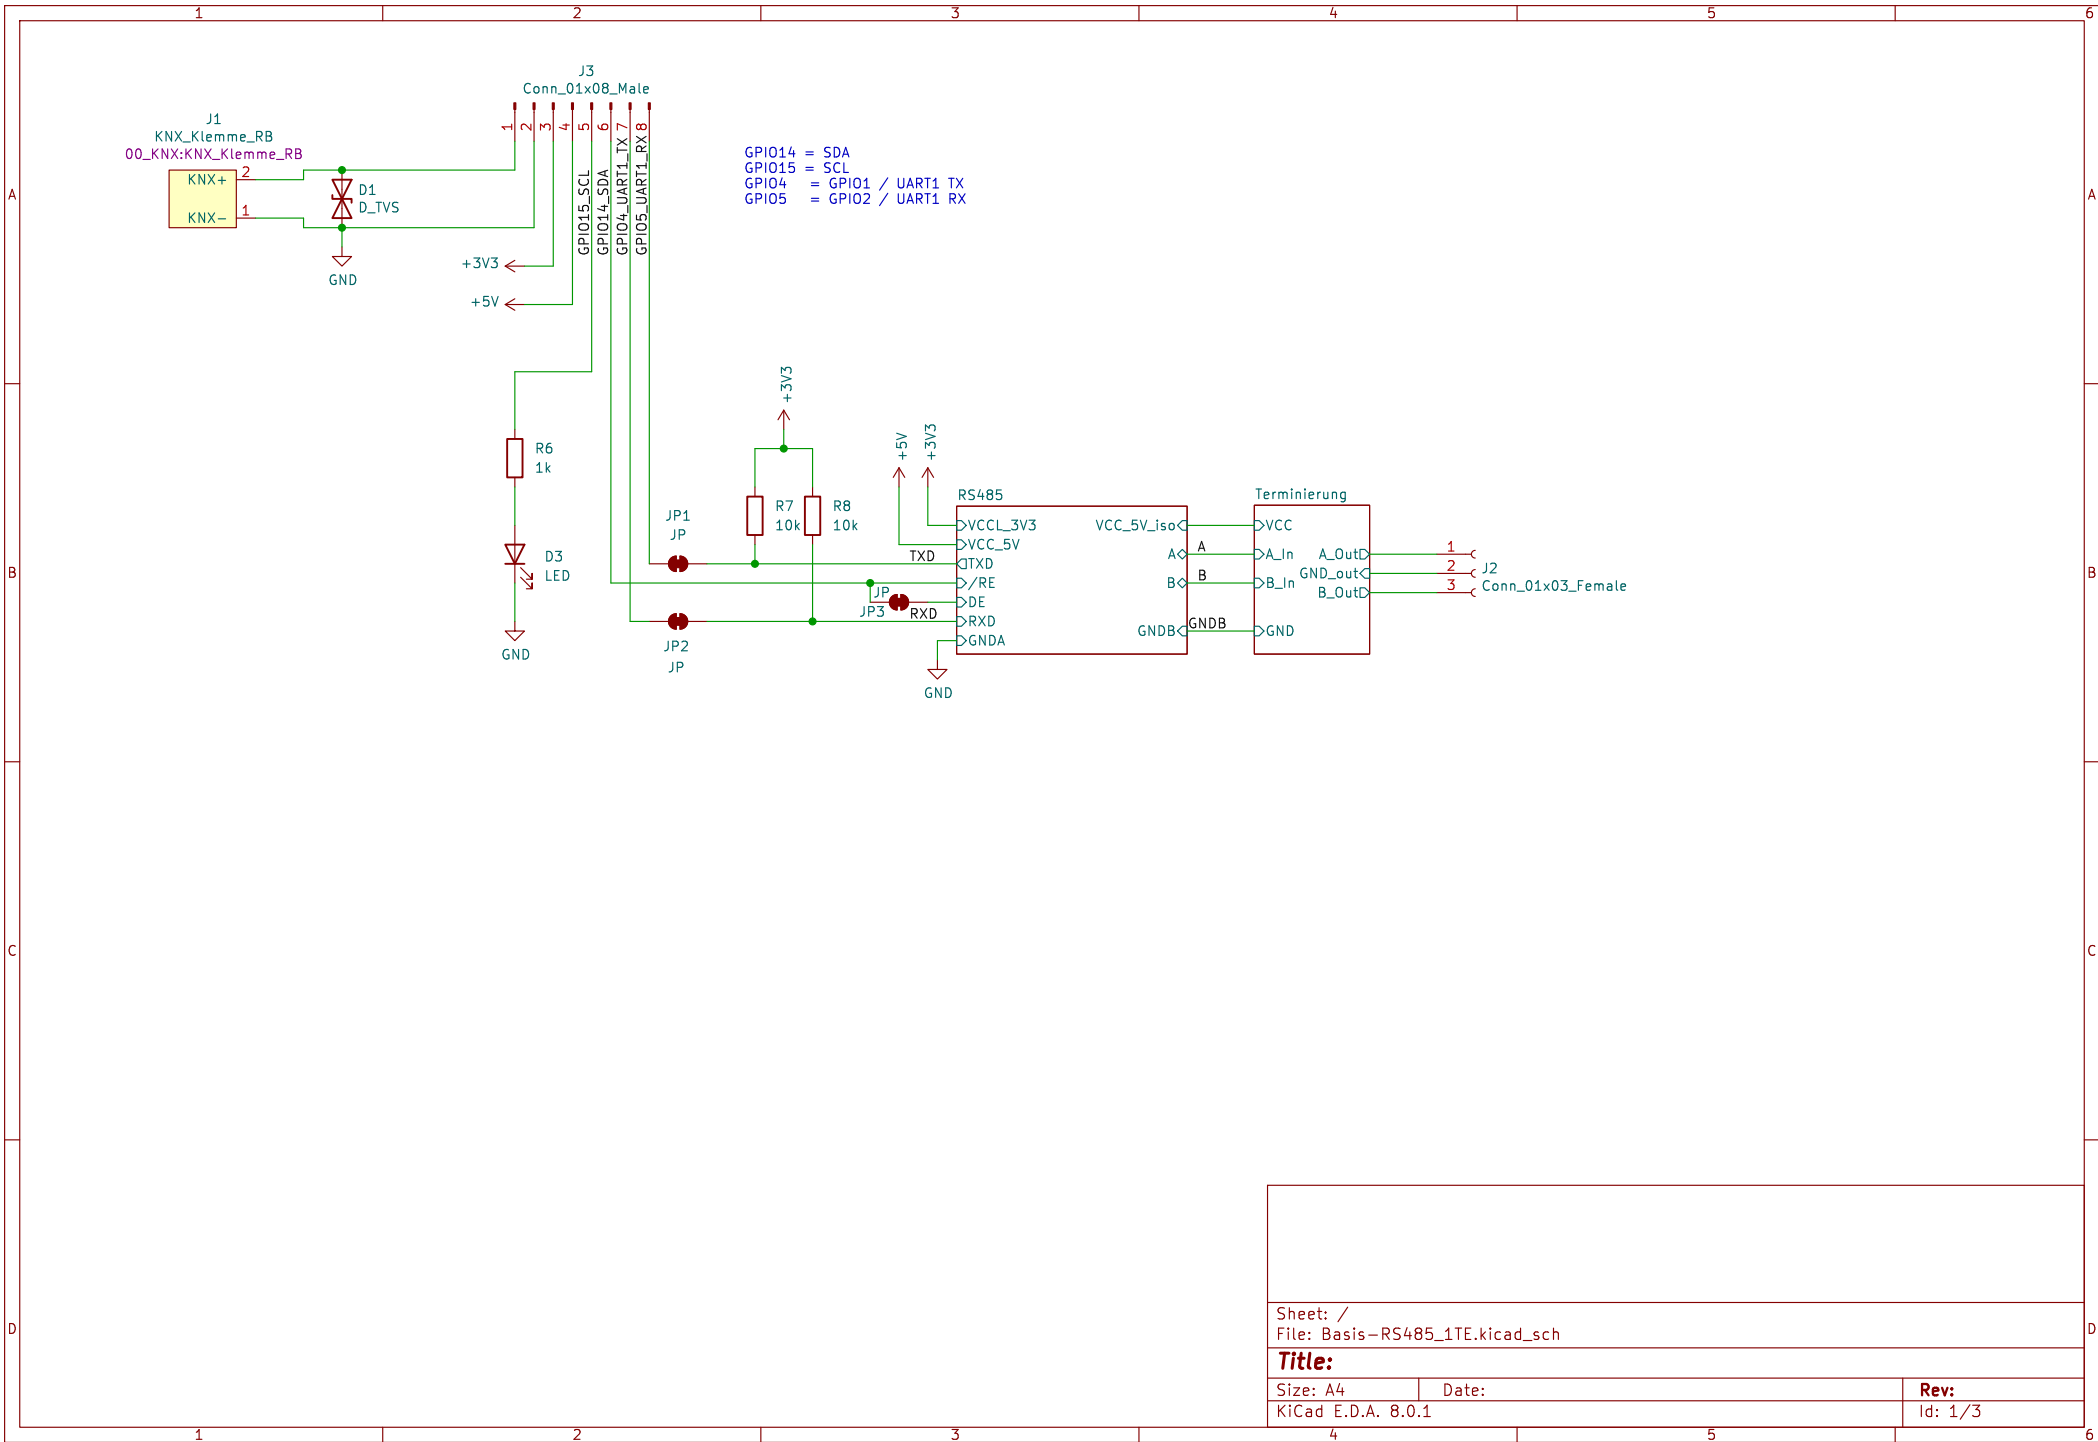


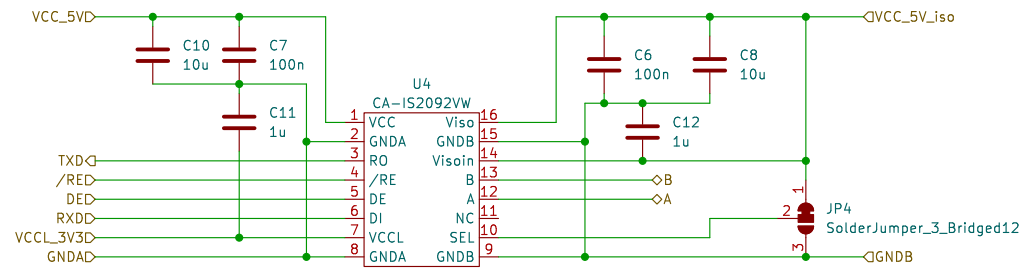

### 10.1. Overview

### 10.1. Overview

The CA-IS2092 family of half-duplex RS-485/RS-422 transceivers commonly used for asynchronous data transmissions. For half-duplex devices, the driver and receiver enable pins allow for the configuration of different operating modes. Because of high peak currents flowing through  $V_{CC}$  and  $V_{DD}$  supplies, bulk capacitance of typical 10 $\mu$ F (or at least 4.7 $\mu$ F) is recommended on both pins. Higher values of bulk capacitors are helpful to reduce noise and ripple further and enhance performance, see Figure 10-1 the typical application circuit. Make sure there is no data transmission during the CA-IS2092X power up.

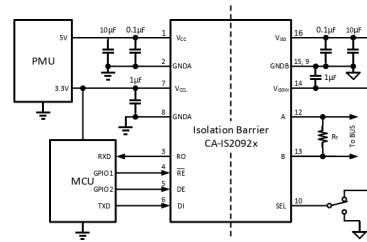


Sheet: /RS485/  
File: RS485\_galv\_DCDC.kicad\_sch

**Title:**

|          |       |
|----------|-------|
| Size: A4 | Date: |
|----------|-------|

KiCad E.D.A. 8.0.1

Rev:  
Id: 2/3

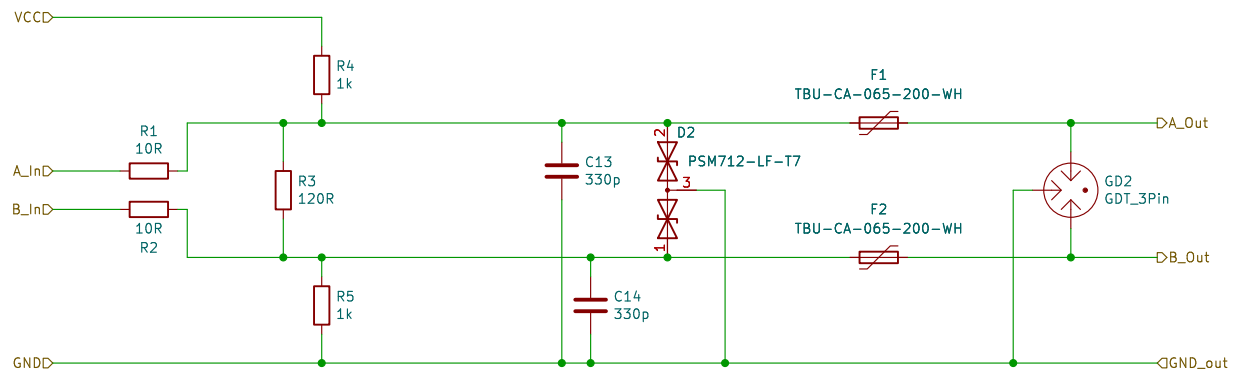

Sheet: /Terminierung/  
File: RS485\_Term.kicad\_sch

**Title:**

Size: A4

Date:

KiCad E.D.A. 8.0.1

**Rev:**

Id: 3/3