

PBD Review Summary (MVP 5-Page)

Engine wall time: 1.07 min

Commercial estimate: 336.0 h

Speedup (estimate ratio): 18817.7x

Drift envelope max: 9.200%

Drift P50/P84/P95 max: 9.200% / 9.200% / 9.200%

IO/LS/CP limits: 1.0% / 1.5% / 1.5%~2.0%

Residual top displacement max: 760.16 mm

Residual drift max: 1.9136%

Cumulative E_diss (system): 6.369e+126 kN·mm

All cases converged: True

Min converged-step ratio: 1.0000


Step tolerance: 1.00e-04

Energy balance relative error (ref): 8.427672e-05

Equilibrium residual ratio (ref): 2.280637e-13

7-GM Drift Envelope

Story-wise drift distribution with IO / LS / CP thresholds

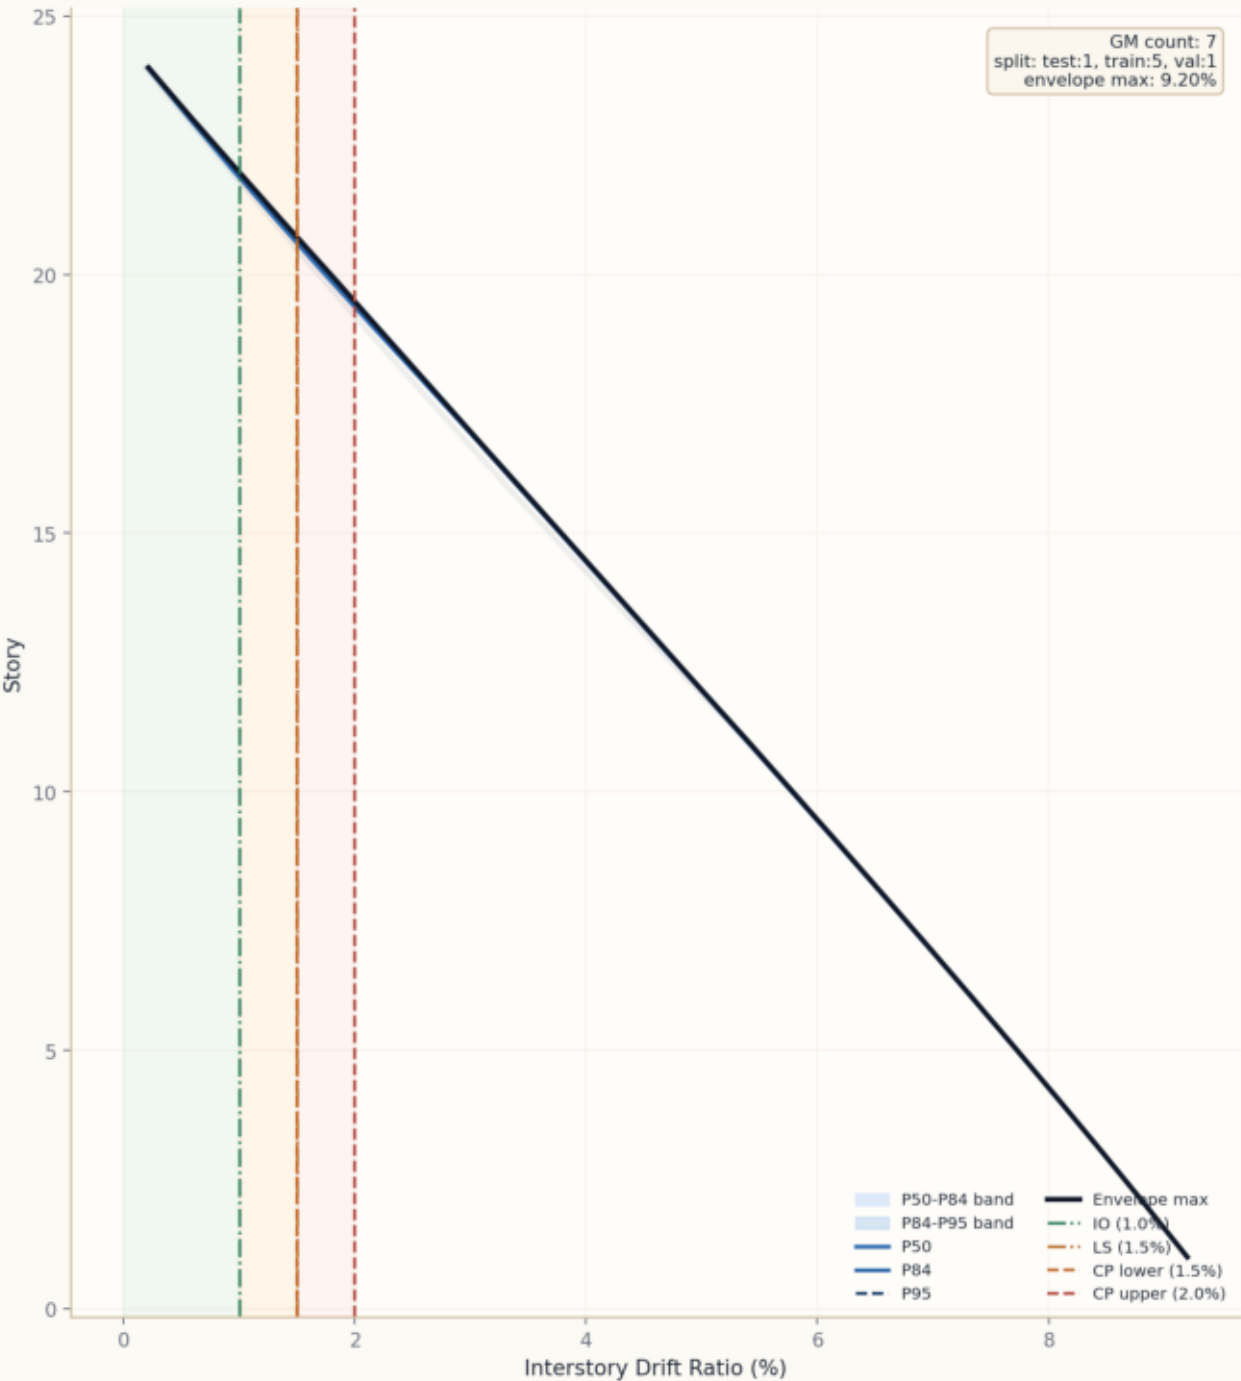


System Hysteresis

Representative core loop and residual-state evidence | opstool_606m_megatall_model-00001


Overflow / unstable regime

Solver instability suspicion

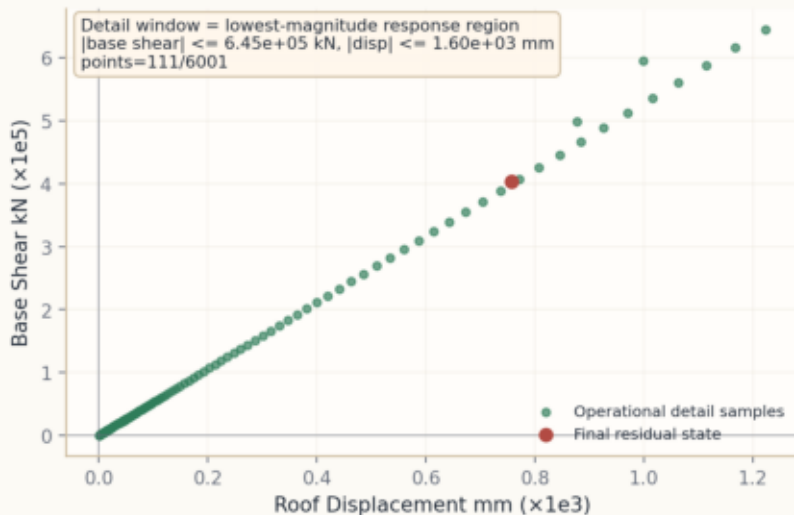


Residual drift: 1.914%
Residual top disp: 757.74 mm
Cumulative E_{diss} : $6.369\text{e}+126$ kN-mm

Overflow regime detected.
Main panel shows only the lowest-magnitude operational window.
Read the right-hand magnitude panel for the full dynamic-range trend.

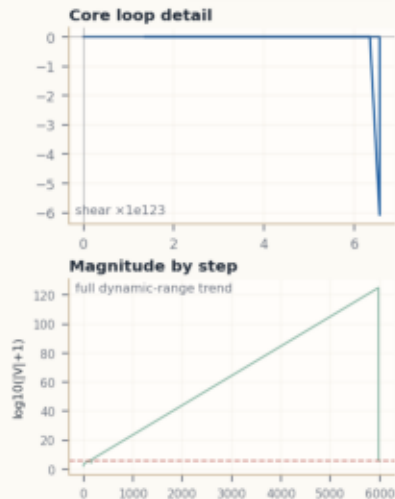

3D Plastic-Hinge Proxy (opstool_606m_megatall_model-00001)

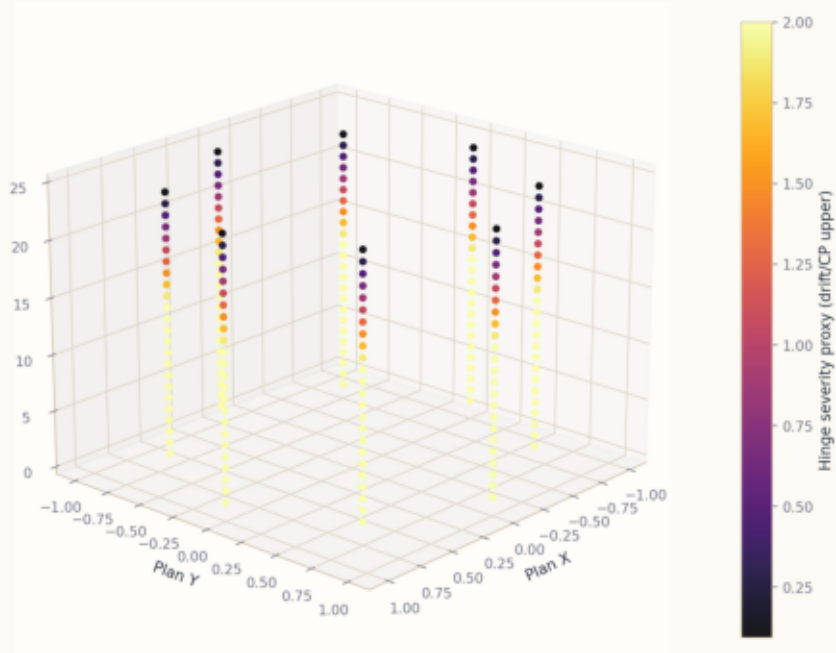


Hinge Count Timeline Proxy (opstool_606m_megatall_model-00001)



Authority (SAC) KPI Summary

Reference benchmark error bands and MAC

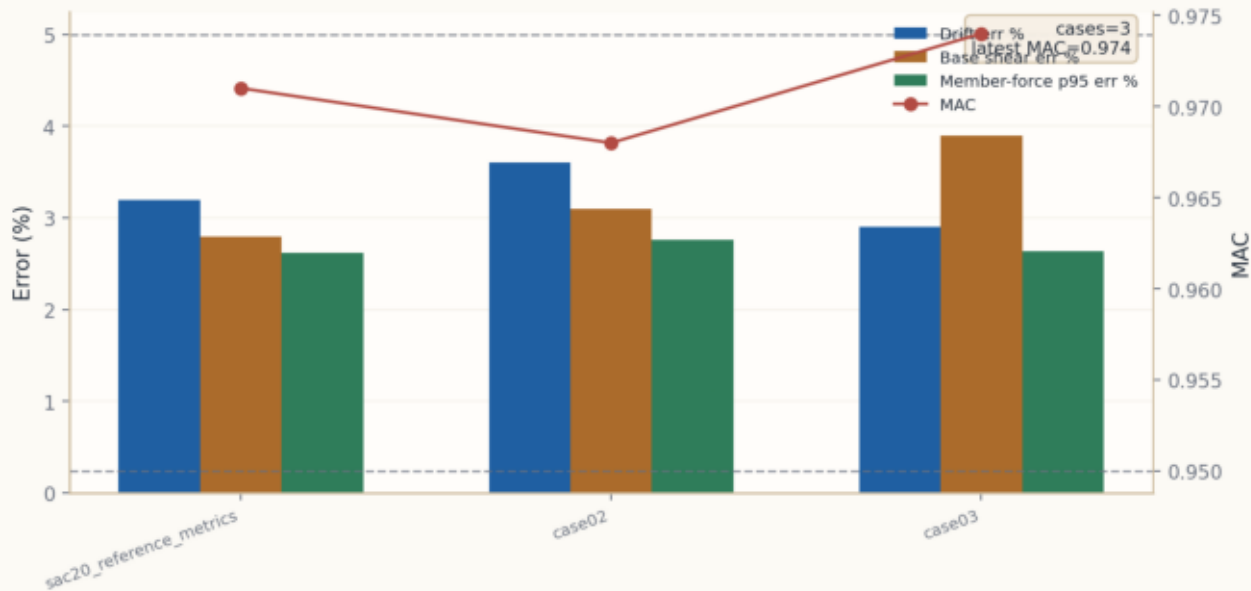

Authority (NHERI) Waveform Overlay

Sensor trace vs engine baseline

