


recommended PCB drilling plan
view: component side



General tolerances:

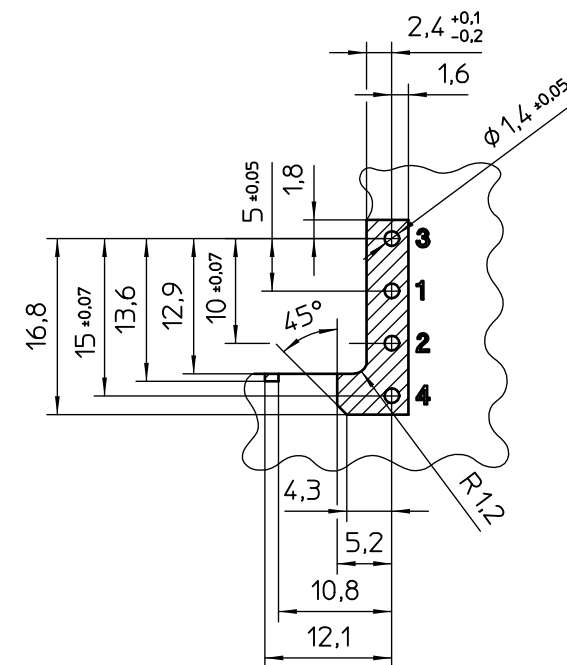

dimensions ≤ 30 : $\pm 0,1/R \pm 0,2/\pm 1^\circ$

dimensions > 30 : $\pm 0,15/R \pm 0,2/\pm 1^\circ$

symmetry: 0,2

General Information

- Simplified representation
- Restricted area
- Document excluded from change process
- CAD Data see Download-Center on www.phoenixcontact.com
- When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
- Linear dimensions [mm]
- Tolerances, apply in a normal climate according to DIN 50014-23/50-2, with about 2% (% by weight) moisture content.

 DIN A3	document-No. / RI 00556587 / 01	date 12.11.2014	scale 2:
	ident.-No. -----	document-type Customer drawing	
page 1 of 1	description MKDSO 2,5/ 4-L		