


recommended PCB drilling plan  
view: component side

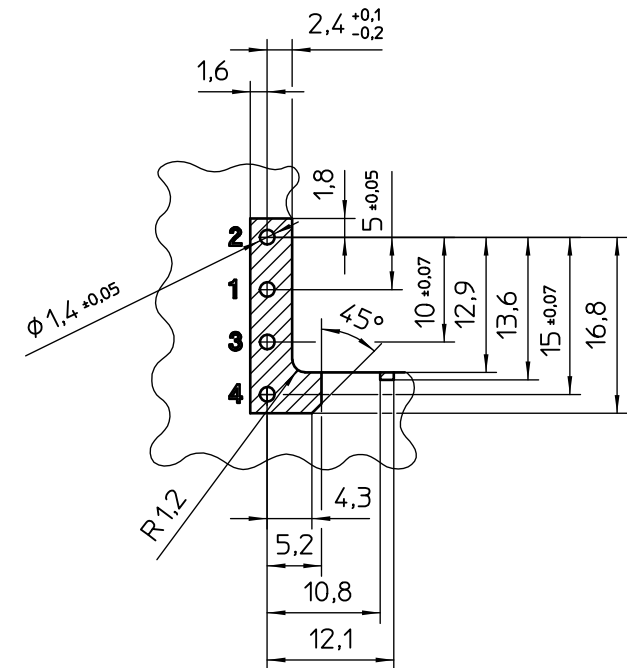

General tolerances:  
dimensions  $\leq 30$ :  $\pm 0,1/R \pm 0,2/\pm 1^\circ$   
dimensions  $> 30$ :  $\pm 0,15/R \pm 0,2/\pm 1^\circ$   
symmetry: 0,2

- General Information
- Simplified representation
  - Restricted area
  - Document excluded from change process
  - CAD Data see Download-Center on [www.phoenixcontact.com](http://www.phoenixcontact.com)
  - When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
  - Linear dimensions [mm]
  - Tolerances, apply in a normal climate according to DIN 50014-23/50-2, with about 2% (% by weight) moisture content.

	document-No. / RI <b>00814578 / 00</b>	date 12.11.2014	scale 2:1
	ident.-No. -----	document-type Customer drawing	
description	MKDSO 2,5/ 4-R		
page 1	of 1		