


recommended PCB drilling plan
view: component side

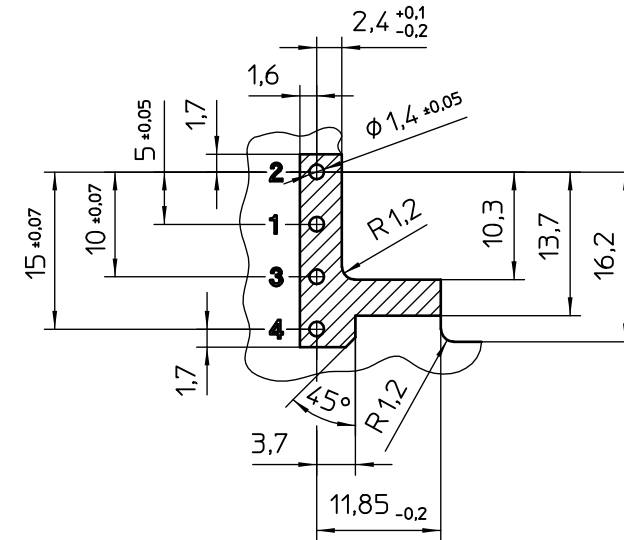

General tolerances:
dimensions ≤ 30 : $\pm 0,1/R \pm 0,2/\pm 1^\circ$
dimensions > 30 : $\pm 0,15/R \pm 0,2/\pm 1^\circ$
symmetry: 0,2

- General Information
- Simplified representation
 - Restricted area
 - Document excluded from change process
 - CAD Data see Download-Center on www.phoenixcontact.com
 - When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
 - Linear dimensions [mm]
 - Tolerances, apply in a normal climate according to DIN 50014-23/50-2, with about 2% (% by weight) moisture content.

	document-No. / RI	date	scale
	00809817 / 01	14.11.2014	2:1
	ident.-No.	document-type	
	-----	Customer drawing	
page 1	of 1	description	
		MSTBO 2.5/ 4-G1R	