

LIGHT 2 HARNESS r03 / DRAFT


Direct Port C wiring for the first Exclusive Compatible proof

Agon Light 2

220 ohm series / 15k pull-ups

Olimex ESP32-P4-DevKit Rev D1


Remaining header contacts

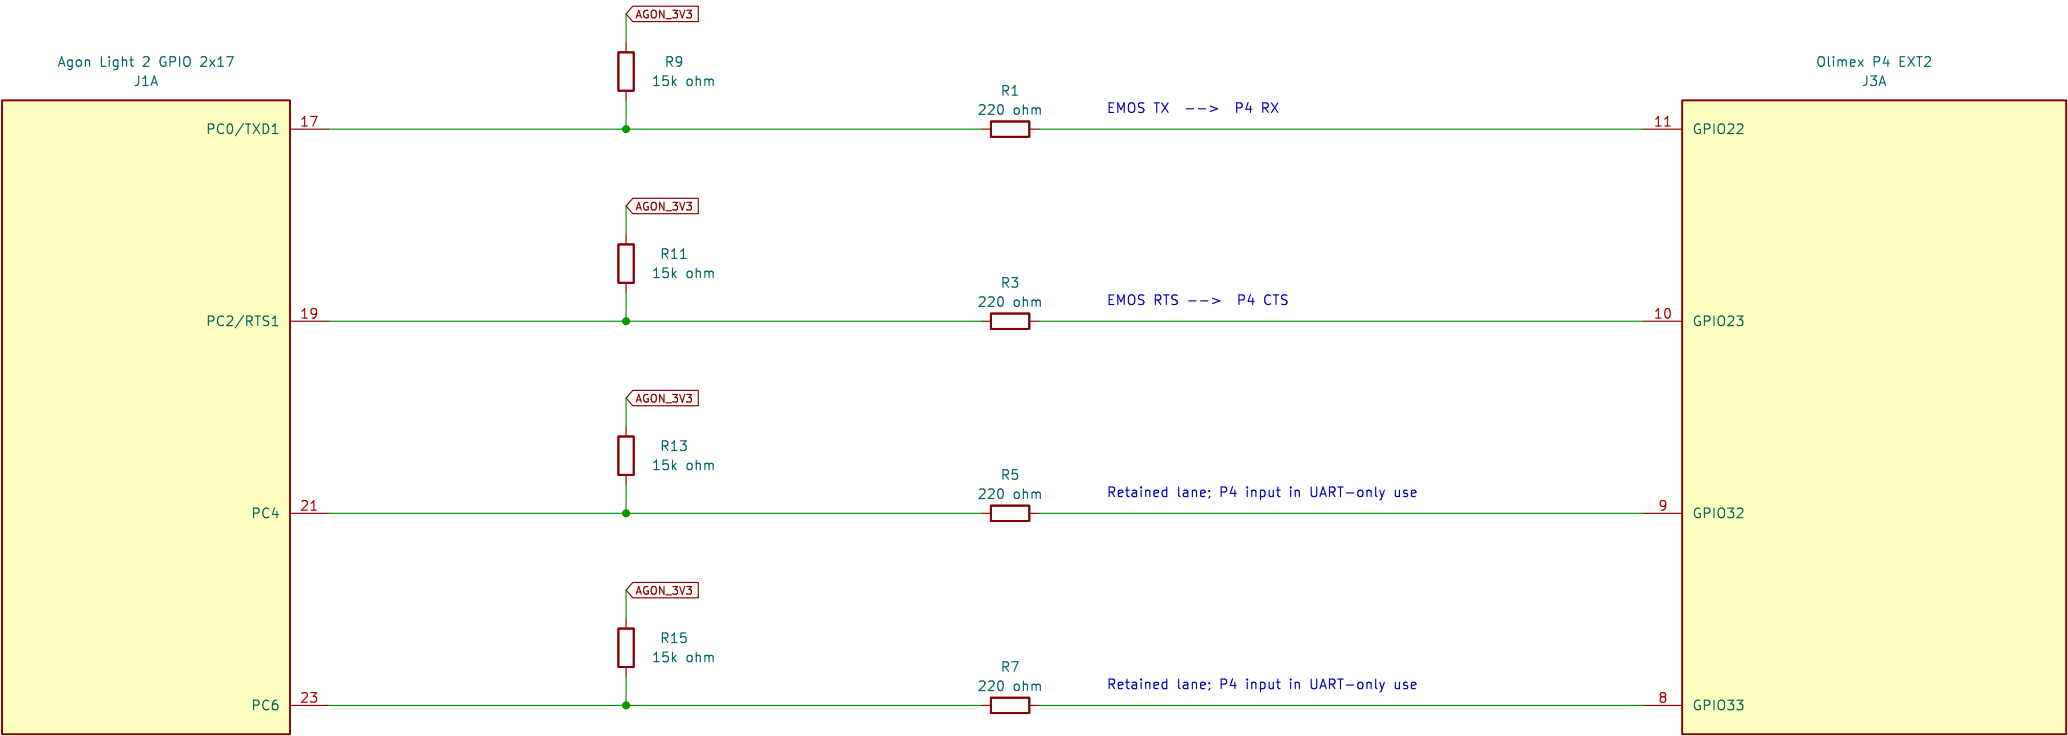

ONBOARD TIMING RETAINED



Onboard VDP VSync -> eZ80 PB1 (existing Agon board trace). Known 60 Hz mode for the first proof; no new P4 timing wire.

PD4 / PD5 / PD7: isolated cable landings. No parallel handshakes, added 10k bias network, or tri-state buffers in this draft.

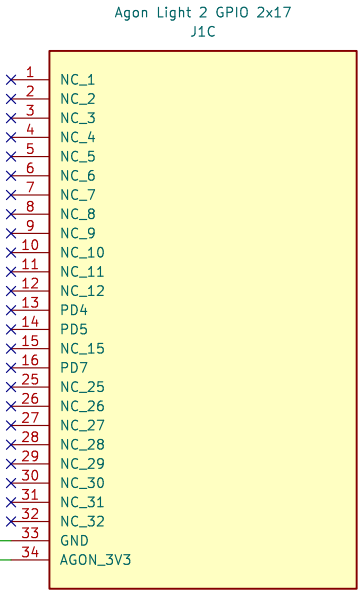

X = no external harness wire.

Board-internal wiring is omitted.

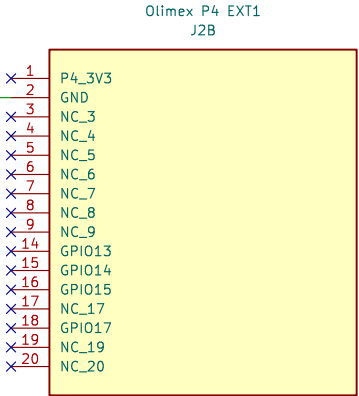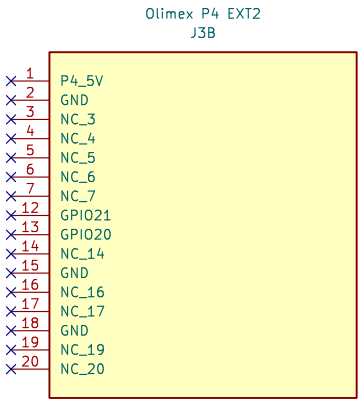

DRAFT / NOT QUALIFIED – see README and HW-002.

Header units are grouped by function; numbers are physical pins. This is an electrical drawing, not a breadboard layout.

Pull-ups: AGON_3V3 only, drawn on the Agon side of each series resistor. P4 positive supplies have no harness connection.

Required common ground: J1.33 to EXT1.2. Confirm the actual connection and point-to-point mapping before treating this as as-built.