EEBus Initiative e.V.
Deutz-Mülheimer-Straße 183
51063 Cologne
GERMANY

Rue d'Arlon 25
1050 Brussels
BELGIUM

Phone: +49 221 / 715 938 - 0
Fax: +49 221 / 715 938 - 99

info@eebus.org
www.eebus.org

District court: Cologne
VR 17275

EEBUS Use Case Specification

Node Identification

Version 1.0.0

Cologne, 2024-03-07

The EEBus concept was developed as part of E-Energy.

Supported by: Federal Ministry of Economics and Technology on the basis of a decision by the German Bundestag

Terms of use for publications of EEBus Initiative e.V.

General information
The specifications, particulars, documents, publications and other information provided by the EEBus Initiative e.V. are solely for general informational purposes. Particularly specifications that have not been submitted to national or international standardisation organisations by EEBus Initiative e.V. (such as DKE/DIN-VDE or IEC/CENELEC/ETSI) are versions that have not yet undergone complete testing and can therefore only be considered as preliminary information. Even versions that have already been published via standardisation organisations can contain errors and will undergo further improvements and updates in future.

Liability
EEBus Initiative e.V. does not assume liability or provide a guarantee for the accuracy, completeness or up-to-date status of any specifications, data, documents, publications or other information provided and particularly for the functionality of any developments based on the above.

Copyright, rights of use and exploitation
The specifications provided are protected by copyright. Parts of the specifications have been submitted to national or international standardisation organisations by EEBus Initiative e.V., such as DKE/DIN-VDE or IEC/CENELEC/ETSI, etc. Furthermore, all rights to use and/or exploit the specifications belong to the EEBus Initiative e.V., Deutz-Mülheimer-Straße 183, 51063 Cologne, Germany and can be used in accordance with the following regulations:

The use of the specifications for informational purposes is allowed. It is therefore permitted to use information evident from the contents of the specifications. In particular, the user is permitted to offer products, developments and/or services based on the specifications.

Any respective use relating to standardisation measures by the user or third parties is prohibited. In fact, the specifications may only be used by EEBus Initiative e.V. for standardisation purposes. The same applies to their use within the framework of alliances and/or cooperations that pursue the aim of determining uniform standards.

Any use not in accordance with the purpose intended by EEBus Initiative e.V. is also prohibited.

Furthermore, it is prohibited to edit, change or falsify the content of the specifications. The dissemination of the specifications in a changed, revised or falsified form is also prohibited. The same applies to the publication of extracts if they distort the literal meaning of the specifications as a whole.

It is prohibited to pass on the specifications to third parties without reference to these rights of use and exploitation.

It is also prohibited to pass on the specifications to third parties without informing them of the authorship or source.

Without the prior consent of EEBus Initiative e.V., all forms of use and exploitation not explicitly stated above are prohibited.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Table of contents

Table of contents 3
List of figures 4
List of tables 4
1 Scope of the document 5
1.1 References 5
1.1.1 EEBUS documents 5
1.1.2 Normative references 5
1.2 Terms and definitions 5
1.3 Requirements 6
1.3.1 Requirements wording 6
1.3.2 Mapping of High-Level requirements 6
2 High-Level description 7
2.1 Introduction 7
2.2 User Story as an example 7
2.3 Actors 8
2.3.1 Identifiable Node 8
2.3.2 Visualization Appliance 8
2.4 Scenarios 8
2.4.1 Scenario 1 - Get manufacturer data 8
2.5 Dependencies to other Use Cases 9
2.6 Assumptions and Prerequisites 9
3 Technical SPINE solution 10
3.1 General rules and information 10
3.1.1 Underlying technology documents 10
3.1.2 Use Case discovery rules 10
3.1.3 Rules for "Content of Specialization..." tables and "Content of Function..." tables 10
3.1.4 Rules for "Feature Types and Functions..." tables 20
3.1.5 "Actor ... overview" diagram rules 20
3.1.6 Specializations 21
3.1.7 Order of messages within the sequence diagrams 22
3.1.8 Further information and rules 22
3.2 Actors 23
3.2.1 Identifiable Node 23
3.2.2 Visualization Appliance 25
3.3 Pre-Scenario communication 27
3.3.1 General information 27
3.3.2 Detailed discovery 28
3.3.3 Binding 30
3.3.4 Subscription 30
3.3.5 Dynamic behaviour 31
3.4 Scenarios 31
3.4.1 Scenario 1 - Get manufacturer data 31
Annex A - SPINE best practice 34
A.1 Sequence Diagrams 34
A.1.1 Pre-Scenario communication 34

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

A.1.2 Initial Scenario communication 34
A.1.3 Runtime Scenario communication 35
A.2 XML Examples 35
A.2.1 Pre-Scenario communication 35
A.2.2 Initial Scenario Communication 40
A.2.3 Runtime Scenario Communication 41

List of figures

Figure 1: High-Level Use Case functionality overview 7
Figure 2: Scenario overview 8
Figure 3: Actor overview example 21
Figure 4: Actor "Identifiable Node" overview 23
Figure 5: Actor "Visualization Appliance" overview 26
Figure 6: Pre-Scenario communication - Detailed discovery sequence diagram 29
Figure 7: Pre-Scenario communication - Binding sequence diagram 30
Figure 8: Pre-Scenario communication - Subscription sequence diagram 31
Figure 9: Scenario 1 - Initial Scenario communication sequence diagram 32
Figure 10: Scenario 1 - Runtime Scenario notifications 33
Figure 11: Best practice - Pre-Scenario communication 34
Figure 12: Best practice - Initial Scenario communication 34
Figure 13: Best practice - Runtime Scenario communication - Notifications 35

List of tables

Table 1: Scenario implementation requirements for Actors 8
Table 2: Scenario 1 – Manufacturer data 9
Table 3: Presence indication description 11
Table 4: Example table for cardinality indications on Elements and list items 13
Table 5: Content of an example Specialization 17
Table 6: Presence indication of Feature Types and Functions support 20
Table 7: Specialization support for Actor Identifiable Node 24
Table 8: Feature Types and Functions used within this Use Case by the Actor Identifiable Node 24
Table 9: Content of Function "deviceClassificationManufacturerData" at Actor Identifiable Node 25
Table 10: Specialization support for Actor Visualization Appliance 27
Table 11: Content of Specialization "DeviceClassification_NodeIdentification" at Actor Visualization Appliance 27
Table 12: Initial Scenario communication content references for reply messages of Scenario 1 32
Table 13: Runtime Scenario communication content references for notify messages of Scenario 1 33

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

1 Scope of the document

This document describes the Use Case "Node Identification" (short-name: NID). Chapter 2 specifies the High-Level Use Case. Chapter 3 details the technical solution for SPINE for this Use Case. Within this document, a top-down approach is used to derive the requirements for the technical solution from the High-Level description. In Annex A, the best practice message flow as well as example XMLs are provided for the technical SPINE solution.

1.1 References

1.1.1 EEBUS documents

[ProtocolSpecification]	EEBus_SPINE_TS_ProtocolSpecification.pdf
[ResourceSpecification]	EEBus_SPINE_TS_ResourceSpecification.pdf
[SHIP]	EEBus_SHIP_TS_Specification_v1.0.1.pdf

1.1.2 Normative references

[RFC2119]	IETF RFC 2119: 1997, Key words for use in RFCs to indicate requirement levels Please see section 1.3.1 for details.

1.2 Terms and definitions

Actor
An Actor models a role within a Use Case definition (e.g. an energy manager or an electric vehicle).

NID
Node Identification (short-name of this Use Case)

Node
A logical or physical appliance or component with a particular functionality.

Scenario
Part of a Use Case. Splitting a Use Case into Scenarios helps readers understand the Use Case more quickly. Some Scenarios are mandatory for a Use Case, whereas others may be recommended or optional.

Specialization
Reusable data collection for a specific functionality.

SPINE
Smart Premises Interoperable Neutral-message Exchange: Technical Specification of EEBus Initiative e.V.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

1.3 Requirements

1.3.1 Requirements wording

The following keywords are used:

- SHALL
- SHALL NOT
- SHOULD
- SHOULD NOT
- MAY

Note: They apply only if written in capital letters.

For the meaning of the keywords, please refer to [RFC2119].

1.3.2 Mapping of High-Level requirements

Within the High-Level Use Case description, the following abbreviation is used:

[NID-xyz]

e.g.: [NID-007]

The abbreviation is used to mark High-Level requirements or rules of this Use Case with a unique number xyz. These requirements are referenced throughout the technical solution to show how each High-Level requirement is realized in the technical part.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

2 High-Level description

2.1 Introduction

This Use Case aims at identifying an appliance using basic manufacturer information (e.g., the device name or serial number). This complements other Use Cases as it permits access to human readable information on the identity of this appliance.

In a building there can be several appliances from different vendors that are able to communicate with each other and can perform specific Use Cases. The identity of an appliance may be used by a user to associate priorities for the execution of Use Cases. It can also be used if there is a need to configure which appliances should execute a particular Use Case with each other and which should not.

In general, an appliance may be composed of (or represent) several components with respective Use Cases and individual identities. Therefore, this Use Case is not restricted to physical appliances. Instead, it defines the Actor Identifiable Node as Actor that can provide information about its identity. This permits to implement several distinct Identifiable Node Actors for a given appliance, each representing a different identifiable component. An Actor Visualization Appliance can then retrieve and display the respective identity.

A possible application might be an energy management system (as Actor Visualization Appliance in Figure 1) that offers a user to assign priorities to particular appliances (like a heat pump) in order to execute energy-management-related Use Cases according to the user's preference.

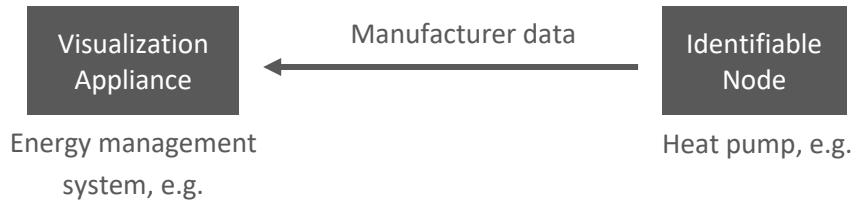


Figure 1: High-Level Use Case functionality overview

Added value:

With the Use Case "Node Identification" a user can more easily determine and verify the identity of an appliance via the respective communication technology.

2.2 User Story as an example

The owner of a house wants to verify at the energy management system which appliances it does control.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

2.3 Actors

2.3.1 Identifiable Node

The Actor Identifiable Node is a logical or physical node (or unit) providing manufacturer data that permits identifying the node.

2.3.2 Visualization Appliance

The Actor Visualization Appliance retrieves the manufacturer data of Actor Identifiable Node and presents it to a user.

2.4 Scenarios

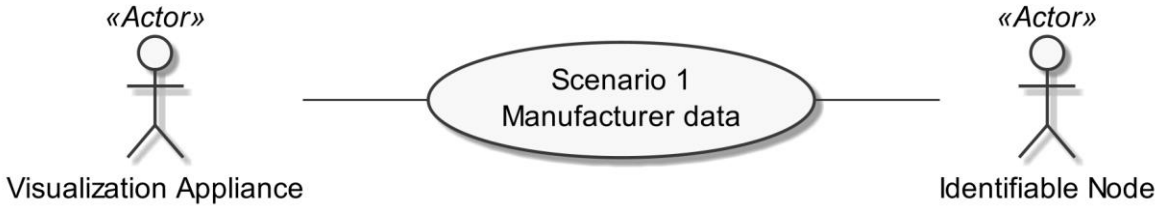


Figure 2: Scenario overview

Scenario number	Scenario name	Visualization Appliance	Identifiable Node
1	Get manufacturer data	M	M

Table 1: Scenario implementation requirements for Actors

2.4.1 Scenario 1 - Get manufacturer data

2.4.1.1 Description

In this Scenario, Actor Identifiable Node provides its manufacturer data as described in Table 2.

Data point name	Data point description [High-Level requirement]	Support indication	High-Level requirement
Device name	Name of the node as indicated on the housing or manual.	M	[NID-001]
Brand name	Name of the brand of the node.	M	[NID-002]
Serial number	Unique serial number of the node. (*1)	M	[NID-003]
Vendor name	Name of the vendor of the node.	O	[NID-004]
Device code	Device code of the node to uniquely identify the exact model.	O	[NID-005]

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Node identification	Readable string to uniquely identify the node. (*1)	O	[NID-006]

Table 2: Scenario 1 – Manufacturer data

(*1) On "Node identification" vs. "Serial number": Serial numbers may only be unique for devices of a given manufacturer. The "Node identification", on the other hand, SHALL be unique across all nodes that are attached to Actor Visualization Appliance.

2.4.1.2 Conditions

Triggering Event:
This Scenario is triggered by Actor Visualization Appliance to get manufacturer data of Actor Identifiable Node.

Pre-condition:
The Actor Visualization Appliance has no or "old" manufacturer data of Actor Identifiable Node.

Post-condition:
In case of success, the Actor Visualization Appliance received the manufacturer data of Actor Identifiable Node.

2.5 Dependencies to other Use Cases

None.

2.6 Assumptions and Prerequisites

None.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

3 Technical SPINE solution

3.1 General rules and information

3.1.1 Underlying technology documents

This technical solution relies on the SPINE Resources Specification version 1.1.0 [ResourceSpecification].

For interoperable connectivity this technical solution relies on:

- SPINE Protocol Specification version 1.1.0 [ProtocolSpecification] as application protocol.
- SHIP Specification version 1.0.1 [SHIP] as transport protocol.

3.1.2 Use Case discovery rules

Use Case discovery SHALL be supported by each Actor and the following rules SHALL apply:

- The string content for the Element "nodeManagementUseCaseData. useCaseInformation. useCaseSupport. useCaseName" within the Use Case discovery (please refer to [ProtocolSpecification]) SHALL be "nodeIdentification". The string content SHALL only be defined by this Use Case (regardless of the Use Case version).
- The string content of the Element "nodeManagementUseCaseData. useCaseInformation. actor" within the Use Case discovery (please refer to [ProtocolSpecification]) SHALL be set to the according value stated within the corresponding Actor's section.
- An Actor A that is implemented to support this Use Case specification SHALL set the Element "nodeManagementUseCaseData. useCaseInformation. useCaseSupport. useCaseVersion" within the Use Case discovery (please refer to [ProtocolSpecification]) to "1.0.0".
- If an Actor A supports multiple versions of this Use Case with the same major version number, only the highest one SHOULD be set within the Use Case discovery.
- If an Actor A finds a proper counterpart Actor B for this Use Case that supports multiple versions of this Use Case with the same major version number as supported by Actor A, the Actor A SHOULD evaluate from these versions of Actor B only the highest version number.
- If an Actor A supports multiple versions of this Use Case with different major version numbers, for each major version number only the highest version number SHOULD be set within the Use Case discovery.
- If an Actor A finds a proper counterpart Actor B for this Use Case that supports only versions with a major version number not implemented by Actor A, it still might be possible to run the Use Case or parts of the Use Case. Therefore, the Actor A should try to evaluate the Actor B as a valid partner for this Use Case.

3.1.3 Rules for "Content of Specialization..." tables and "Content of Function..." tables

3.1.3.1 General presence indication definitions

Abbreviations for the presence indication of Elements listed in the tables are defined as follows:

Abbreviation	Meaning	Link to requirement keywords

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

M	Mandatory	SHALL
R	Recommended	SHOULD
O	Optional	MAY

Table 3: Presence indication description

An Actor MAY support Elements that are not listed in the tables. However, another Actor MAY ignore these Elements.

The presence indications "M", "R" and "O" are always meant relative to the respective parent Element. I.e. if a parent Element is optional ("O") and a child is mandatory ("M") the child Element can only be present if the parent Element is present as well.

Note: The indications and the aforementioned rules apply for "complete messages" (so-called "full function exchange", please refer to [ProtocolSpecification]). In contrast, the so-called "restricted function exchange" is designed to permit exchange of specific excerpts of data, i.e. fewer Elements than potentially available from the data owner (partially even not all "mandatory" Elements).

3.1.3.2 Presence indications for "Content of Specialization..." tables

This section only defines rules for the client side.

Elements that are marked with "M" SHALL be supported by the client in case of readable as well as writeable data. This Element may be optional on the server side.

The following applies for readable data that is exchanged in a "read/reply" or "notify" operation:

- "R" means that the data SHOULD be supported by the client. In other words: If the server responds with the according Element, the client SHOULD be able to interpret the according Elements.
- "O" means that the data MAY be supported by the client. In other words: If the server responds with the according Element, the client MAY be able to interpret the according Elements.

The following applies for writeable data that is exchanged in a "write" operation:

- "R" means that the data SHOULD be written by the client.
- "O" means that the data MAY be written by the client.
- "F" means that the data SHALL NOT be written by the client.

The following applies for Elements that are not listed in the Actor section:

- In case of a received "reply" message: The client MAY ignore the Element.
- In case of a "write" operation to be created: The client MAY set the Element but SHALL consider that the server may ignore the Element.
- In case of a received "notify" message: The client MAY ignore the Element.

M, R or O may be combined with the suffix "(event)" to express that a supported Element or value only has to be supported during a certain event and hence does not need to be present at all times. If the event is not active the Element may be omitted or another value may be set. In most cases a High-Level requirement reference for the event is given in the rules column.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

In some cases, an Element may have a double presence indication, separated by a comma. Examples:

- M, O
- M \W, O \W

The description (rules) of the Element details in such a case the presence requirement. A typical example is a list-based Element where the "first" (or "last") Element has a different presence requirement than the other list Elements.

3.1.3.3 Presence indications for "Content of Function..." tables

This section only defines rules for the server side.

Elements that are marked with "M" SHALL be supported by the server in case of readable as well as writeable data. In case of writeable data (marked with "M \W") the server does not need to set the Element, because the Element is set only by the client.

The following applies for readable data that is exchanged in a "read/reply" or "notify" operation:

- "R" means that the data SHOULD be provided by the server.
- "O" means that the data MAY be provided by the server.
- "F" means that the data SHALL NOT be provided by the server.

The following applies for writeable data that is exchanged in a "write" operation:

- "R" means that the data SHOULD be supported. In other words: If the client writes the Element, the server SHOULD accept those messages and the contained Elements.
- "O" means that the data MAY be supported. In other words: If the client writes the Element, the server MAY accept those messages and the contained Elements.

The following applies for Elements that are not listed in the Actor section:

- In case of a received "read" request: The according Element MAY be set in the reply.
- In case of a received "write" operation: The server MAY ignore the Element.
- In case of a "notify" operation to be created: The server MAY set the Element.

Note: The server will only accept write operations if the result fulfils the server Function requirements (permitted values, e.g.). Write operations on Elements that are not writeable MAY result in an error message.

M, R or O may be combined with the suffix "(event)" to express that a supported Element or value only has to be supported during a certain event and hence does not need to be present at all times. If the event is not active the Element may be omitted or another value may be set. In most cases a High-Level requirement reference for the event is given in the rules column.

In some cases, an Element may have a double presence indication, separated by a comma. Examples:

- M, O
- M \W, O \W

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

The description (rules) of the Element details in such a case the presence requirement. A typical example is a list-based Element where the "first" (or "last") Element has a different presence requirement than the other list Elements.

3.1.3.4 Cardinality indications on Elements and list items

A cardinality indication on an Element or list item expresses constraints on the number of occurrences of a given Element or data set. In this section we use "X" as representation for such an Element or data set. Furthermore, "a" and "b" represent constraints. The following rules apply for the occurrence of "X" and its content related to a specific Scenario (see note underneath the list):

1. X
   No cardinality indication.
2. X (a..b)
   This means "X" SHALL occur at least "a" times and at maximum "b" times.
3. X (a..)
   This means "X" SHALL occur at least "a" times and MAY occur more than "a" times.
4. X (..b)
   This means "X" SHALL occur at maximum "b" times and MAY occur less than "b" times (even zero occurrences are permissive).

Note: These rules apply only under consideration of presence indications and with regards to the given Scenario or Function definition for this Use Case.

The following table is an example to explain this for two different placements.

Scenario [{...}]: M/R/O [\W][\C]	**Element**	**Value**	**[High-Level Mapping] Element and value rules**
...	...		...
2: M \W	xFeatureType. xListData. xData. (1..3)		
2: M \W	xId	<*#(1..)>	PRIMARY IDENTIFIER
2: M \W	timePeriod		...
2: M \W	timePeriod. startTime	<xs:duration>	
2: M \W	xSlot. (1..)		
2: M \W	xSlot. xSlotId		...
2: M \W	xSlot. duration	<xs:duration>	...
...	...	...	...

Table 4: Example table for cardinality indications on Elements and list items

The field

xFeatureType. xListData. xData. (1..3)

introduces a data pattern (required Elements and values) for "xData" instances used for Scenario 2. The field itself specifies that such an "xData" instance SHALL occur at least 1 time and at maximum 3

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

times within "xListData" of Feature Type "xFeatureType". However, this constraint holds only for Scenario 2 and only if such "xData" are required. In this case, they are required, as the left field

2: M \W

denotes that this data set is mandatory for Scenario 2.

The field

xSlot. (1..)

expresses that the Element "xSlot" SHALL occur at least one time within its "xData", but MAY occur more than one time.

For the expression "<*#(1..)>" of Element "xId" please see section 3.1.3.6.

The remaining fields do not have an explicit cardinality indication.

Note: Cardinality expressions are also used within placeholder expressions as defined in section 3.1.3.6. In many cases such placeholder expressions define the number of required or permitted Elements or list items as they explicitly define how many different values for a given Identifier are required or permitted for a given Scenario.

3.1.3.5 Writability and changeability indication

In the same column where the presence indications are denoted, a mark is used to distinguish between writeable, changeable or readable Elements:

- Elements that are marked with "\W" are written by a client and SHALL be writeable at the server according to their presence indications. The client is not obliged to read the according data. Received notifications do not need to be evaluated.
- Elements that are marked with "\C" are changed by a client and SHALL be changeable at the server according to their presence indications. The client is not obliged to read the according data. Received notifications do not need to be evaluated.
- Elements that are marked with "\RW" are read and written by a client and SHALL be writeable and provided by the server according to their presence indications. Received notifications SHALL be evaluated according to their presence indications.
- Elements that are marked with "\RC" are read and changed by a client and SHALL be changeable and provided by the server according to their presence indications. Received notifications SHALL be evaluated according to their presence indications.
- Elements that are not marked are only read by a client and SHALL be provided by the server according to their presence indications. Received notifications SHALL be evaluated according to their presence indications.

"Writeable" means that the Element and its value may be written by a client. This includes the possibility to modify (if the Element is already present), create (if the Element is not present yet), and delete the Element. The server SHALL adjust its Function according to the received "write" operation (unless the server cannot accept the "write" operation according to section 3.1.3.3).

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

"Changeable" means that the Element's value may be changed by a client. If the Element is not present at the resource before, it probably **cannot** be created by the client via the "write" operation. In this case the server MAY decline such a message.

Note: "\W" includes "\C" already.

Note: Depending on the resource a client might need to request a proper binding before the server accepts a "write" operation.

3.1.3.6 "Value" placeholders

3.1.3.6.1 Introduction

Specializations may use placeholders to model relations between different Elements or even list items of different Functions. The main purpose is to declare which Identifier values relate to each other. As a Use Case does not prescribe specific values to be used for a given Identifier, a placeholder like "<x1>" can be used in "Value" columns to express the intended relations.

There are two styles to identify a placeholder that can be referenced:

1. <xM>
2. <xM#S>

where

1. "x" is any alphabetical prefix like "m", "t", "ec", "cc", etc.
2. "M" is a (major) number like "1", "2", "15", etc.
3. "S" is a sub-number like "1", "7", "10", etc.

Examples for the first style are "<ec1>", "<z12>". Examples for the second style are "<p4#2>", "<m22#3>". For a given placeholder, only one of the styles can be used.

In addition, there are also styles for placeholders that do not need to be referenced:

1. <*>
2. <*#S>

The second style is only used with so-called cardinality expressions.

3.1.3.6.2 Uniqueness of placeholders

A given placeholder <xM> or <xM#S> represents the same value throughout a given Use Case specification for a given set of its parent Identifier values. This shall be explained in a brief example:

We assume a list item with PRIMARY IDENTIFIER "pId". It also has a SUB IDENTIFIER "sId" with placeholder "<s1>". Then, each occurrence of "<s1>" represents the same value for a given value of pId. This means that "<s1>" of a list item with pId=1 can differ from "<s1>" of a list item with pId=2. But it also means that "<s1>" represents the same value in all list items with pId=1.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Note: Typically, parent Identifiers like "pId" will also be expressed with a placeholder like "<p5>", e.g. In this case, the uniqueness rule applies for "<p5>" likewise.

Note: The uniqueness also applies for placeholders used as FOREIGN IDENTIFIER.

3.1.3.6.3 Placeholder expressions with cardinalities

For some Identifiers, more than one placeholder is needed. Several notations are used for this purpose, which make use of cardinality expressions. The general notation is as follows:

1. <xM#(a..b)>

This is equivalent to this explicit definition:

> At least a and at maximum b placeholders of this list: <xM#1> <xM#2> ... <xM#b>

This means that the implementation of a given Use Case (or Scenario) requires a minimum of "a" distinct values of the respective Identifier. In total, there can be up to "b" distinct values of the respective Identifier.

Additionally, the following notations may occur:

2. <xM#(a..)>
   This is equivalent to "<xM#(a..b)>" with "b" equal to infinity.
3. <xM#(..b)>
   This is equivalent to "<xM#(a..b)>" with "a" equal to zero.

"<xM#(a..)>" has only a lower bound of "a" distinct values, but no upper bound. "<xM#(..b)>", on the other hand, expresses that the Identifier may not be required at all, but it is permitted to have up to "b" distinct values.

Similarly, the cardinality can be used for placeholders that are not referenced, i.e. <*#(a..b)> etc.

Note: The cardinality does NOT express which of the sub-numbers have to be used! I.e., it does NOT mean that the Identifiers <xM#1> ... <xM#a> are always used and just those with larger sub-numbers (<xM#a+1> ... <xM#b>) are optional. If, for instance, a placeholder expression "<xM#(3..5)>" is given, it may well happen that an implementation makes use of <xM#2>, <xM#4>, and <xM#5> (i.e., it does NOT use <xM#1>, <xM#3>). Which sub-numbers are used usually depends on other parts of a Specialization and their references to required placeholders, which is explained in section 3.1.3.6.4.

3.1.3.6.4 References to placeholders and relations

According to the styles for placeholders that can be referenced, an enumeration value "e" can refer to a particular placeholder:

1. e(-><xM>)
2. e(-><xM#S>)

This denotes that "e" is to be used with "<xM>" or "<xM#S>", resp.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Example: A Specialization contains the Elements "mId" and "phase". "mId" is an Identifier with placeholder definition <m2#(1..3)>. "phase" is a string that permits the values "a", "b", and "c" using this expression:

"a"(-><m2#1>)
"b"(-><m2#2>)
"c"(-><m2#3>)

This expresses that the enumeration value "a" is to be used with the placeholder <m2#1>, "b" is to be used with <m2#2> and "c" with <m2#3>.

Similarly, a placeholder "yN" can refer to a particular placeholder:

3. <yN->xM>
4. <yN->xM#S>
5. <yN#T->xM>
6. <yN#T->xM#S>

where "T" is a sub-number of "yN".

It is also feasible to associate placeholders with cardinalities:

7. <yN#(a..b)->xM#(a..b)>

denotes that <yN#1> is to be used with <xM#1>, <yN#2> is to be used with <xM#2>, etc.

Note: In this case, the placeholder expressions of yN and xM must have the same cardinality.

In some cases, there is a need to express that multiple list items with similar values are feasible or required, but only particular combinations of these different data are permitted. The following example shows that several "fData" list items with different "phase" value are required, but that these list items may only express either the "phase" value combination { "a", "b", "c" } or the "phase" value combination { "a", "abc", "neutral" }. The permitted combinations are defined in a note below a table:

Scenario [{...}]: M/R/O [\W][\C]	Element	Value	[High-Level Mapping] Element and value rules
2: M	F. fListData. fData.		
2: M	zId	<z3#(3..5)>	
2: M	phase	"a"(-><z3#1>)	
		"b"(-><z3#2>)	
		"c"(-><z3#3>)	
		"abc"(-><z3#4>)	
		"neutral"(-><z3#5>)	

Table 5: Content of an example Specialization

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Note: One of the following combinations SHALL be used at least: {<z3#1>, <z3#2>, <z3#3>} or {<z3#1>, <z3#4>, <z3#5>}.

3.1.3.7 Rules for content of "Value" column

For a given Scenario, the "Value" column may restrict the permitted content of a Function's Element to one or more particular values. This means that Elements with values deviating from the restriction (i.e. from the permitted values) do not belong to the respective Scenario and need to be considered as if the Element is not set. If more than one particular value is permitted for an Element, the values are in a single line each.

If a presence indication is set for the value (in an additional column before the value), the following rules SHALL be applied:

- "M" means that the value SHALL be supported. This means the value needs to be set at a certain point in time (depending on the value rules) or for a certain Element within a list entry.
- "R" means that the value SHOULD be supported.
- "O" means that the value MAY be supported.

If all possible values of a given mandatory Element are optional or recommended and this Element is used for the purpose of the respective Scenario, one of the values SHALL be set. If all possible values of a given optional or recommended Element are optional or recommended, this Element MAY contain also other values, but then this Element SHALL NOT be considered as part of the respective Scenario.

M, R or O may be combined with the suffix "(event)" to express that a supported value only has to be supported during a certain event and hence does not need to be present at all times. If the event is not active another value may be set. In most cases a High-Level requirement reference for the event is given in the rules column.

If no presence indication is set for the value, the following rules SHALL be applied:

- In case of Elements where the server may set or change an Element on its own (see section 3.1.3.5):
  - within the tables in the "Server data - Resources" sections:
    - the server SHALL support at least one of the listed values.
  - within the tables in the "Client data - Specializations" sections:
    - the client SHALL support all listed values.
- In case of Elements that are writeable or changeable (see section 3.1.3.5):
  - within the tables in the "Server data - Resources" sections:
    - the server SHALL support all listed values.
  - within the tables in the "Client data - Specializations" sections:
    - the client SHALL support at least one of the listed values.

Depending on the Element, different values may be used during runtime. If this is the case, those rules are described within the value rules.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

If a value is placed in parenthesis, the corresponding value is a recommendation. The actual value MAY deviate from this, e.g. "(1024)".

3.1.3.8 General information on how to interpret the "Content of Function..." and "Content of Specialization..." tables

Within the "Client data - Specializations" sections each Specialization is described in an own sub-section with the name "Specialization "<name of the Specialization>"" (e.g. "Specialization "Measurement_GridFeedInEnergy""). It contains only one table that includes all Elements needed for this Specialization. The different Functions are mentioned in a continuous row, highlighted with grey background colour. This row contains the following parts:

<Feature Type>. <Function>.[<list entry instance name>.]

The <list entry instance name> is only included if the <Function> is a list-based Function. An example could be:

DeviceConfiguration. deviceConfigurationKeyValueDescriptionListData. deviceConfigurationKeyValueDescriptionData.

In the following rows, only the names of the Elements are stated, without the prefix described above.

Within the "Server data - Resources" sections each Feature Type is described in an own sub-section with the name "Feature Type "<name of the Feature Type>"" (e.g. "Feature Type "Measurement""). It contains sub-sections for each Function named "Function "<name of the Function>"" (e.g. "Function "measurementListData""). These sections contain one table with all Elements needed for this resource. The list entries are mentioned in a continuous row, highlighted with grey background colour. This row contains the following parts:

<Feature Type>. <Function>.[<list entry instance name>.]

The <list entry instance name> is only included if the <Function> is a list-based Function. An example could be:

Measurement. measurementDescriptionListData. measurementDescriptionData.

In the following rows, only the names of the Elements are stated, without the prefix described above.

For both kinds of tables, the following applies:

- Parent Elements are marked with a dot at the end of the name:
  <parent Element>.
  E.g.:
  value.
- If there are sub-Elements, they are described in own rows with the name of the parent Element as prefix, separated by a dot and a blank space:

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

546 <parent Element>. <sub-Element>
547 E.g.:
548 value. number

549

550 ### 3.1.4 Rules for "Feature Types and Functions..." tables

551 #### *3.1.4.1 Presence indications for "Feature Types and Functions..." tables*
552 The following presence indications are used:

Abbreviation	Meaning	Link to requirement keywords
M	Mandatory	SHALL
R	Recommended	SHOULD
O	Optional	MAY

553 *Table 6: Presence indication of Feature Types and Functions support*

554 If at least one Function of a Feature has the presence indication "M", it is mandatory to support the
555 Feature.

556

557 #### *3.1.4.2 Rules for "Possible operations" column*
558 Within the "Feature Types and Functions..." tables the column "Possible operations" state whether
559 the Function is read- or writeable (as defined in the detailed discovery mechanism, see
560 [ProtocolSpecification]).

561 If the "partial" concept (also called "restricted function exchange") SHALL be supported, the
562 following notation is used (separated for read and write access):

563 read (M). partial (M)
564 write (M). partial (M)

565 If the "partial" concept SHOULD be supported, the following notation is used:

566 read (M). partial (R)
567 write (M). partial (R)

568 If the "partial" concept MAY be supported, the following notation is used:

569 read (M). partial (O)
570 write (M). partial (O)

571 The server can decide whether a notification is submitted complete or partial (as described in
572 [ProtocolSpecification]) if not defined differently within this Use Case Specification.

573

574 ### 3.1.5 "Actor ... overview" diagram rules
575 Within the "Actor [...] overview" diagrams in the "Actors" sub-sections the complete functionality of
576 this Use Case is provided, including optional Scenarios. Which Scenarios are optional can be found in
577 Table 1. The Actor MAY have more functionality implemented than needed for this Use Case.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

For the following Actor overview example, a brief description of the graphical symbols will be described.

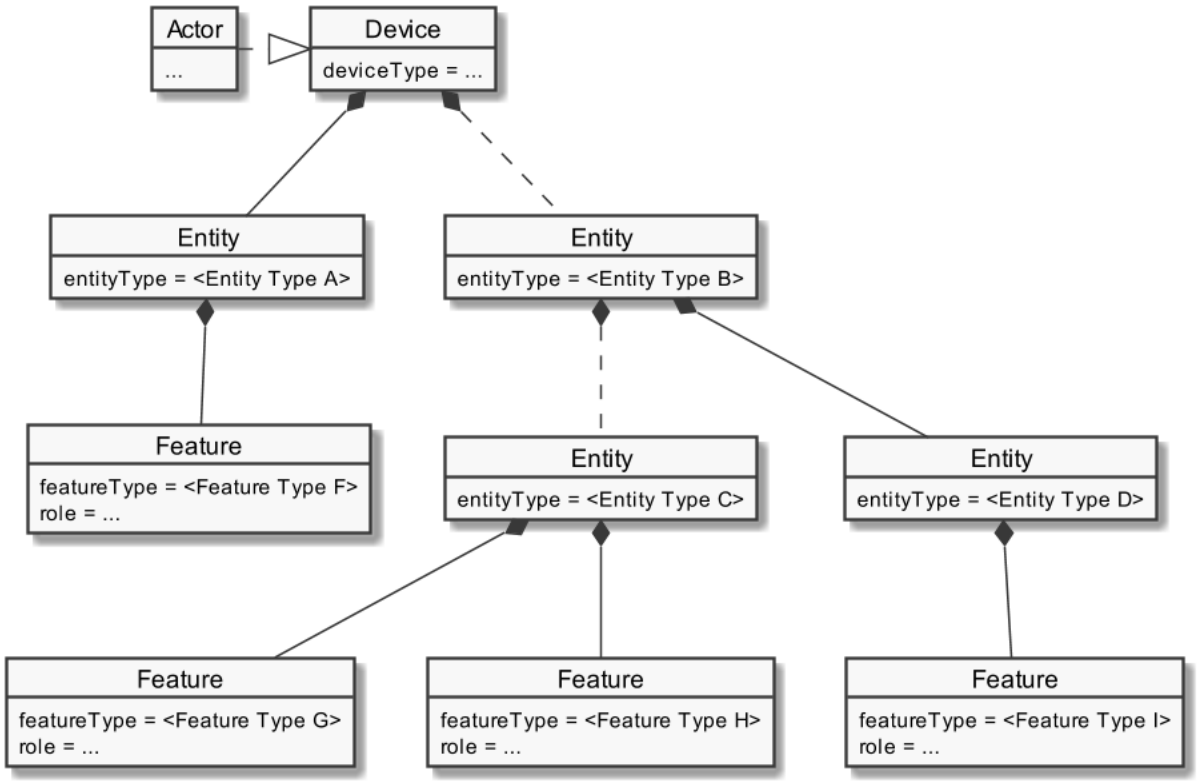


Figure 3: Actor overview example

The solid lines in the figure represent an immediate parent-childhood relation: The Entity with "<Entity Type A>" is a direct child of "Device". The Entity with "<Entity Type D>" is a direct child of the Entity with "<Entity Type B>". All Features are immediate child of the respective Entity.

The dashed lines in the figure express that there MAY be additional Entities between the shown Entities: A vendor's implementation MAY have one or more Entities between "Device" and the Entity with "<Entity Type B>". Likewise, a vendor's implementation MAY have one or more Entities between the Entity with "<Entity Type B>" and the Entity with "<Entity Type C>".

3.1.6 Specializations

Within the "Actors" sub-sections, Specializations are referenced. A Specialization describes a dataset necessary to fulfil the specific requirements of a High-Level Use Case and its Scenarios. Often, data from multiple different Features and Functions are needed to fulfil the requirements. Therefore, a Specialization defines a dataset that may encompass multiple related Functions from one or more different Features.

As different Use Cases sometimes share similar requirements, Specializations are also important from a re-usability perspective. This approach is used to improve consistency across Use Cases and avoid multiple variances of basically the same dataset. This is especially important in the case when an implementation supports multiple Use Cases. E.g. if a power measurement is necessary in two different Use Cases, both Use Cases could define slightly different datasets. In this case, the server as

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

well as the client functionality would have to implement both variances if both Use Cases are supported. This means, depending on the number of Use Cases, two or more datasets need to be generated, transmitted and stored instead of one. Therefore, common Specializations are defined to enable consolidated implementations. Specializations are detailed per Actor, as distinct Actors may use different parts of a Specialization or even have different permissions to change data. In general, this may also depend on the respective Scenario.

If a Feature server can provide the data of a Specialization, the data does not necessarily always need to be available at the Feature server. There might be situations where the user deactivates a Use Case. There may also be other reasons why Use Case data cannot be provided currently. Therefore, a client always needs to be subscribed (as described in section 3.3.4) on the corresponding dataset to stay updated.

The SPINE resource descriptions given in the "SPINE resources of the Actor" sections are derived from the Specializations given in the Actor's overview diagram.

3.1.7 Order of messages within the sequence diagrams

There are several sequence diagrams in this document describing message flows. The order of the messages SHOULD be kept by the communications partners, but there might be cases where a different order makes sense. The communications partners SHALL be able to handle the Scenario functionalities even if the messages are transmitted in a different order by the other Actor(s). The sequence diagrams can be seen as examples.

3.1.8 Further information and rules

3.1.8.1 Frequently used Element rules for the Resource and Specialization tables

This section serves as a collection of rules frequently used by Resource and Specialization tables of the subsequent sections. Each rule applies only where referenced explicitly in the tables.

Note: The purpose of this collection is just to reduce the size of the tables. As such, no rule has a meaning without a reference indicating the required rule. A reference looks like "[String-length rules]", e.g.

[String-length rules]:

The string-length SHOULD NOT be longer than 256 characters. If it is longer, the sender SHALL consider the possibility that the receiver will shorten the string to 256 characters.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

3.2 Actors

3.2.1 Identifiable Node

3.2.1.1 Resource hierarchy

If Use Case discovery is supported (see section 3.1.2) this Actor SHALL be denoted as "IdentifiableNode" in the Element "nodeManagementUseCaseData. useCaseInformation. actor".

The following diagram provides an overview of the Actor Identifiable Node's resource hierarchy.

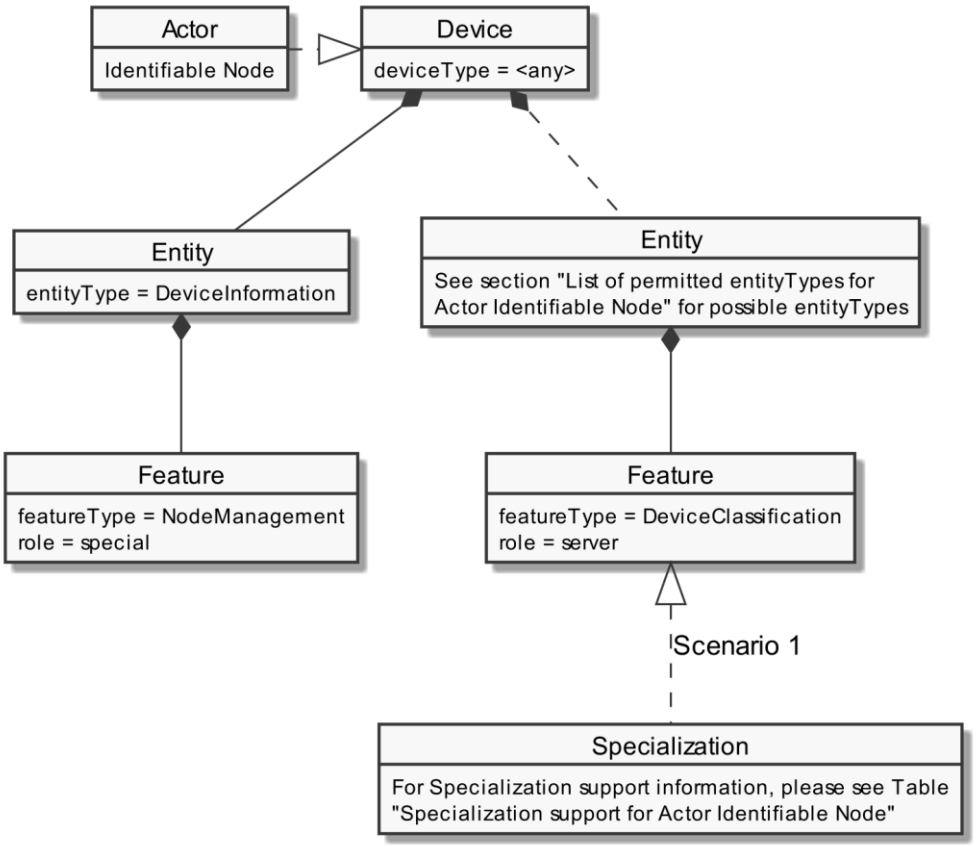


Figure 4: Actor "Identifiable Node" overview

The ""Actor ... overview" diagram rules" section describes how to interpret the diagram above. See the "Specializations" section for more information regarding the Specializations given in the diagram above.

Note: The entityType "DeviceInformation" with the featureType "NodeManagement" is required by the SPINE protocol and therefore SHALL be supported. Both types are added in the figure for completeness but are not directly linked to the Use Case.

The Use Case specific data follow behind one of the entityTypes listed in section 3.2.1.1.1. The Specializations represent the Scenario specific data that must be supported for each Scenario and are realized through the corresponding featureTypes.

If a Specialization is connected to a Feature with the role "client", the Actor has a client role for this data. This means that the Actor accesses the data set described by the Specialization at a

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

corresponding server Feature. Further details are described in the sub-section "Client data - Specializations".

If a Specialization is connected to a Feature with the role "server", the Actor has the server role for this data. This means that the Actor must provide the corresponding data set of the Specialization as part of its Features. Further details are described in the sub-section "Server data - Resources".

Specialization name	Scenario	Used Feature...	...in tables
DeviceClassification_NodeIdentification	1	DeviceClassification	Table 9

Table 7: Specialization support for Actor Identifiable Node

3.2.1.1.1 List of permitted entityTypes for Actor Identifiable Node

In this version of this Use Case, only the following entityTypes are permitted for the Actor Identifiable Node:

- DHWCircuit
- GridConnectionPointOfPremises
- HeatingZone
- HeatPumpAppliance
- HVACRoom
- SubMeterElectricity

This may change at a later version and be extended to further entityTypes.

3.2.1.2 Server data - Resources

Behind any entityType permitted in section 3.2.1.1.1 the Actor Identifiable Node SHALL offer the Feature Types and Functions given in the table below.

Feature Type	Scenario: M/R/O	Function	Possible operations
DeviceClassification	1: M	deviceClassificationManufacturerData	read (M). partial (R)

Table 8: Feature Types and Functions used within this Use Case by the Actor Identifiable Node

For each of these Feature Types, the following rule applies: There SHALL be at maximum one Feature with the Feature Type in the Entity.

Note: As a consequence of the previous rule, an implementation may need to have Feature data from different Scenarios/Specializations or even Use Cases in a given Feature.

The Scenario number shows in which Scenarios the Identifiable Node acts as server and which Feature Types and Functions are relevant in each Scenario.

A detailed definition of the Elements and values that shall be supported in each Function is given in the following sub-sections.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Note: If in the table above "partial" read is not mentioned or is only optional, it still might be mandatory to support partial notifications. The details of "partial" support are described within the Scenario sections.

Note: The presence indications stated above are meant relative to the ones of the according Scenario stated in Table 1. I.e., if a Scenario is optional ("O") and a Feature Type is mandatory ("M"), the Feature Type need only be supported if the Scenario is supported, too.

Note: Further Features MAY be implemented on the same Entities; also, further Functions MAY be implemented in the used Entities.

3.2.1.2.1 Feature Type "DeviceClassification"

3.2.1.2.1.1 Function "deviceClassificationManufacturerData"

Scenario [{...}]: M/R/O [\W][\C]	Element	Value	[High Level Mapping] Element and value rules
1: M	DeviceClassification. deviceClassificationManufacturerData.		
1: M	deviceName		[NID-001] [String-length rules]
1: O	deviceCode		[NID-005] [String-length rules]
1: M	serialNumber		[NID-003] [String-length rules]
1: O	vendorName		[NID-004] [String-length rules]
1: M	brandName		[NID-002] [String-length rules]
1: O	manufacturerNodeIdentification		[NID-006] [String-length rules]

Table 9: Content of Function "deviceClassificationManufacturerData" at Actor Identifiable Node

3.2.1.3 Client Data - Specializations

As this Actor has only server functionality, no Specializations are described within this section.

3.2.2 Visualization Appliance

3.2.2.1 Resource hierarchy

If Use Case discovery is supported (see section 3.1.2) this Actor SHALL be denoted as "VisualizationAppliance" in the Element "nodeManagementUseCaseData. useCaseInformation. actor".

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

The following diagram provides an overview of the Actor Visualization Appliance's resource hierarchy.

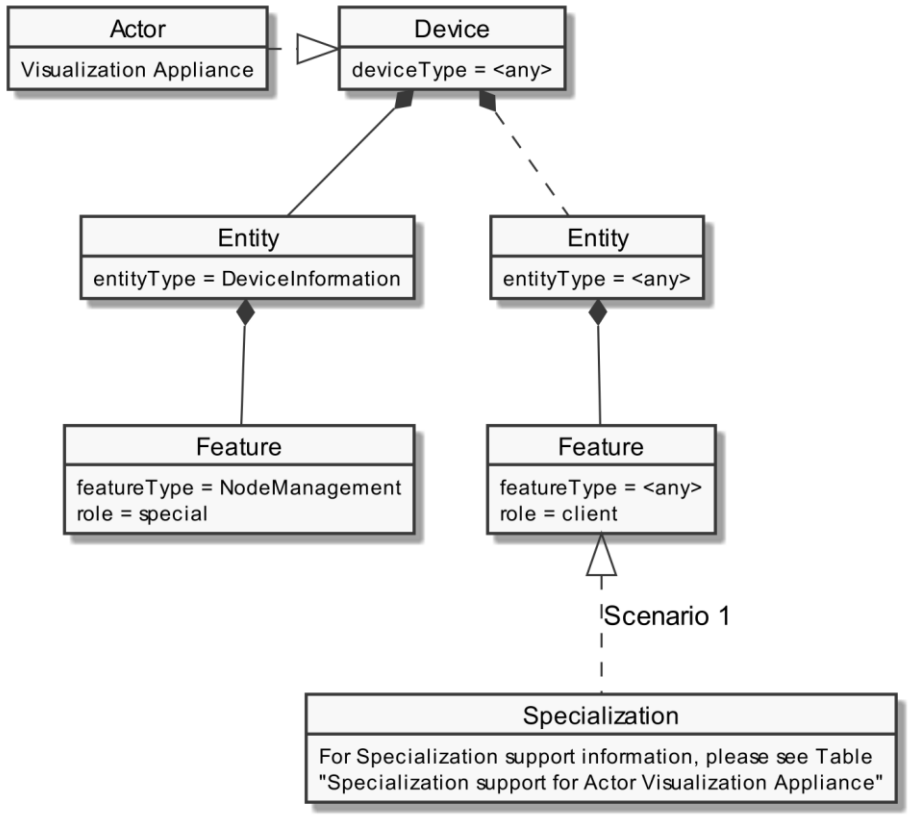


Figure 5: Actor "Visualization Appliance" overview

The ""Actor ... overview" diagram rules" section describes how to interpret the diagram above. See the "Specializations" section for more information regarding the Specializations given in the diagram above.

Note: The entityType "DeviceInformation" with the featureType "NodeManagement" is required by the SPINE protocol and therefore SHALL be supported. Both types are added in the figure for completeness but are not directly linked to the Use Case.

The Use Case specific data follow behind any entityType. The Specializations represent the Scenario specific data that must be supported for each Scenario and are realized through the corresponding featureTypes.

If a Specialization is connected to a Feature with the role "client", the Actor has a client role for this data. This means that the Actor accesses the data set described by the Specialization at a corresponding server Feature. Further details are described in the sub-section "Client data - Specializations".

If a Specialization is connected to a Feature with the role "server", the Actor has the server role for this data. This means that the Actor must provide the corresponding data set of the Specialization as part of its Features. Further details are described in the sub-section "Server data - Resources".

Specialization name	Scenario	Described in table
DeviceClassification_NodeIdentification	1	Table 10

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Table 10: Specialization support for Actor Visualization Appliance

3.2.2.2 Server Data - Resources

As this Actor has only client functionality, no resources are described within this section.

3.2.2.3 Client data - Specializations

3.2.2.3.1 Topic "DeviceClassification"

3.2.2.3.1.1 Specialization "DeviceClassification_NodeIdentification"

Scenario [{...}]: M/R/O [\W][\C]	Element	Value	[High Level Mapping] Element and value rules
1: M	DeviceClassification. deviceClassificationManufacturerData.		
1: M	deviceName		[NID-001] [String-length rules]
1: M	deviceCode		[NID-005] [String-length rules]
1: M	serialNumber		[NID-003] [String-length rules]
1: M	vendorName		[NID-004] [String-length rules]
1: M	brandName		[NID-002] [String-length rules]
1: M	manufacturerNodeIdentification		[NID-006] [String-length rules]

Table 11: Content of Specialization "DeviceClassification_NodeIdentification" at Actor Visualization Appliance

3.3 Pre-Scenario communication

3.3.1 General information

The Pre-Scenario communication is needed if a client does not know the corresponding addresses on the server or if the required subscriptions or bindings are not active. In this case certain general communication mechanisms SHALL be used within SPINE:

a) Detailed discovery: allows to discover resource addresses.
b) Binding: allows to bind to resource address, which is frequently necessary to obtain write privileges.
c) Subscription: allows to subscribe to resource addresses, which is necessary to receive unsolicited notifications if a resource changes during runtime.

It is possible to combine those steps for multiple Scenarios or also multiple Use Cases:

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

- E.g. if multiple Scenarios in multiple Use Cases use the same Feature, only one subscription needs to occur.
- E.g. a complete detailed discovery or a subscription to the NodeManagement Feature needs to occur only once for all Use Cases.

Depending on which Entity, Feature and Functions are used within a Scenario the payload of the corresponding messages may slightly differ, but the basic principles and messages used stay the same.

The subsequent messages SHALL be exchanged for those parts that have not already been performed since the current connection is established or if those parts are outdated for another reason (e.g. if the detailed discovery is needed, but the bindings and subscriptions are still active from a previous connection only the detailed discovery messages need to be exchanged). If all Pre-Scenario communication parts are up to date, this section MAY be skipped, and the implementation can proceed as described in the corresponding "Scenario communication" sections.

After the connection is re-established (e.g. due to a power loss or a firmware update) the Pre-Scenario communication SHALL be performed as well. There may be circumstances where messages from the Pre-Scenario communication may be exchanged again.

Often the necessary messages of different Scenarios can be combined, so that only one single message is needed instead of multiple messages for the different Scenarios. This also is the case for the Pre-Scenario communication. In most cases only one "read" operation on the detailed discovery is necessary, as well as only one subscription request or binding request is needed for each Feature. Often multiple Scenarios within a Use Case access the same Feature, so only one subscription or binding is necessary.

3.3.2 Detailed discovery

For the functionality where a client already has current detailed discovery information (i.e. independent of this Use Case or any Scenario of it) the remainder of this section SHOULD be skipped.

Otherwise, the following procedure SHALL be performed in the given order:

1. If a client is not subscribed to the primary NodeManagement instance, the client SHALL acquire a subscription according to the figure provided within this sub-section.
2. A client SHALL read the detailed discovery information according to the figure provided within this sub-section. It SHALL keep the received information as far as it concerns mandatory and supported optional Entity Types, Feature Types and Functions of this Use Case that are needed by the client. This means that a client may choose how to store the necessary information. E.g. a client Actor can store the information how to address the necessary Features of the implemented Scenarios but may discard the Entity information.
3. If and as long as a client has a subscription to the detailed discovery information of an Actor and receives proper notifications, it SHALL consider (i.e. integrate into the kept detailed discovery information) the received information as far as it concerns mandatory and supported optional Entity Types, Feature Types and Functions of this Use Case.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

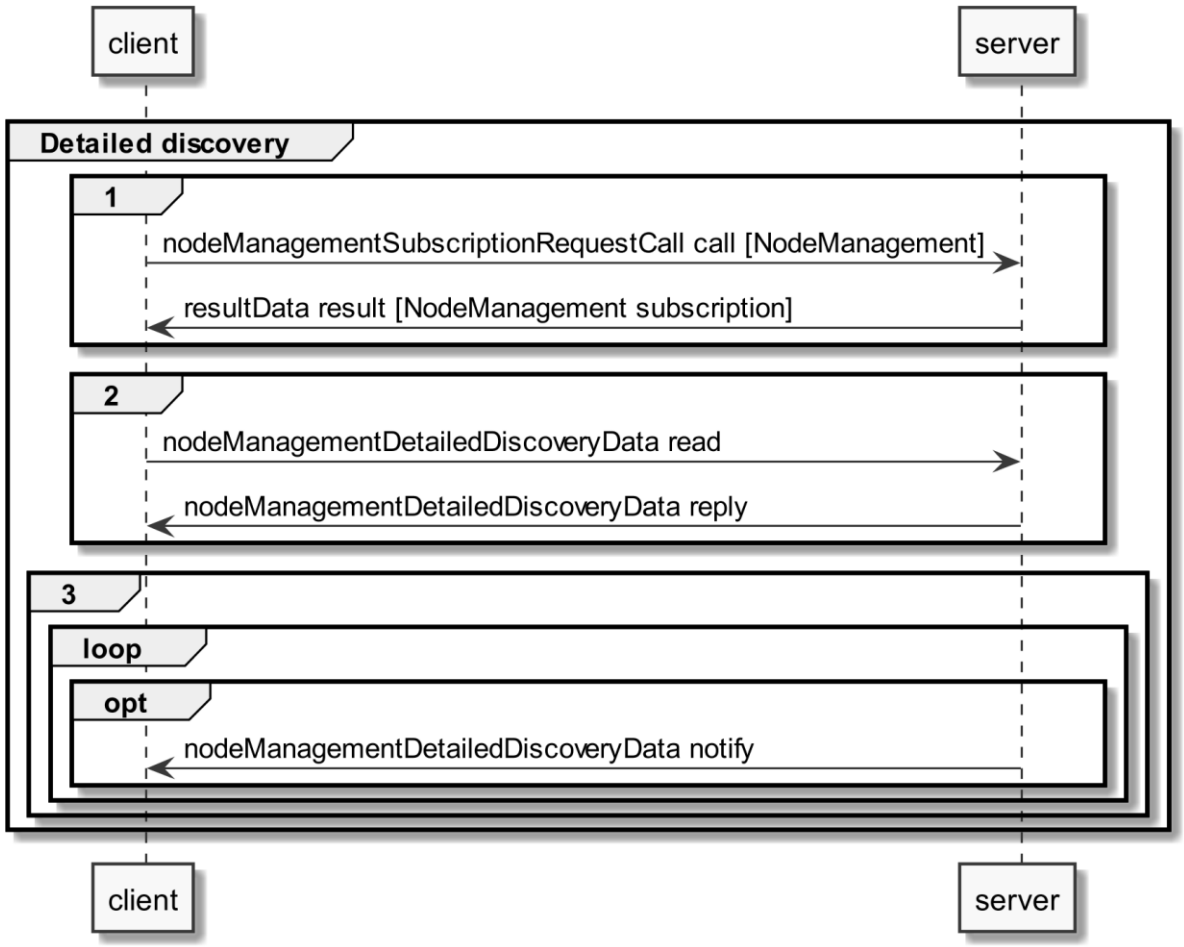


Figure 6: Pre-Scenario communication - Detailed discovery sequence diagram

Example XMLs are provided within Annex A.

If the "nodeManagementDetailedDiscoveryData read" fails, the client SHOULD retry to read the detailed discovery information until the "nodeManagementDetailedDiscoveryData reply" message was received successfully.

If all functionality is present at all times: The "nodeManagementDetailedDiscoveryData reply" message contains at least the mandatory Entities and Features given in the "Actor [...] overview" diagrams as well as the used Functions and their "possible operations" described in section 3.2 and its sub-sections.

If functionality is added or removed dynamically: The "nodeManagementDetailedDiscoveryData reply" message does not need to contain all mandatory Entities and Features given in the "Actor [...] overview" diagrams as well as all needed Functions and their "possible operations" described in section 3.2 and its sub-sections. However, as soon as the functionality is available it will be announced via a "nodeManagementDetailedDiscoveryData notify" message.

For the nodeManagementDetailedDiscoveryData read Function it is recommended to use a partial read with separated Selectors that may use one of the following Elements:

- entityType
- featureType

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Note: Even with the usage of Selectors Features and Entities that are not relevant for this Use Case may be discovered. However, only Features and Entities that fulfil the hierarchical order as described within the Actors' sections shall be considered for this Use Case.

A "partial" notify SHALL be supported without using Selectors and Elements. Partial "delete" notify SHOULD also be supported with separated Selectors that may use one of the following Elements:

- entityAddress
- featureAddress

3.3.3 Binding

If binding is required by a Scenario that uses Features with writeable or changeable data, the server SHALL support binding for the respective Features. Before a write on a Function of a Feature occurs, the client SHALL create a binding to the corresponding Feature. For this the nodeManagementBindingRequestCall Function is used as shown in the following sequence diagram:

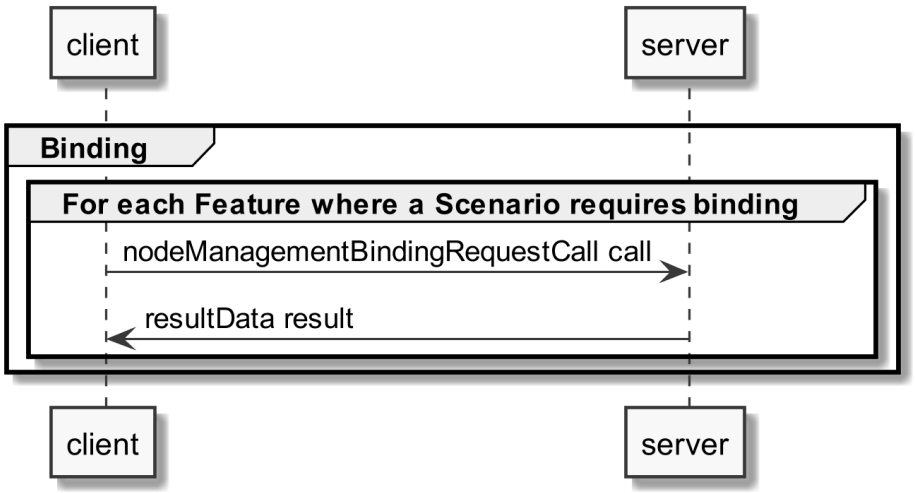


Figure 7: Pre-Scenario communication - Binding sequence diagram

If functionality is added or removed dynamically, binding may not be possible at all times on the required Functions. A client SHALL retry to create a binding again when receiving according updated detailed discovery information.

3.3.4 Subscription

A server SHALL support subscription for all Features that contain readable data that may change during runtime. The client SHALL create a subscription for all Features that the client wants to read. For this the nodeManagementSubscriptionRequestCall Function is used as shown in the following sequence diagram:

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

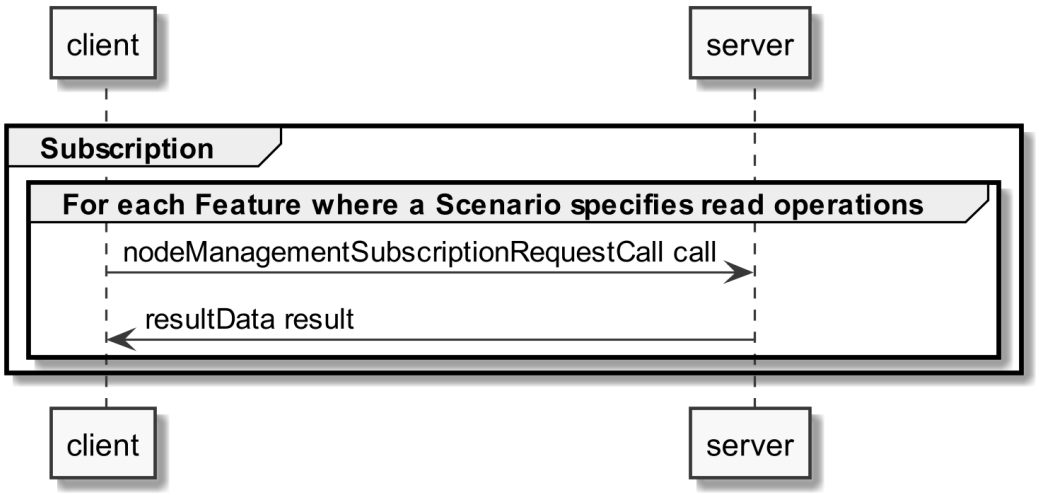


Figure 8: Pre-Scenario communication - Subscription sequence diagram

If the subscription request fails (e.g. because it is not supported by the server or the maximum number of possible subscriptions is reached), the client SHOULD read the data periodically (so-called "polling").

If functionality is added or removed dynamically, subscription may not be possible at all times on the required Functions. A client SHALL retry its subscription procedure again when receiving according updated detailed discovery information.

3.3.5 Dynamic behaviour

In case Entities or Features are removed, a nodeManagementDetailedDiscoveryData "notify" is transmitted that informs about the deleted Entities and Features. All existing binding or subscription entries on the deleted Features SHALL be deleted by each device.

In case Entities or Features are added the Pre-Scenario communication starts with transmitting a nodeManagementDetailedDiscoveryData "notify" that contains the added Entities and Features.

3.4 Scenarios

3.4.1 Scenario 1 - Get manufacturer data

3.4.1.1 Pre-Scenario communication

1. **Detailed discovery**: Actors that act as client within this Scenario, need to know the addresses of the server Features used in the Initial Scenario communication. If the address of a particular server Feature is not known, the detailed discovery must be used, as described in section 3.3.2.
2. **Binding**: Binding SHOULD NOT be used for this Scenario.
3. **Subscription**: Actors SHALL create a subscription for each server Feature that is relevant for the corresponding Actor within this Scenario, as described in section 3.3.4.

The Initial Scenario communication SHALL start at the latest when the required resources on an Actor are known and the necessary binding and subscription procedures have been finished. However, as

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

soon as the address of a required resource is known, the Initial Scenario communication for this resource MAY start already, even if the addresses of other required resources are not known yet.

If required resources are removed and added again, they are re-discovered, and the Initial Scenario communication is triggered again for those resources.

3.4.1.2 Initial Scenario communication

Each time a (re-)connection is established, even if the Pre-Scenario communication phase is skipped, the messages shown in the following sequence diagram SHALL be exchanged, as the corresponding resources may have changed in the meantime:

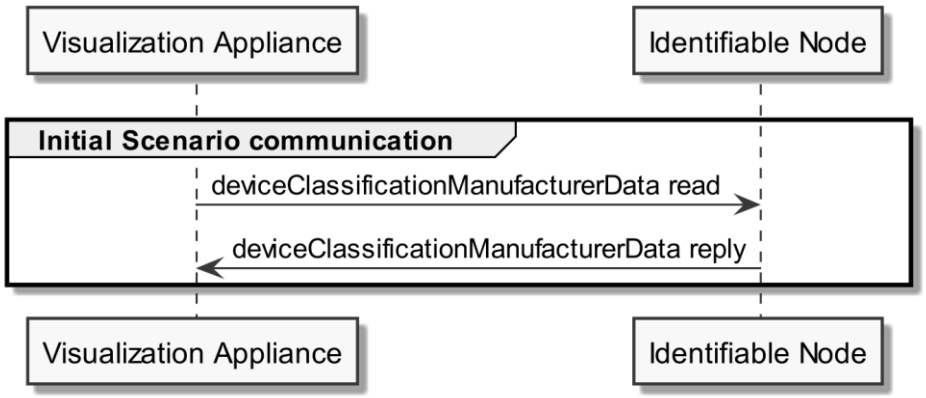


Figure 9: Scenario 1 - Initial Scenario communication sequence diagram

The following table shows where the required content of the reply messages from the sequence diagram is described:

Message name from sequence diagram	Content description in table	Scenario number in table
deviceClassificationManufacturerData reply	Table 9	1

Table 12: Initial Scenario communication content references for reply messages of Scenario 1

XML examples can be found in Annex A.

Note: Within the Initial Scenario communication, the content required by this Scenario MAY not be provided completely, but later during Runtime Scenario communication.

3.4.1.3 Runtime Scenario communication

Based on the Initial Scenario communication, the Runtime Scenario communication provides updates during runtime.

If one of the referenced server Functions' data change, the server SHALL submit the change as shown in the following figure:

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

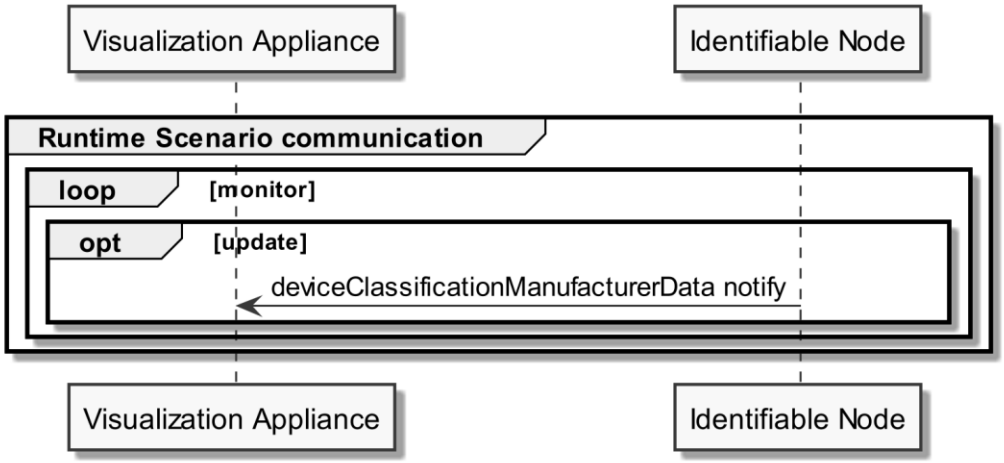


Figure 10: Scenario 1 - Runtime Scenario notifications

Note: To interpret partial notification messages correctly the information obtained during the Initial Scenario communication phase is required.

Note: A read operation ("polling") on all Functions is possible at any time, e.g. if a notification could not be evaluated.

The following table shows where the required content of the notify messages of the sequence diagram is described:

Message name from sequence diagram	Content description in table	Scenario number in table
deviceClassificationManufacturerData reply	Table 9	1

Table 13: Runtime Scenario communication content references for notify messages of Scenario 1

XML examples can be found in Annex A.

3.4.1.4 Additional information

None.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Annex A - SPINE best practice

A.1 Sequence Diagrams

A.1.1 Pre-Scenario communication

These steps need to be done only once.

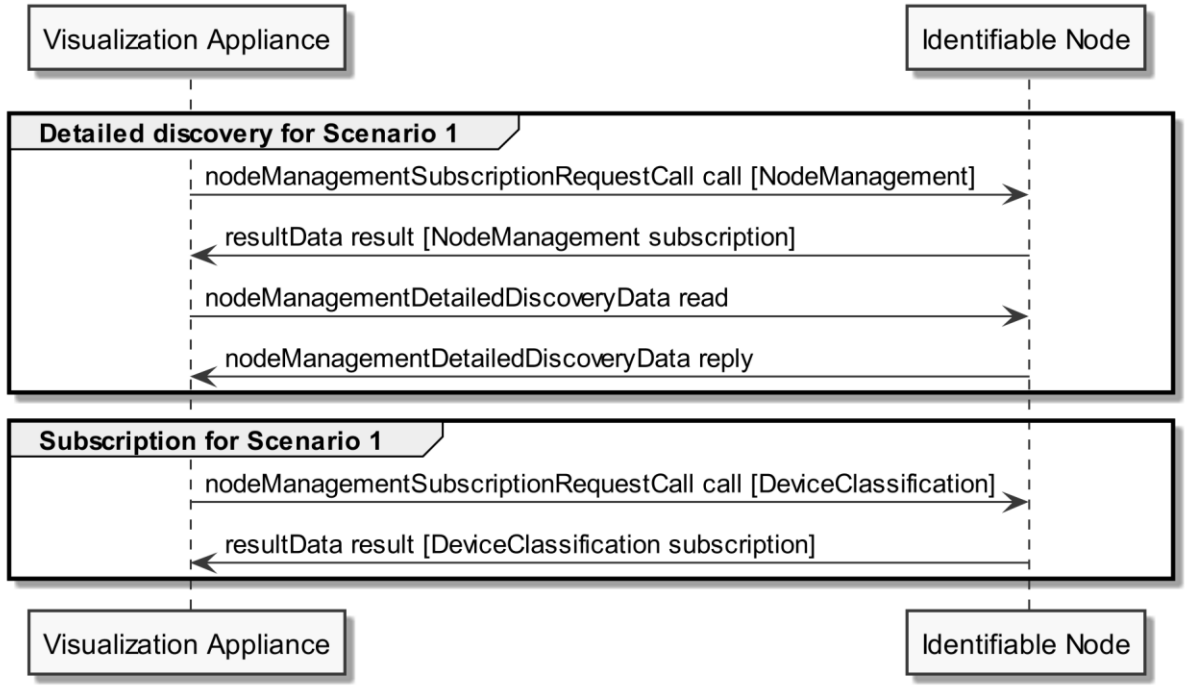


Figure 11: Best practice - Pre-Scenario communication

The message content is provided in the "XML Examples" section.

A.1.2 Initial Scenario communication

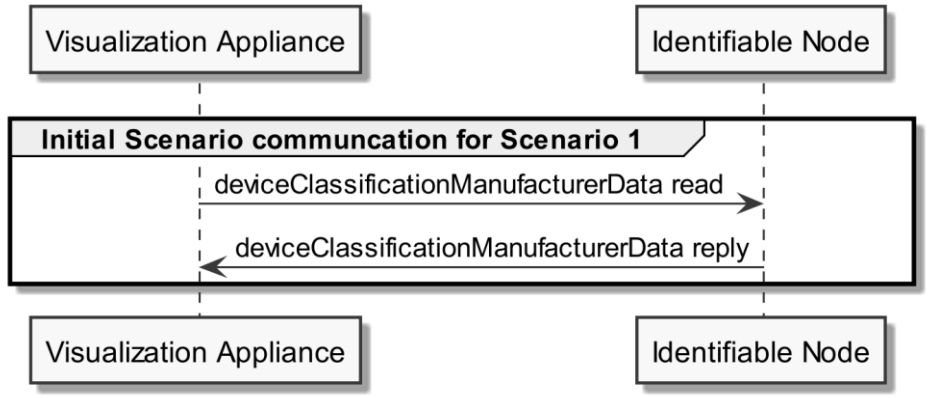


Figure 12: Best practice - Initial Scenario communication

The message content is provided in the "XML Examples" section.

Note: It is considered best practice to read xDescriptionListData before xConstraintsListData and xConstraintsListData before xListData.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

A.1.3 Runtime Scenario communication

After the Initial Scenario communication, the following messages can occur whenever the described processes permit and require the respective data exchange.

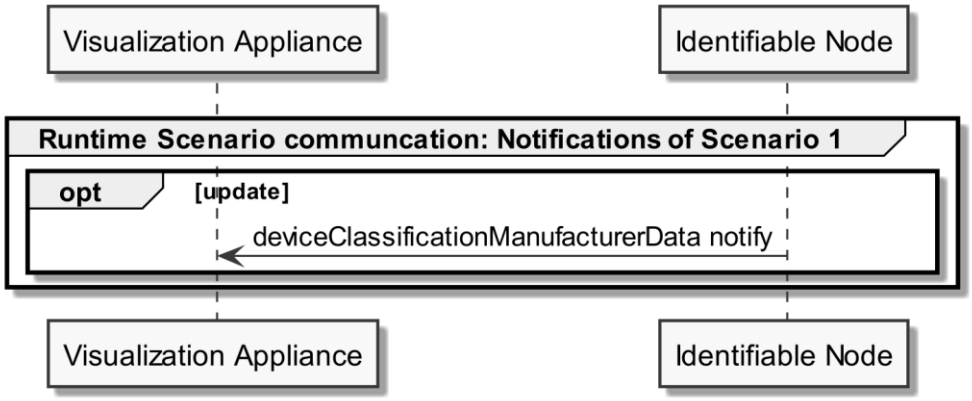


Figure 13: Best practice - Runtime Scenario communication - Notifications

The message content is provided in the "XML Examples" section.

A.2 XML Examples

Within the XMLs two devices are used as example: A Visualization Appliance with the device address "d:_i:46925_CEM" and a Heat Pump Compressor (as Identifiable Node) with device address "d:_i:46925_HeatPump".

It is assumed that the device addresses are already known (from a previous connection, e.g.) and do not need to be discovered with the XML examples given in this best practice.

A.2.1 Pre-Scenario communication

A.2.1.1 Example content of "nodeManagementSubscriptionRequestCall call [NodeManagement]"

Detailed discovery subscription for all Scenarios.

As a device may have implemented dynamic Features or Entities that are added during runtime, a subscription on the NodeManagement Feature itself enables notifications of added or removed Features or Entities.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
  file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_CEM</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressSource>
```

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

```
    <addressDestination>
      <device>d:_i:46925_HeatPump</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressDestination>
    <msgCounter>1</msgCounter>
    <cmdClassifier>call</cmdClassifier>
    <ackRequest>true</ackRequest>
    <timestamp>2021-08-11T11:19:01.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <nodeManagementSubscriptionRequestCall>
        <subscriptionRequest>
          <clientAddress>
            <entity>0</entity>
            <feature>0</feature>
          </clientAddress>
          <serverAddress>
            <entity>0</entity>
            <feature>0</feature>
          </serverAddress>
        </subscriptionRequest>
      </nodeManagementSubscriptionRequestCall>
    </cmd>
  </payload>
</datagram>
```

A.2.1.2 Example content of "resultData result [NodeManagement subscription]"

Detailed discovery subscription result for all Scenarios.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
  file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_HeatPump</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_CEM</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressDestination>
    <msgCounter>1</msgCounter>
    <msgCounterReference>1</msgCounterReference>
    <cmdClassifier>result</cmdClassifier>
    <timestamp>2021-08-11T11:19:02.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <resultData>
        <errorNumber>0</errorNumber>
      </resultData>
    </cmd>
  </payload>
</datagram>
```

A.2.1.3 Example content of "nodeManagementDetailedDiscoveryData read"

Detailed discovery read for all Scenarios (it is assumed that the full functionality of this Use Case is realized in both devices).

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Note: It is also possible to add further Selectors to search for Entity Types and Feature Types used by other supported Use Cases. Alternatively, a full read may be used.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
  file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_CEM</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_HeatPump</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressDestination>
    <msgCounter>2</msgCounter>
    <cmdClassifier>read</cmdClassifier>
    <timestamp>2021-08-11T11:19:03.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <function>nodeManagementDetailedDiscoveryData</function>
      <filter>
        <cmdControl>
          <partial/>
        </cmdControl>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <entityInformation>
            <entityType>HeatPumpAppliance</entityType>
          </entityInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <entityInformation>
            <entityType>DHWCircuit</entityType>
          </entityInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <entityInformation>
            <entityType>HeatingZone</entityType>
          </entityInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <entityInformation>
            <entityType>HVACRoom</entityType>
          </entityInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <entityInformation>
            <entityType>GridConnectionPointOfPremises</entityType>
          </entityInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <entityInformation>
            <entityType>SubMeterElectricity</entityType>
          </entityInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
        <nodeManagementDetailedDiscoveryDataSelectors>
          <featureInformation>
            <featureType>DeviceClassification</featureType>
          </featureInformation>
        </nodeManagementDetailedDiscoveryDataSelectors>
      </filter>
      <nodeManagementDetailedDiscoveryData/>
    </cmd>
  </payload>
</datagram>
```

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

A.2.1.4 Example content of "nodeManagementDetailedDiscoveryData reply"

Detailed discovery reply for all Scenarios (it is assumed that the full functionality of this Use Case is realized in both devices).

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
      file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_HeatPump</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_CEM</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressDestination>
    <msgCounter>2</msgCounter>
    <msgCounterReference>2</msgCounterReference>
    <cmdClassifier>reply</cmdClassifier>
    <timestamp>2021-08-11T11:19:04.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <function>nodeManagementDetailedDiscoveryData</function>
      <filter>
        <cmdControl>
          <partial/>
        </cmdControl>
      </filter>
      <nodeManagementDetailedDiscoveryData>
        <entityInformation>
          <description>
            <entityAddress>
              <entity>1</entity>
            </entityAddress>
            <entityType>HeatPumpAppliance</entityType>
          </description>
        </entityInformation>
        <featureInformation>
          <description>
            <featureAddress>
              <entity>1</entity>
              <feature>8</feature>
            </featureAddress>
            <featureType>DeviceClassification</featureType>
            <role>server</role>
            <supportedFunction>
              <function>deviceClassificationManufacturerData</function>
              <possibleOperations>
                <read>
                  <partial/>
                </read>
              </possibleOperations>
            </supportedFunction>
          </description>
        </featureInformation>
      </nodeManagementDetailedDiscoveryData>
    </cmd>
  </payload>
</datagram>
```

A.2.1.5 Example content of "nodeManagementSubscriptionRequestCall call [DeviceClassification]"

DeviceClassification subscription for Scenario 1.

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

Note: Currently, it is not possible to subscribe to parts of a feature. Therefore, a "nodeManagementSubscriptionRequestCall call" message must be used to create a full feature subscription. This means that if the Feature also contains data that is not relevant for the Use Cases supported by the subscriber, a subscriber might receive notifications with unsupported data. The subscriber shall ignore this data.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
  file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_CEM</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_HeatPump</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressDestination>
    <msgCounter>3</msgCounter>
    <cmdClassifier>call</cmdClassifier>
    <ackRequest>true</ackRequest>
    <timestamp>2021-08-11T11:19:05.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <nodeManagementSubscriptionRequestCall>
        <subscriptionRequest>
          <clientAddress>
            <entity>1</entity>
            <feature>1</feature>
          </clientAddress>
          <serverAddress>
            <entity>1</entity>
            <feature>8</feature>
          </serverAddress>
        </subscriptionRequest>
      </nodeManagementSubscriptionRequestCall>
    </cmd>
  </payload>
</datagram>
```

A.2.1.6 Example content of "resultData result [DeviceClassification subscription]"

DeviceClassification subscription result for Scenario 1.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
  file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_HeatPump</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_CEM</device>
      <entity>0</entity>
      <feature>0</feature>
    </addressDestination>
    <msgCounter>3</msgCounter>
    <msgCounterReference>3</msgCounterReference>
    <cmdClassifier>result</cmdClassifier>
    <timestamp>2021-08-11T11:19:06.0Z</timestamp>
```

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

```
  </header>
  <payload>
    <cmd>
      <resultData>
        <errorNumber>0</errorNumber>
      </resultData>
    </cmd>
  </payload>
</datagram>
```

A.2.2 Initial Scenario Communication

A.2.2.1 Example content of "deviceClassificationManufacturerData read"

deviceClassificationManufacturerData read for Scenario 1.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_CEM</device>
      <entity>1</entity>
      <feature>1</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_HeatPump</device>
      <entity>1</entity>
      <feature>8</feature>
    </addressDestination>
    <msgCounter>100</msgCounter>
    <cmdClassifier>read</cmdClassifier>
    <timestamp>2021-08-11T11:20:04.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <deviceClassificationManufacturerData/>
    </cmd>
  </payload>
</datagram>
```

A.2.2.2 Example content of "deviceClassificationManufacturerData reply"

deviceClassificationManufacturerData reply for Scenario 1.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_HeatPump</device>
      <entity>1</entity>
      <feature>8</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_CEM</device>
      <entity>1</entity>
      <feature>1</feature>
    </addressDestination>
    <msgCounter>60</msgCounter>
    <msgCounterReference>100</msgCounterReference>
    <cmdClassifier>reply</cmdClassifier>
    <timestamp>2021-08-11T11:20:05.0Z</timestamp>
  </header>
  <payload>
```

Copyright © 2024 EEBus Initiative e.V. All rights reserved.

```
    <cmd>
      <deviceClassificationManufacturerData>
        <deviceName>EEBUS Heat Pump Example Device</deviceName>
        <deviceCode>EEB09S1EU</deviceCode>
        <serialNumber>1234567890-09</serialNumber>
        <vendorName>EEBUS Initiative e.V.</vendorName>
        <brandName>EEBUS</brandName>
        <manufacturerNodeIdentification>EE987654321M1</manufacturerNodeIdentification>
      </deviceClassificationManufacturerData>
    </cmd>
  </payload>
</datagram>
```

A.2.3 Runtime Scenario Communication

A.2.3.1 Example content of "deviceClassificationManufacturerData notify"

deviceClassificationManufacturerData notify for Scenario 1.

This information usually does not change during runtime. The XML is listed here for the sake of completeness only.

```
<?xml version="1.0" encoding="UTF-8"?>
<datagram xmlns="http://docs.eebus.org/spine/xsd/v1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://docs.eebus.org/spine/xsd/v1
file:../../XSDs/EEBus_SPINE_TS_Datagram.xsd">
  <header>
    <specificationVersion>1.1.0</specificationVersion>
    <addressSource>
      <device>d:_i:46925_HeatPump</device>
      <entity>1</entity>
      <feature>8</feature>
    </addressSource>
    <addressDestination>
      <device>d:_i:46925_CEM</device>
      <entity>1</entity>
      <feature>1</feature>
    </addressDestination>
    <msgCounter>150</msgCounter>
    <cmdClassifier>notify</cmdClassifier>
    <timestamp>2021-08-11T11:20:50.0Z</timestamp>
  </header>
  <payload>
    <cmd>
      <deviceClassificationManufacturerData>
        <deviceName>EEBUS Heat Pump Example Device</deviceName>
        <deviceCode>EEB09S1EU</deviceCode>
        <serialNumber>1234567890-09</serialNumber>
        <vendorName>EEBUS Initiative e.V.</vendorName>
        <brandName>EEBUS</brandName>
        <manufacturerNodeIdentification>EE987654321M1</manufacturerNodeIdentification>
      </deviceClassificationManufacturerData>
    </cmd>
  </payload>
</datagram>
```

Copyright © 2024 EEBus Initiative e.V. All rights reserved.