

METRIC

MIL-DTL-38999/26G  
w/AMENDMENT 4  
11 August 2022

SUPERSEDING  
MIL-DTL-38999/26G  
w/AMENDMENT 3  
27 July 2021

## DETAIL SPECIFICATION SHEET

### CONNECTORS, ELECTRICAL, PLUG, CIRCULAR, THREADED, STRAIGHT, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of  
the Department of Defense.

The requirements for acquiring the product described herein shall consist  
of this specification sheet and MIL-DTL-38999.

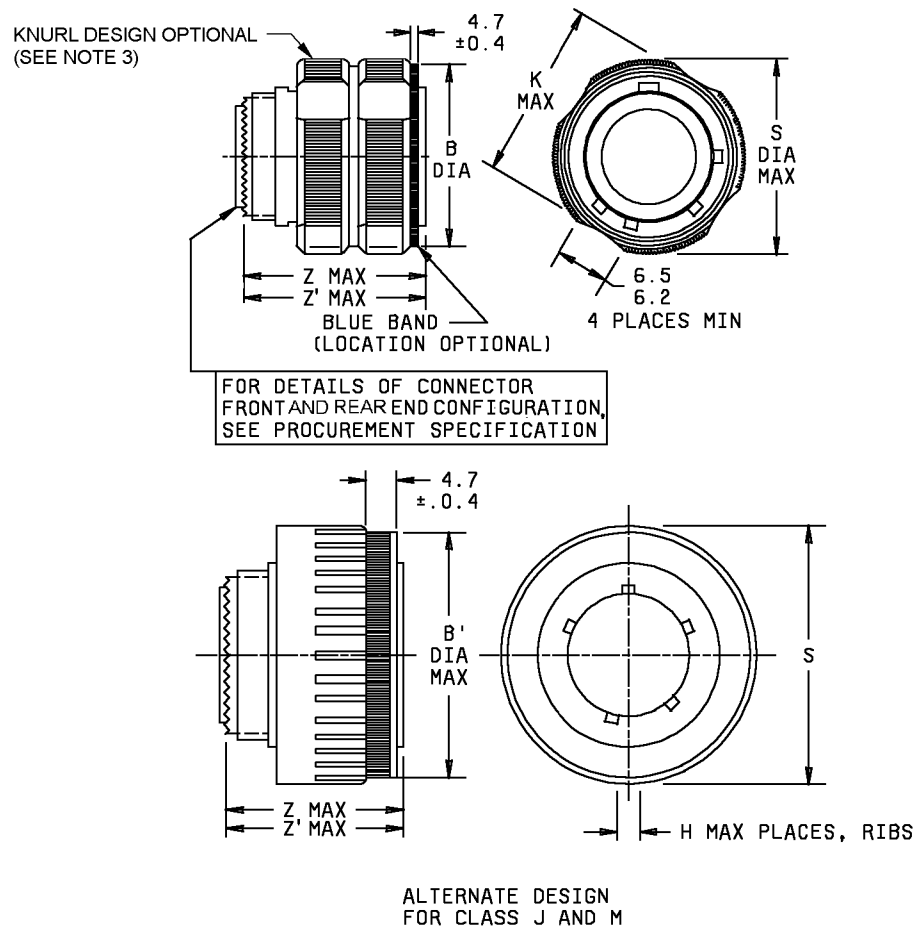


FIGURE 1. Plug.

AMSC N/A  
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5935



MIL-DTL-38999/26G  
w/AMENDMENT 4

| Shell size | Shell size code | B dia<br>+ 0.2<br>- 0.0 | B' dia max<br>(alternate design,<br>classes J and M only) | H max number<br>of ribs<br>(alternate design, classes J and M only) | K max          | S dia max       | Z max          | Z' max<br>(classes J and M only) | External bendir moment,<br>minimum,<br>classes J and I<br>(N-m) |
|------------|-----------------|-------------------------|-----------------------------------------------------------|---------------------------------------------------------------------|----------------|-----------------|----------------|----------------------------------|-----------------------------------------------------------------|
| 9          | A               | 18.4<br>(.724)          | 20.6<br>(.811)                                            | 12                                                                  | 19.0<br>(.748) | 21.8<br>(.858)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 8.865                                                           |
| 11         | B               | 21.1<br>(.830)          | 23.6<br>(.929)                                            | 14                                                                  | 21.9<br>(.862) | 25.0<br>(.984)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 29.492                                                          |
| 13         | C               | 25.4<br>(.999)          | 28.2<br>(1.11)                                            | 16                                                                  | 26.1<br>(1.03) | 29.4<br>(1.157) | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 34.485                                                          |
| 15         | D               | 28.7<br>(1.129)         | 31.3<br>(1.23)                                            | 18                                                                  | 29.3<br>(1.15) | 32.5<br>(1.27)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 40.566                                                          |
| 17         | E               | 32.2<br>(1.26)          | 34.5<br>(1.35)                                            | 20                                                                  | 32.8<br>(1.29) | 35.7<br>(1.40)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 50.781                                                          |
| 19         | F               | 34.9<br>(1.37)          | 37.3<br>(1.46)                                            | 22                                                                  | 35.5<br>(1.39) | 38.5<br>(1.51)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 51.450                                                          |
| 21         | G               | 38.1<br>(1.49)          | 40.5<br>(1.59)                                            | 24                                                                  | 38.7<br>(1.52) | 41.7<br>(1.64)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 80.941                                                          |
| 23         | H               | 41.1<br>(1.61)          | 43.7<br>(1.72)                                            | 26                                                                  | 41.7<br>(1.64) | 44.9<br>(1.76)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 69.810                                                          |
| 25         | J               | 44.3<br>(1.74)          | 46.8<br>(1.84)                                            | 28                                                                  | 44.9<br>(1.76) | 48.0<br>(1.88)  | 31.0<br>(1.22) | 31.5<br>(1.240)                  | 91.310                                                          |

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.
3. Knurl design: Straight pattern, or "flute", design optional, provided the design includes the specified flat or scalloped "4 places min" areas between the knurled areas. For the alternate design for classes J and M, the design shall include "H MAX" number of ribs. The minimum length of flats between knurls on the outside diameter of the coupling nut shall be at least 2/3 the length of the coupling nut. For classes T and Z only, knurled areas on the coupling nut may be omitted, provided the minimum number of specified flat or scalloped areas are included.
4. Dimensions B' and Z' are for classes J and M, only. Dimensions B and Z are for all other classes.

FIGURE 1. Plug - Continued.

MIL-DTL-38999/26G  
w/AMENDMENT 4

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall be in accordance with MIL-DTL-38999.

This connector mates with MIL-DTL-38999/20, /21, /22, /23, /24, /25 and /27.

For insert arrangements: See MIL-STD-1560.

Connector accessories: SAE-AS85049.

Part or Identifying Number (PIN) example:

|                |                                                          |          |          |           |          |          |
|----------------|----------------------------------------------------------|----------|----------|-----------|----------|----------|
| <u>D38999/</u> | <u>26</u>                                                | <u>W</u> | <u>A</u> | <u>35</u> | <u>P</u> | <u>N</u> |
| <u>D38999/</u> | DoD number prefix                                        |          |          |           |          |          |
| <u>26</u>      | Specification sheet number                               |          |          |           |          |          |
| <u>W</u>       | Class                                                    |          |          |           |          |          |
| <u>A</u>       | Shell size code                                          |          |          |           |          |          |
| <u>35</u>      | Insert arrangement                                       |          |          |           |          |          |
| <u>P</u>       | Contact style                                            |          |          |           |          |          |
| <u>N</u>       | Polarizing positions (N is required for normal position) |          |          |           |          |          |

Class F is not for Navy use and is inactive for Air Force new design use.

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

Note: Bending moment torque (class J and M). Details of bending moment torque requirements may be found in MIL-DTL-38999/20. Plug requirements were set at the requirements of the flange mounted receptacles (MIL-DTL-38999/20, representing the strongest mating partner for the plug).

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560  
MIL-DTL-38999/20  
MIL-DTL-38999/21  
MIL-DTL-38999/22  
MIL-DTL-38999/23  
MIL-DTL-38999/24  
MIL-DTL-38999/25  
MIL-DTL-38999/27  
SAE-AS85049

MIL-DTL-38999/26G  
w/AMENDMENT 4

CONCLUDING MATERIAL

Custodians:

Army – CR  
Navy - AS  
Air Force – 85  
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2022-184)

Review activities:

Army - AR, MI  
Navy - EC, MC, OS  
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.