

METRIC

MIL-DTL-38999/41B
w/AMENDMENT 1
2 July 2024
SUPERSEDING
MIL-DTL-38999/41B
8 September 2010

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE,
BOX MOUNTING FLANGE, HERMETIC, BREECH COUPLING,
HERMETIC SOLDER CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-38999.

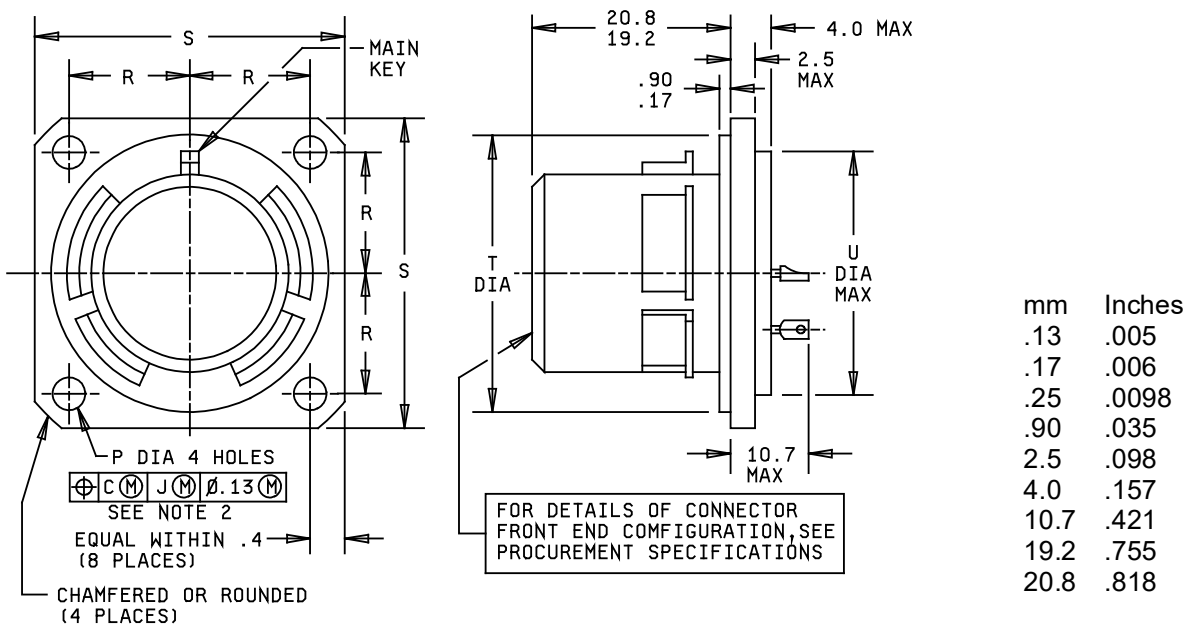


FIGURE 1. Receptacle, classes N and Y.

MIL-DTL-38999/41B
w/AMENDMENT 1

Shell size	Shell size code	P dia	R BSC	S	T dia	U dia max
11	B	3.5 (.137) 3.1 (.122)	10.31 (.405)	26.7 (1.05) 25.6 (1.00)	20.15 (.793) 19.76 (.777)	15.88 (.625)
13	C		11.51 (.453)	29.1 (1.14) 28.0 (1.10)	23.35 (.919) 22.96 (.903)	19.05 (.789)
15	D		12.31 (.484)	31.5 (1.24) 30.4 (1.19)	26.52 (1.04) 26.13 (1.02)	23.01 (.905)
17	E		13.49 (.531)	33.9 (1.33) 32.8 (1.291)	29.72 (1.17) 29.33 (1.15)	25.81 (1.01)
19	F		14.68 (.577)	37.1 (1.46) 36.0 (1.41)	32.87 (1.29) 32.48 (1.27)	28.98 (1.14)
21	G		15.88 (.625)	40.2 (1.58) 39.1 (1.53)	36.05 (1.41) 35.66 (1.40)	32.16 (1.26)
23	H	4.0 (.157) 3.6 (.141)	17.46 (.687)	43.4 (1.70) 42.3 (1.66)	39.22 (1.54) 38.83 (1.52)	34.93 (1.37)
25	J		19.05 (.749)	46.6 (1.83) 45.5 (1.79)	42.40 (1.66) 42.01 (1.65)	37.69 (1.48)

NOTES:

1. Dimensions are in millimeters.
2. The gage features for "J" shall be 0.25 mm (.010 in) larger than the maximum material condition (mmc) size at basic location.
3. Inch-pound conversion are provided in parentheses for information only.

FIGURE 1. Receptacle, classes N and Y - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/46 and /47.

Main key color: Blue.

MIL-DTL-38999/41B
w/AMENDMENT 1

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

	<u>D38999/</u>	<u>41</u>	<u>N</u>	<u>B</u>	<u>35</u>	<u>P</u>	<u>N</u>
DOD no. prefix	_____	_____	_____	_____	_____	_____	_____
Specification sheet no.	_____	_____	_____	_____	_____	_____	_____
Class	_____	_____	_____	_____	_____	_____	_____
Shell size code	_____	_____	_____	_____	_____	_____	_____
Insert arrangement	_____	_____	_____	_____	_____	_____	_____
Contact style	_____	_____	_____	_____	_____	_____	_____
P – Pin, Solder cup. X – Pin, Eyelet.							
Polarizing position:	_____						
N is required for normal position.							

For contact termination: See MIL-DTL-38999.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-38999/46
MIL-STD-38999/47
MIL-STD-1560

MIL-DTL-38999/41B
w/AMENDMENT 1

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2024-143)

Review activities:

Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.