

METRIC


MIL-DTL-38999/50C
w/AMENDMENT 1
2 July 2024
SUPERSEDING
MIL-DTL-38999/50C
5 February 2014

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, DUMMY STOWAGE, BREECH COUPLING, SERIES IV, METRIC

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-38999.

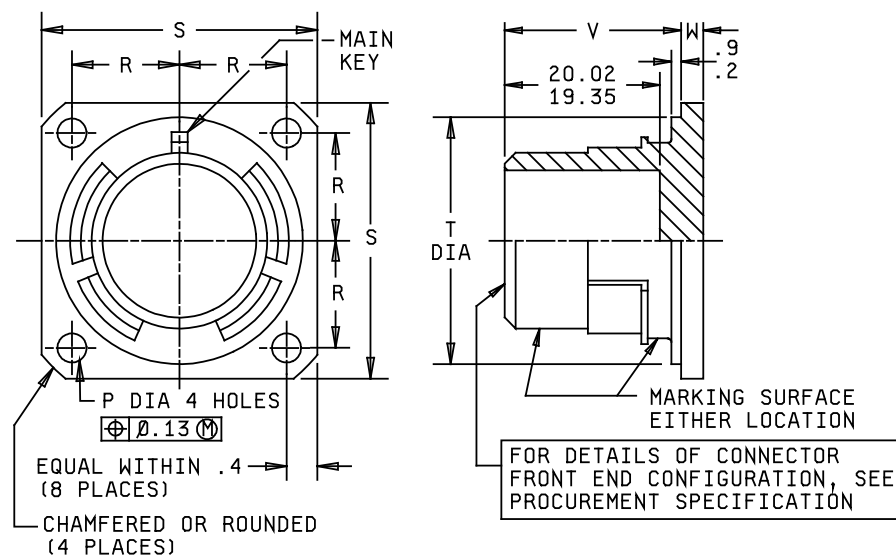

mm	Inches	mm	Inches
0.13	.005	0.90	.035
0.40	.016	20.02	.788

FIGURE 1. Dummy receptacle, classes T, W, X and Z.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5935

MIL-DTL-38999/50C
w/AMENDMENT 1

Shell size	Shell size code	P dia	R BSC	S	T dia	V	W
11	B	3.5 / 3.1 (.138/.122)	10.31 (.406)	26.7 / 25.6 (1.05/1.01)	20.15 / 19.76 (.793/.778)	20.8/ 19.2 (.819/ .756)	2.6/ 2.1 (.102/ .083)
13	C		11.51 (.453)	29.1 / 28.0 (1.15/1.10)	23.35 / 22.96 (.919/.904)		
15	D		12.31 (.485)	31.5 / 30.4 (1.24/1.20)	26.52 / 26.13 (1.04/1.03)		
17	E		13.49 (.531)	33.9 / 32.8 (1.33/1.29)	29.72 / 29.33 (1.17/1.15)		
19	F		14.68 (.578)	37.1 / 36.0 (1.46/1.42)	32.87 / 32.48 (1.29/1.28)		
21	G	4.0 / 3.6 (.157/.142)	15.88 (.625)	40.2 / 39.1 (1.58/1.54)	36.05 / 35.66 (1.42/1.40)		3.4/ 2.9 (.134/ .114)
23	H		17.46 (.687)	43.4 / 42.3 (1.71/1.67)	39.22 / 38.83 (1.54/1.53)		
25	J		19.05 (.750)	46.6 / 45.5 (1.83/1.79)	42.40 / 42.01 (1.67/1.65)		

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.
3. Flange is solid.
4. Dummy receptacles are used when unmated plugs must be protected.

FIGURE 1. Dummy receptacle, classes T, W, X and Z – Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999, except one design shall accommodate all polarization positions (within its shell size).

This receptacle mates with MIL-DTL-38999/46 and /47.

Shell material and finish shall be as specified in MIL-DTL-38999.

MIL-DTL-38999/50C
w/AMENDMENT 1

Qualification (all classes). Qualification shall be in accordance with MIL-DTL-38999, conducted on two samples of each shell size, except only the following sequence of tests shall be required:

Examination of product
Dynamic salt spray (corrosion)
Coupling torque
Air leakage (see requirement)
Visual and mechanical

Group A sampling inspection. Sampling for group A inspection shall be as specified in table I.

TABLE I. Group A sampling plan.

Lot size	Sampling size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units
3,201 and up	54 units

Part or Identifying Number (PIN) example:

D38999/50
Specification
sheet number

B
Shell
size

W
Class

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46
MIL-DTL-38999/47

MIL-DTL-38999/50C
w/AMENDMENT 1

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2024-149)

Review activities:

Army - MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.