BATCH-11

PROJECT NAME: BATTERY CHARGING FORM SOLARPANEL ROLL

NUMBERS:

21781A0411-A.SUDHEER

21781A0416- B.BHARATH

21781A0418-B K CHARAN

21781A0454-D.KARTHIK

AIM:

To create a functional battery charagingsystem using a solar panel in cisco packet tracer.

PROBLEM STATEMENT:

Design and simulate a system where a solar panel generates electricity and charges a battery.

SCOPE OF THE SOLUTION:

- Simulate the solar panel as an energy source.
- Simulate the battery as an energy storage unit.
- Implement a charge controller to regulate energy flow.
- Monitor power flow and observe the charging process.


REQUIRED COMPONENTS:

- 1. Solar panel: Represents the solar energy source.
- 2. Battery: Represent the energy storage.
- 3. Power meter: Monitor power flow.

- 4. Switch: Control the power flow.
- 5. Server: Network for computer.
- 6. PC: Personal computer.
- 7. Led: Light emitting diode.
- 8. IOT Custom cable: connecting the divices
- 9. Copper straight -through wire: To connect the solar panel and power meter and battery and led.

SIMULATED CIRCUIT:

- 1. Connect the solar panel to the power meter '
- 2. Power meter is connected to the battery.
- 3. Battery is connected to the led light.
- 4. Switch is connected to the PC, Server, solar panel, battery, power meter.

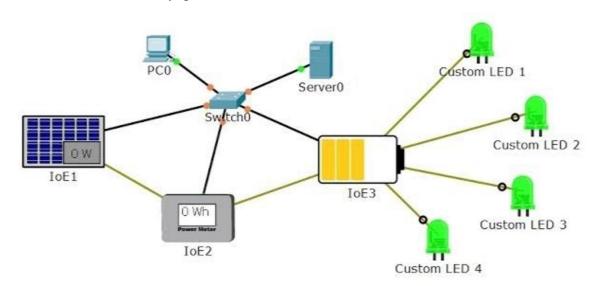

CONCLUSION:

The battery system that was designed and set up in this project is a working system that can be used to charge a battery using energy from a solar panel. The system is easy to set up and use, and it can be used to power devices even when there is no access to the grid.