

TECHNICAL DRAWING | SDN-204 FLOAT SWITCH | SHRIDHAN SENSORTEK

NOTES:

- 1. Switch changes form on FALLING level at D2.
- 2. Reference from Collar bottom.
- 3. Switch tolerance: +/- 2 mm
- 4. Qty: 01 No.

ADAPTER DETAILS:


- 2 BSP (M)
- Outer Dia: 69 mm
- HEX: 36 A/F
- O-Ring groove @ 10mm
- 1/4 BSP(M) side port

CABLE GLAND:

- M-20, Side mounted
- Dia: 20 mm
- Protrusion: 30 mm

ENCLOSURE:

- Dia: 85 mm
- Height: 58 mm
- Cone H: 35 mm

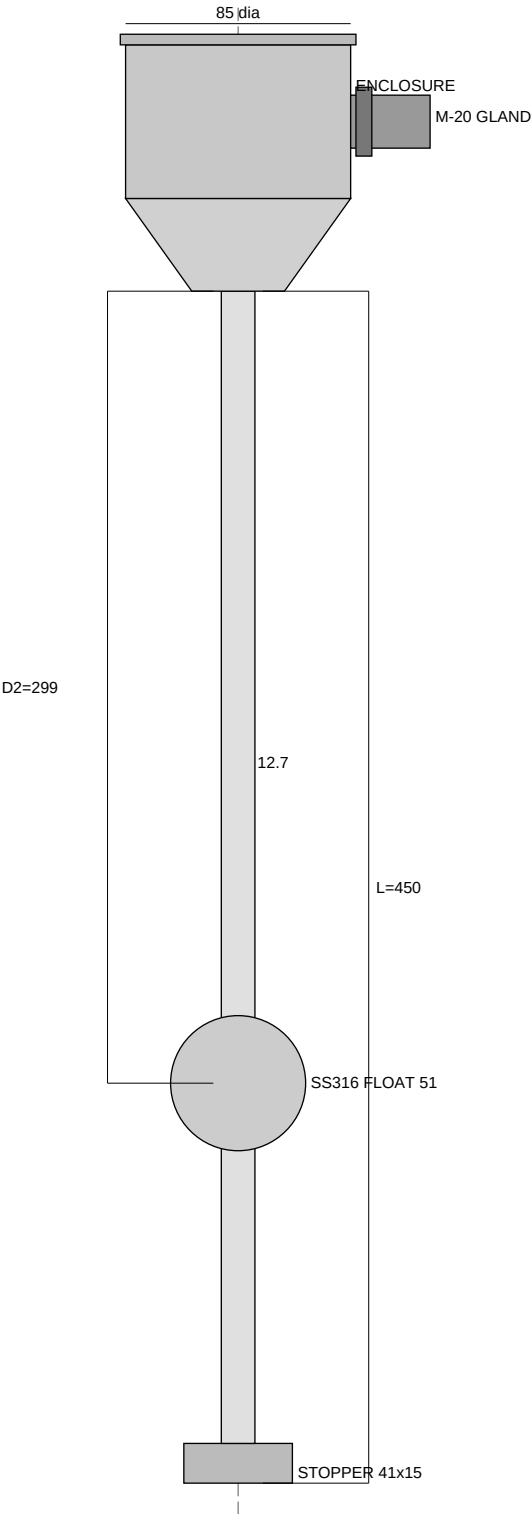

SHRIDHAN SENSORTEK PVT. LTD.

COPY RIGHT & CONFIDENTIAL

Not to be reproduced without written permission.

FLOAT SWITCH

MODEL: SDN-204 | SS 316

ELECTRICAL SPECIFICATION:

- CONTACT FORM : SPDT (1NO + 1NC)
- VOLTAGE : 250VAC / 500VDC
- CURRENT MAX : 1.5A
- CONTACT VA : 50VA MAX
- MATERIAL : SS 316

DIMENSIONS & INFO:

- L = 450 mm (Total Length)
- D2 = 299 mm (Falling Switch Point)
- STEM DIA = 12.7 mm
- FLOAT DIA = 51 mm SS316
- STOPPER = 41 x 15 mm
- ENCLOSURE = 85 dia x 58 mm
- CONE HT = 35 mm
- GLAND = M20 x 30 mm