



SHRIDHAN SENSORTEK PVT. LTD.
Not to be reproduced without written permission.

COPY RIGHT & CONFIDENTIAL

This document is the exclusive property of SHRIDHAN SENSORTEK and contains confidential information . This document or its contents shall not be used, reproduced or disclosed in whole or in part , without prior written permission of SHRIDHAN SENSORTEK. This document and all its copies shall be returned to SHRIDHAN SENSORTEK on demand

FLOAT SWITCH

MODEL: SDN-204 | SS 316

ELECTRICAL SPECIFICATION:

CONTACT FORM	: SPDT (1NO + 1NC)
VOLTAGE	: 250VAC / 500VDC
SWITCHING CURRENT MAX.	: 1.5A
CONTACT VA MAXIMUM	: 50VA MAX
MATERIAL	: SS 316

DIMENSIONS & INFO:

L = 300 mm (Total Length)
D2 = 100 mm (Falling Switch Point)
STEM DIA = 12.7 mm
FLOAT DIA = 52 mm SS316
STOPPER = 41 x 15 mm
ENCLOSURE = 100 dia x 90 mm (Cast.Al)
CONE HT = 40 mm
GLAND = M20 x 30 mm

ADAPTER DETAILS:


- 2 BSP (M)
- Outer Dia: 69 mm
- HEX: 36 A/F
- O-Ring groove @ 10mm
- 1/4 BSP(M) side port

CABLE GLAND:

- M-20, Side mounted
- Dia: 20 mm
- Protrusion: 30 mm

NOTES:

1. Switch changes form on FALLING level at D2.
2. Reference from Collar bottom.
3. Switch tolerance: +/- 2 mm
4. Qty: 01 No.

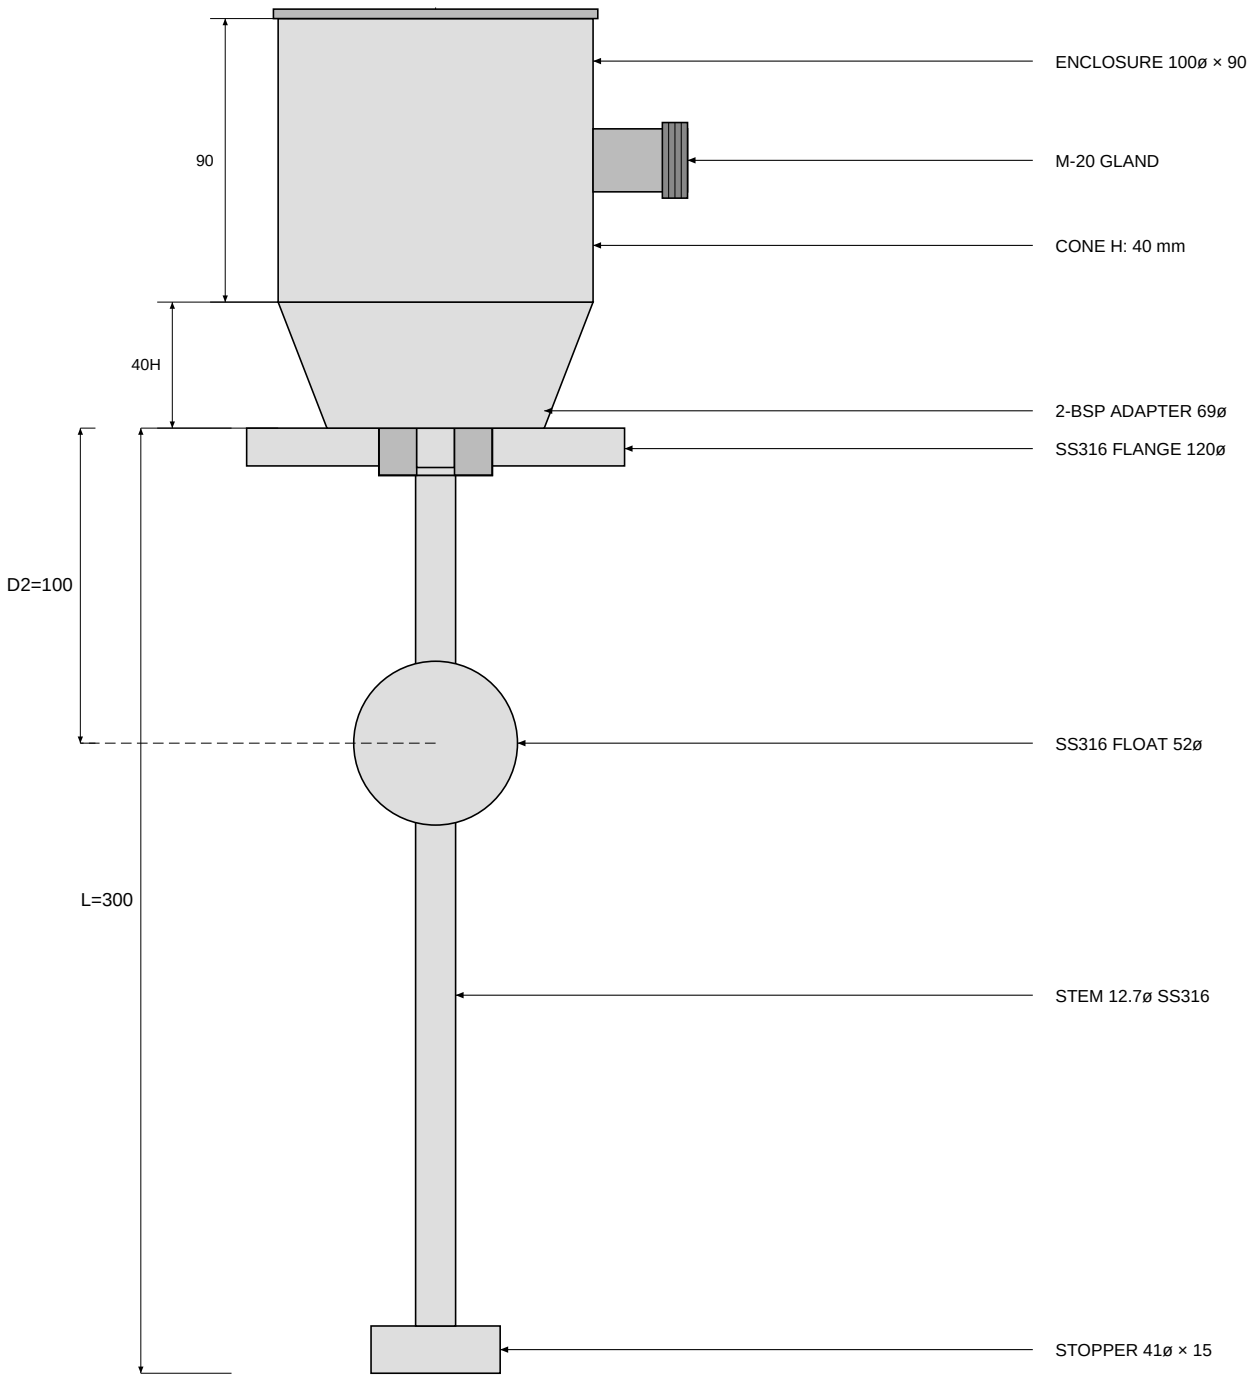

SL NO.	DESCRIPTION	QTY	MATERIAL	SIZE
1	STEM	1	SS316	12.7ø × 285L
2	FLOAT	1	SS316	52ø
3	STOPPER	1	SS316	41ø × 15
4	FLANGE	1	SS316	120ø × 12
5	ENCLOSURE	1	Cast.Al	100ø × 90

	All Dimensions in mm		DRG NO: SDN-204-001 REV: A UNITS: mm			
			Ro	Rev	Description	EUROPE
S SHRIDHAN — SENSORTEK —	Scale :NTS TM	Customer Name :			End User :	
			Cust Ref :		SO No. :	
	Projection : 	Project:				