NaCs lab update

Yichao Yu

Ni Group/Harvard

March 24, 2017

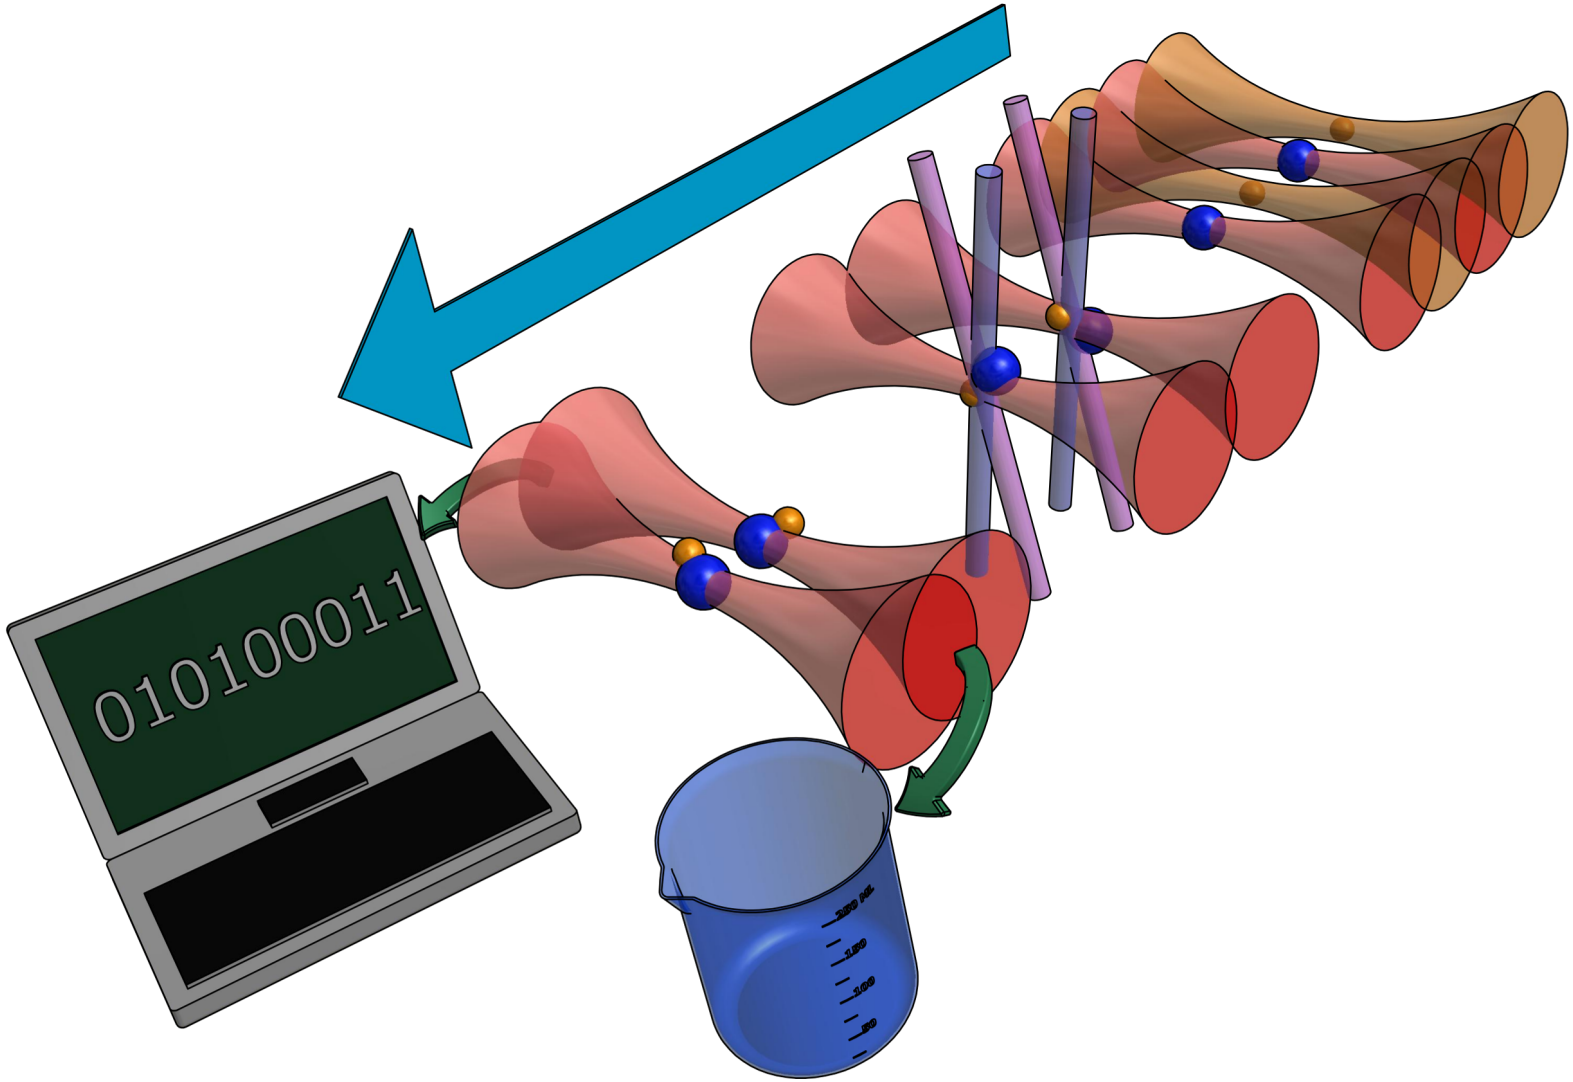
010100011

Raman sideband cooling of Sodium

- Setup

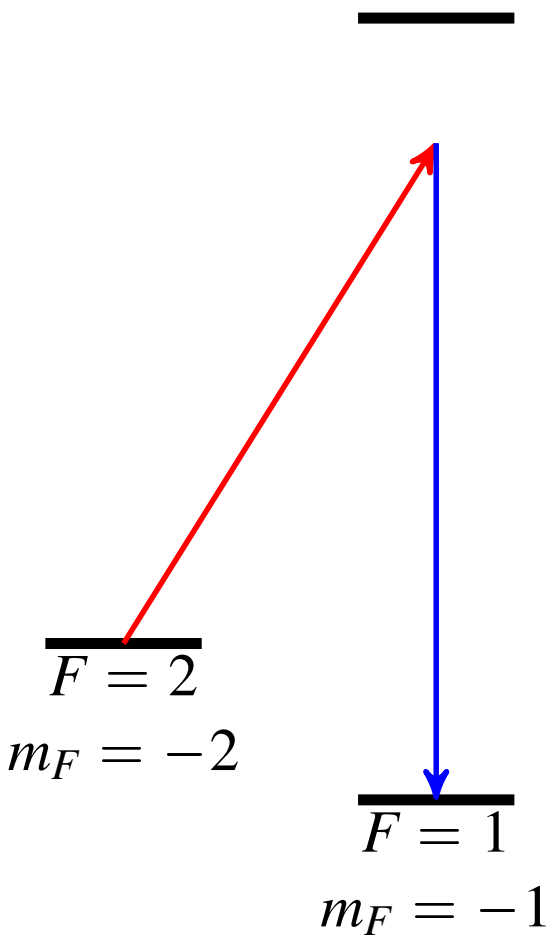

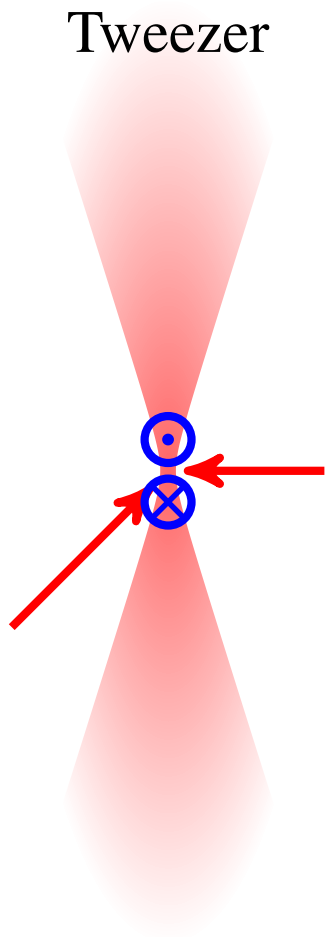

Raman sideband cooling of Sodium

- Setup

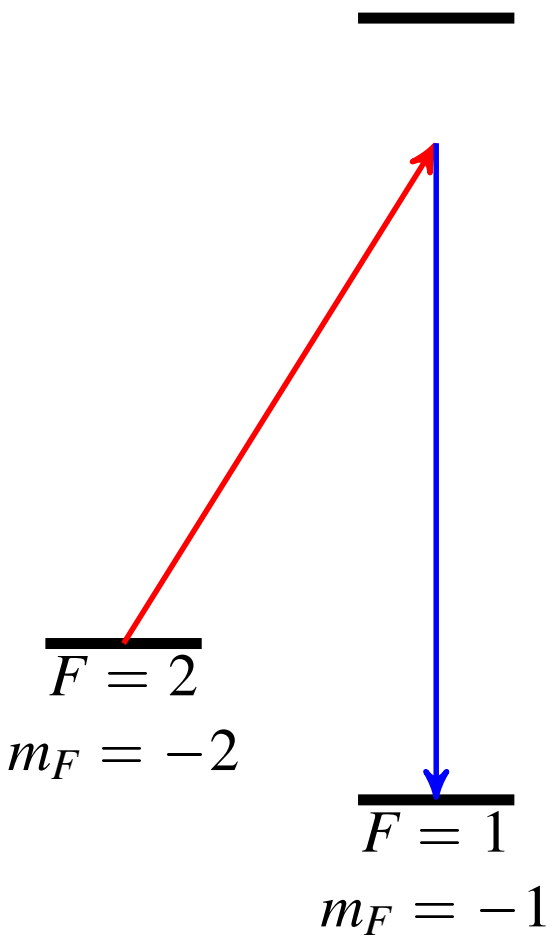

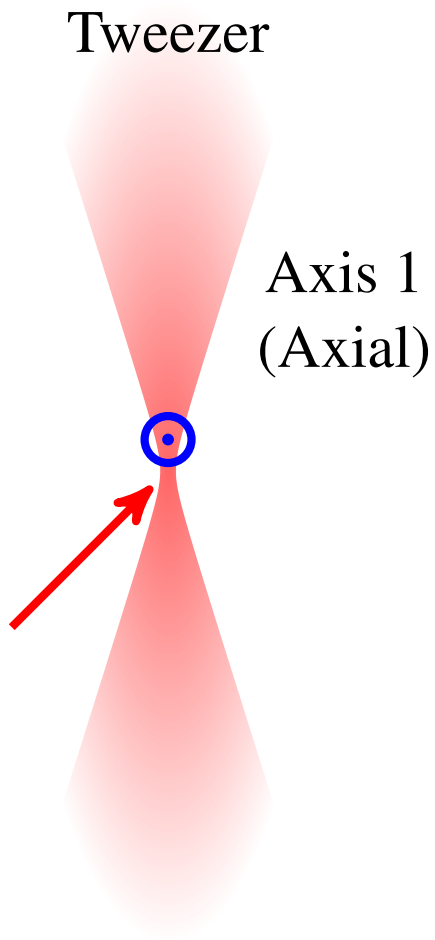

Raman sideband cooling of Sodium

- Setup

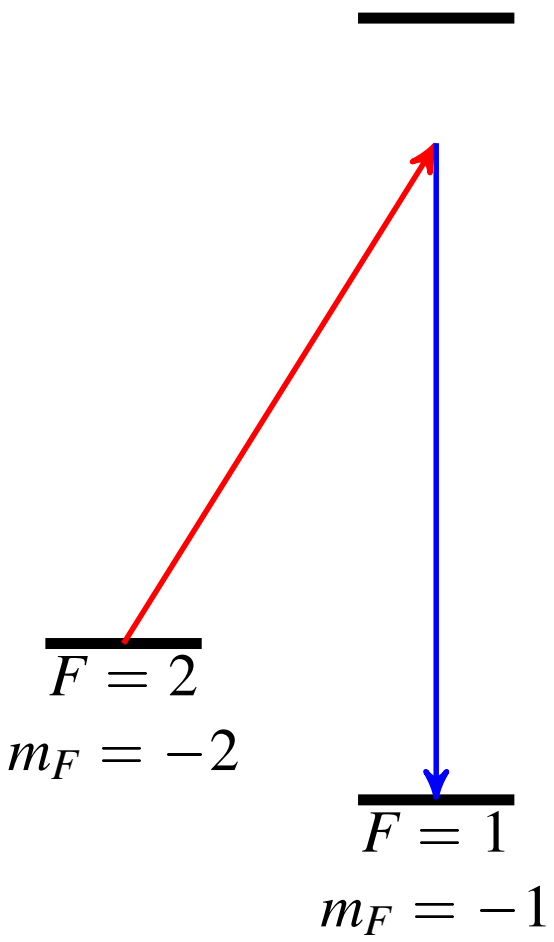

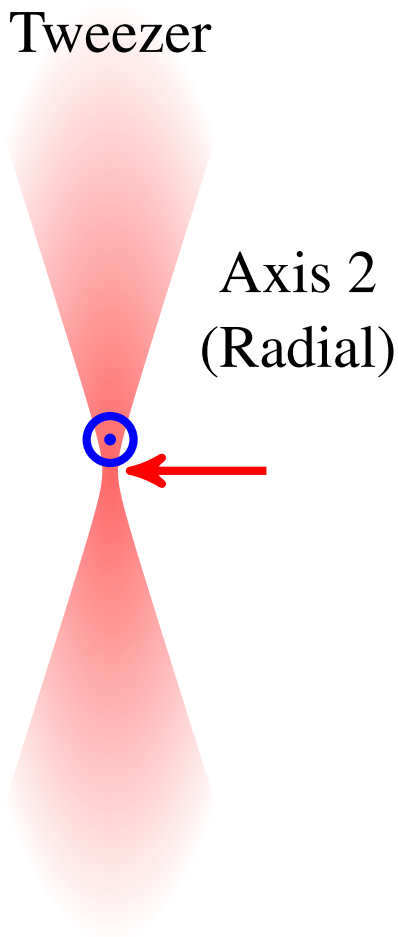

Raman sideband cooling of Sodium

- Setup

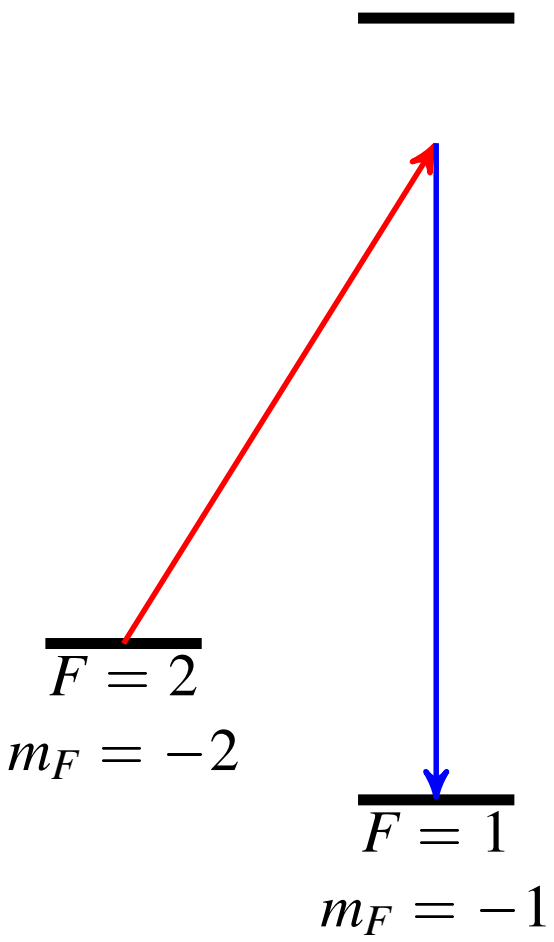

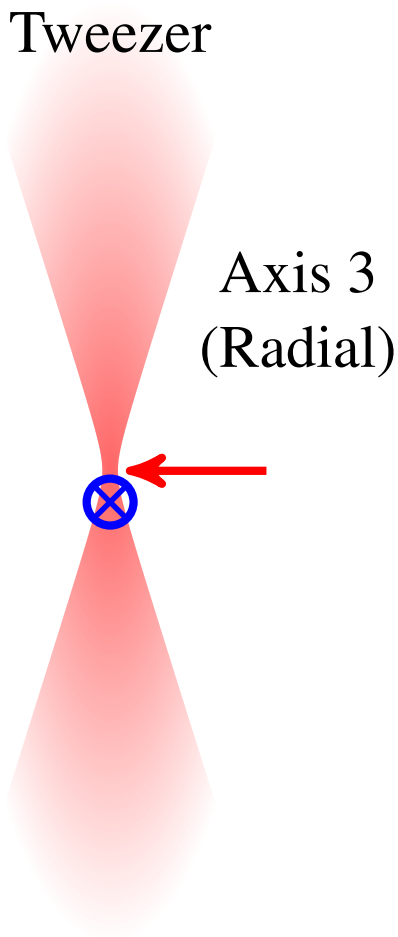

Raman sideband cooling of Sodium

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

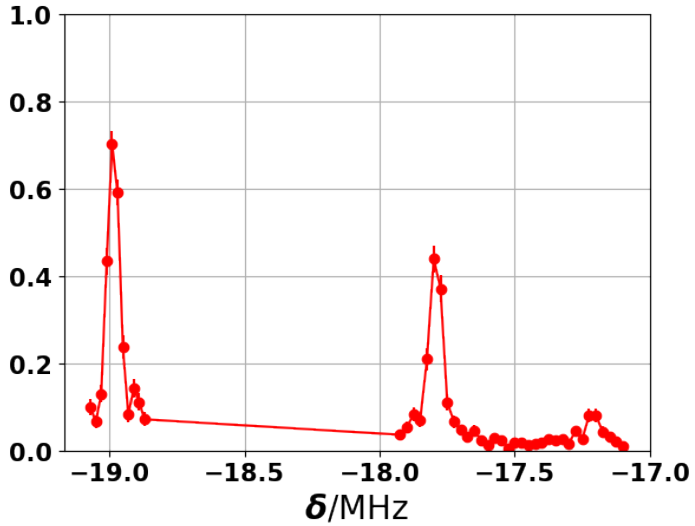

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Improvements

- Stabilize trap power
- Add Raman beam for axis 3
- Increase Rabi frequency
- Simulation

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

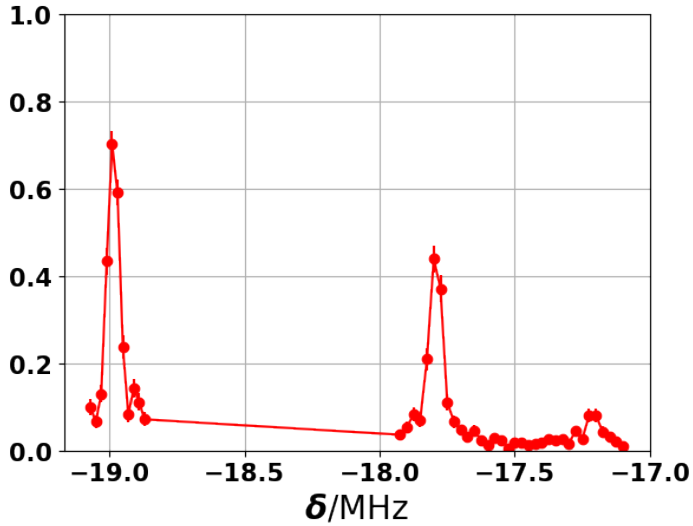

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Improvements

- Stabilize trap power
- Add Raman beam for axis 3
- Increase Rabi frequency
- Simulation

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

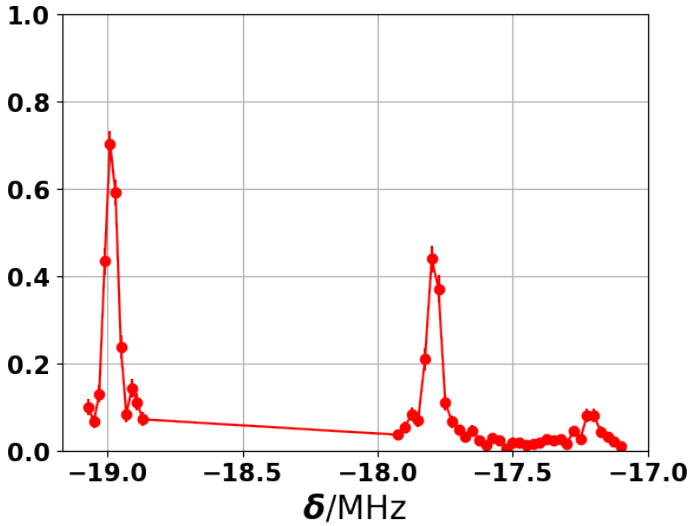

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Improvements

- Stabilize trap power
- Add Raman beam for axis 3
- Increase Rabi frequency
- Simulation

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

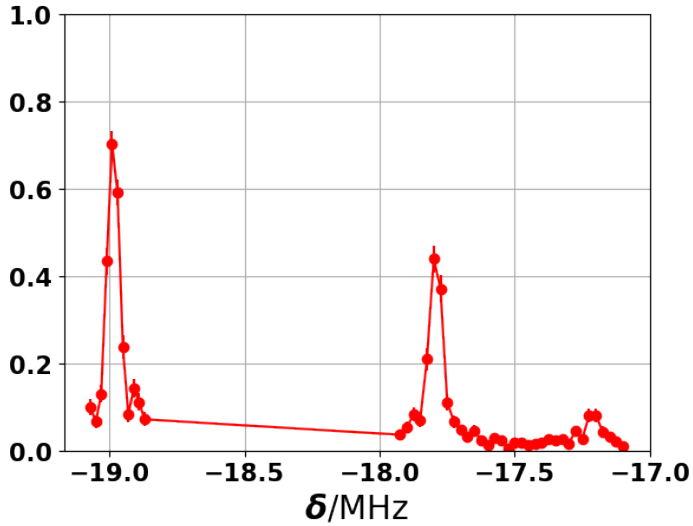

Raman sideband cooling of Sodium

Difficulties

- High initial temperature ($40\mu K$)
- High Lamb-Dicke parameter
- Trap anharmonicity

Improvements

- Stabilize trap power
- Add Raman beam for axis 3
- Increase Rabi frequency
- Simulation

Trap parameters

Axis	ν/kHz	η
1 (axial)	67	0.43
2 (radial)	420	0.35
3 (radial)	580	0.29

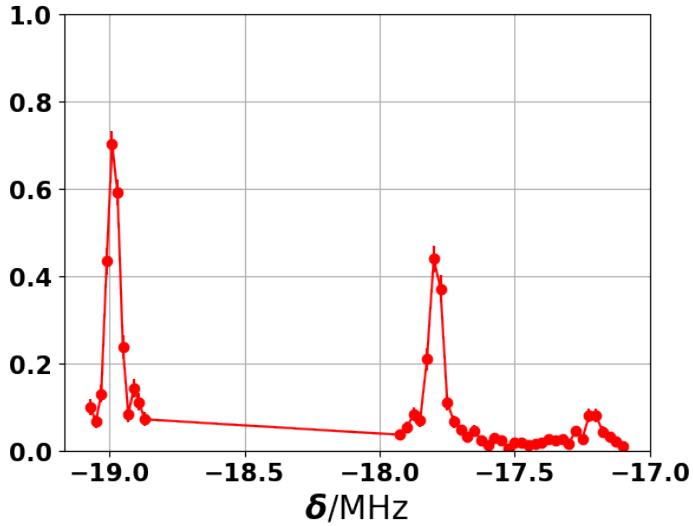

Cooling sequence

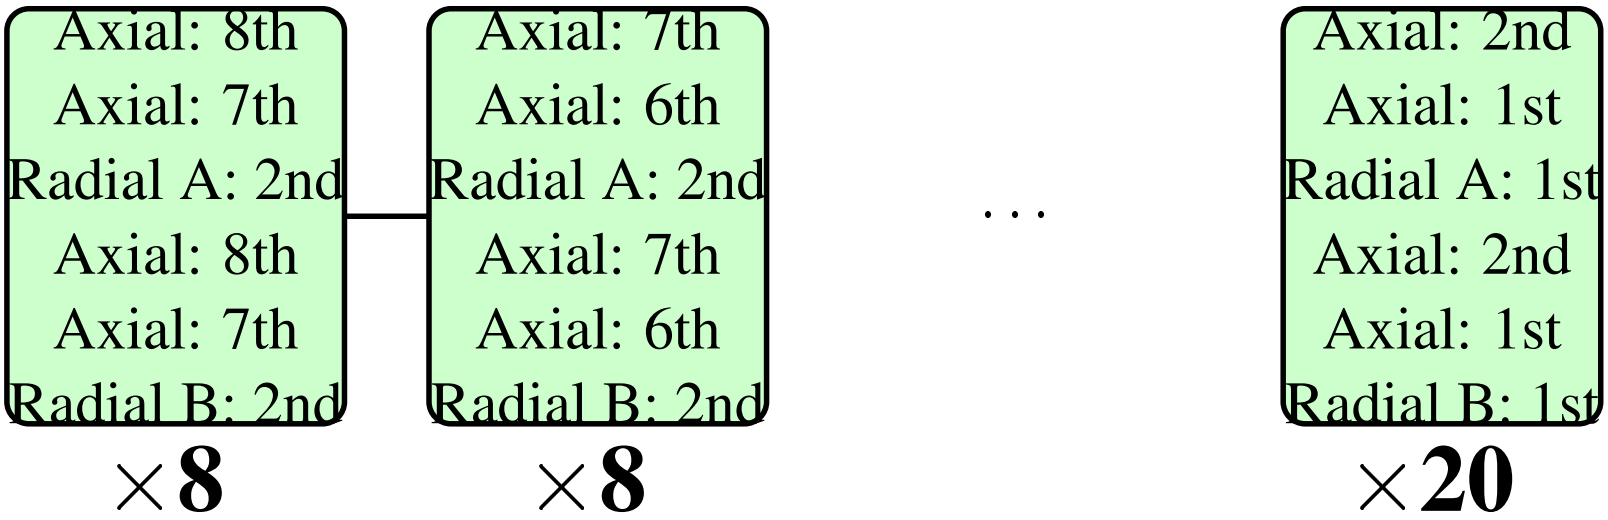

Status

- Radial-only cooling
- Axial-only cooling
- 3D cooling
  (Survival: $\approx 89\%$)

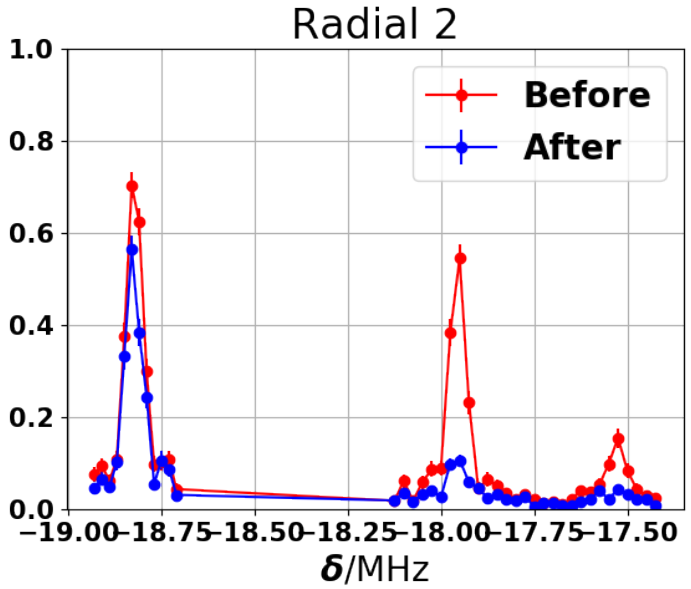

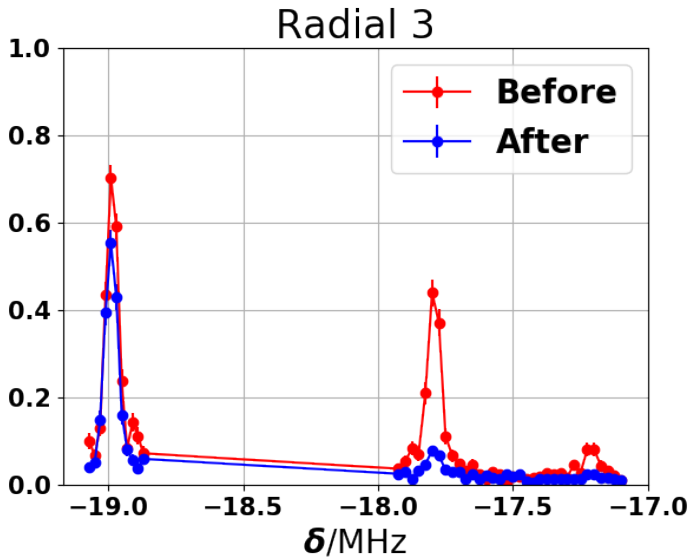

Status

- Radial-only cooling
- Axial-only cooling
- 3D cooling
  (Survival: ≈ 89%)

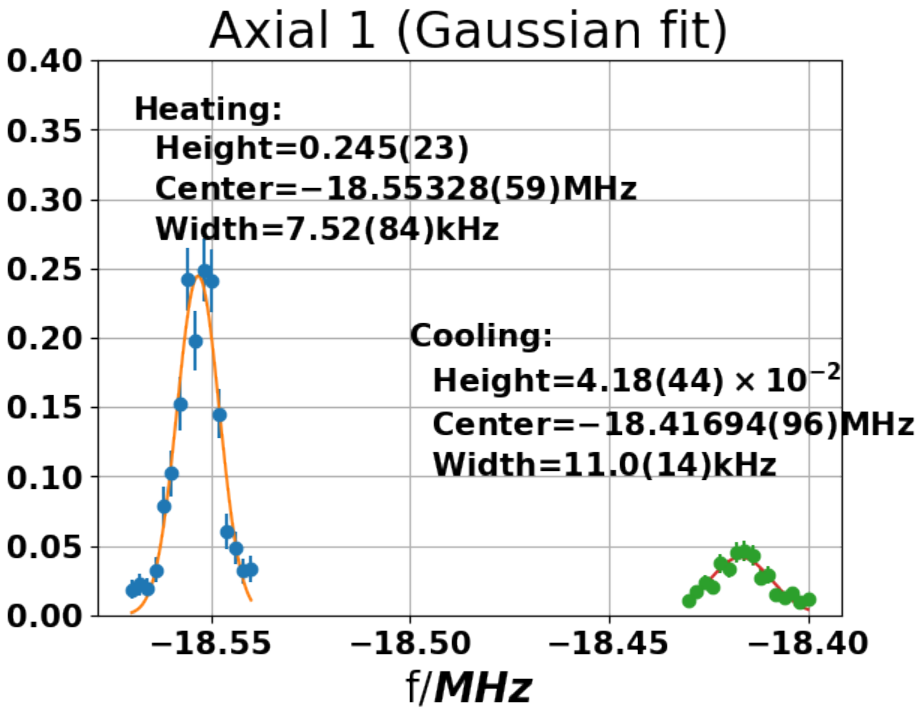

Status

- Radial-only cooling
- Axial-only cooling
- 3D cooling
  (Survival: $\approx 89\%$)

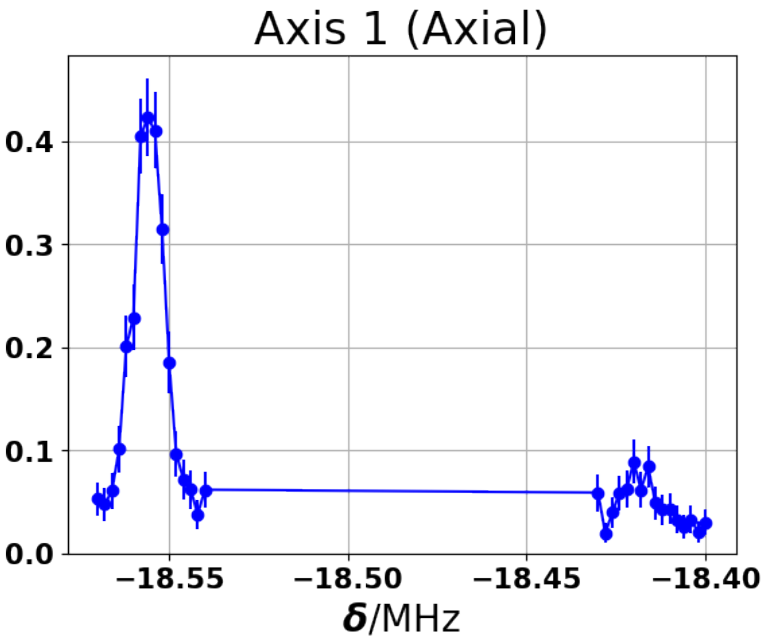

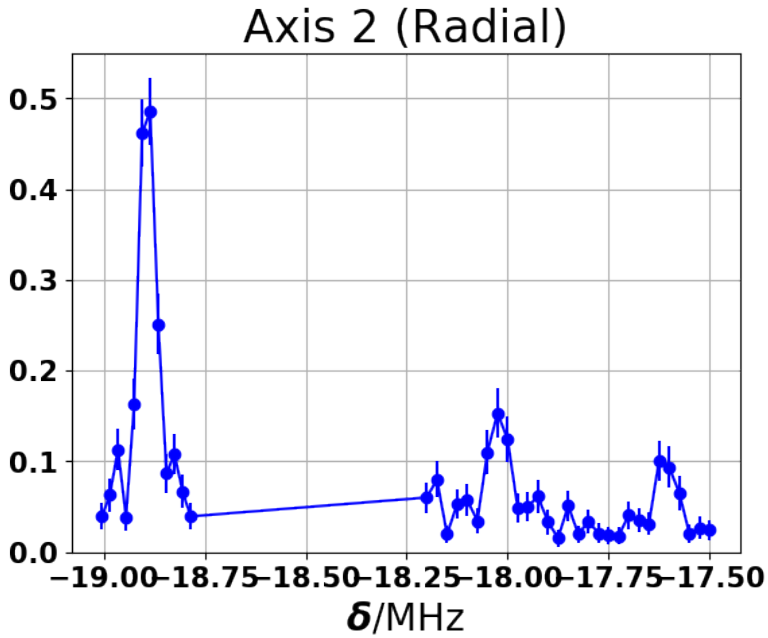

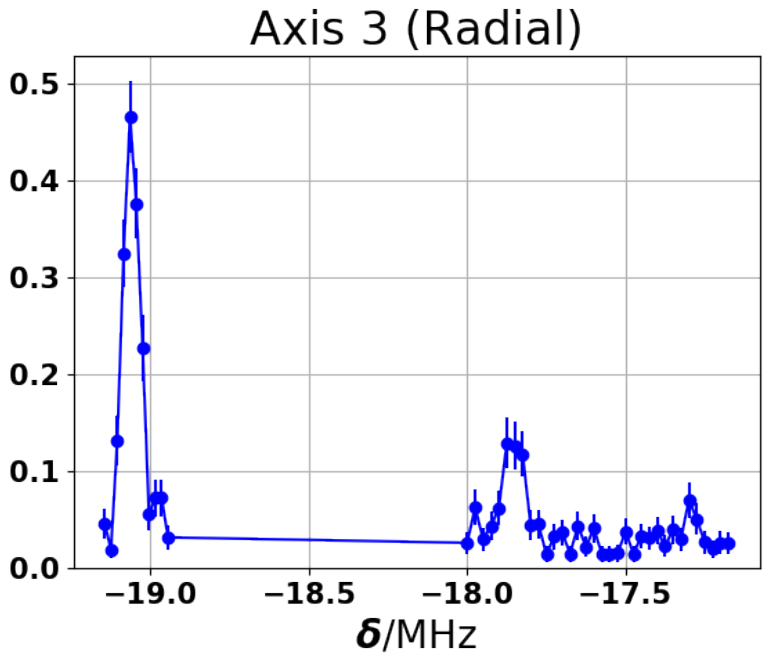

Axial matrix element

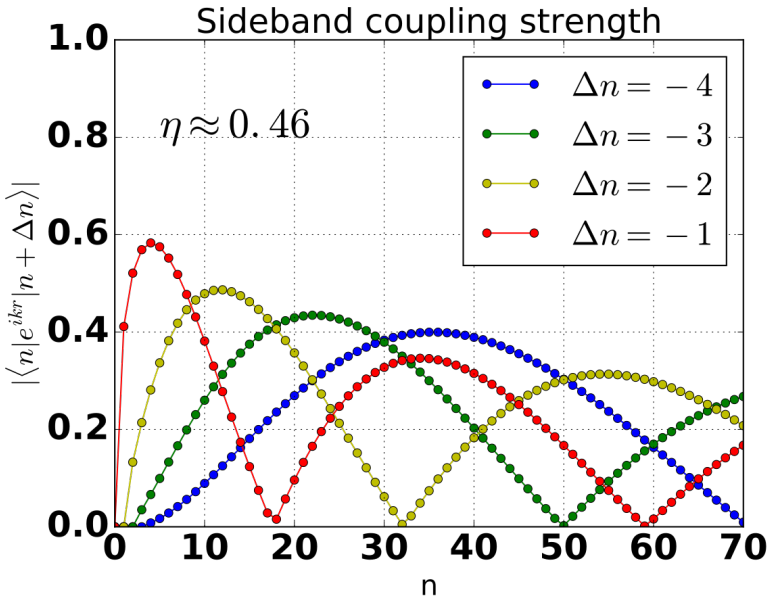

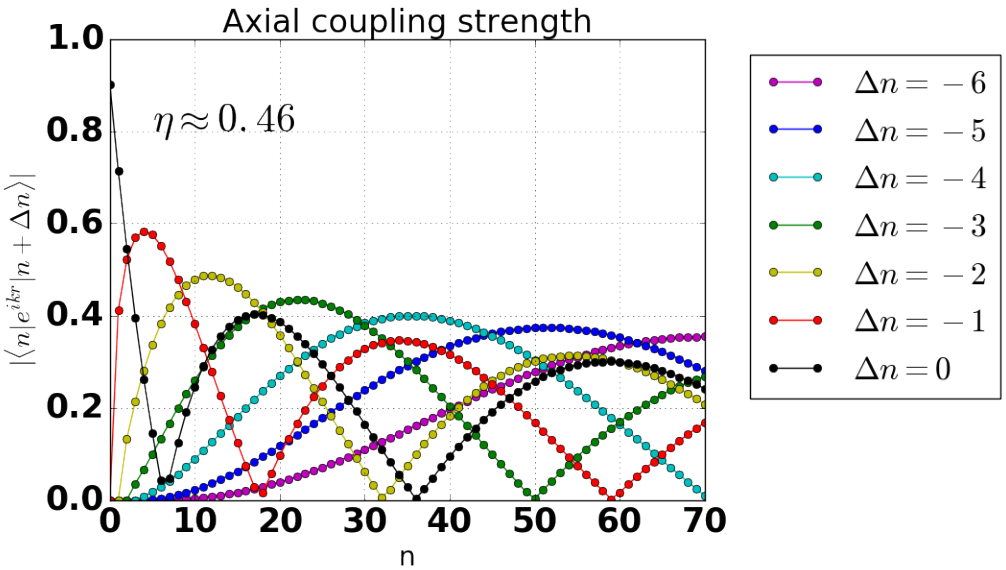
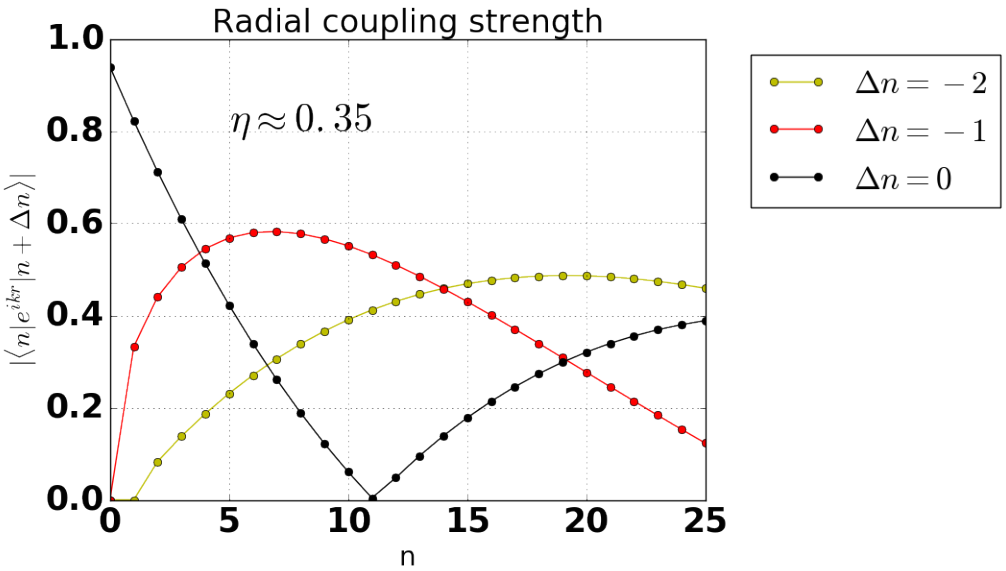
Radial matrix element