



Rita pad's range of accessories meet high international standards. Since each product is unique in its own way, Rita Pad offers accessories to suit your own particular need.

Special inks, high quality long lasting pads, cliché plates that give up to a million impressions, training, are a part of the complete pad printing solution offered by Rita Pad, the only company in the country to do so.

Rita Pad's corporate thinking is geared to providing the customer with a simple user friendly solution and a lifetime of product and service support.


It is simple things like these that make us the no 1. Pad printing company in India

Precision engineered pads with custom built options, a range of hardness and different modular designs to suit every printing need, specially developed raw materials ensure low cost per use and millions of high quality impressions.


Our pads set quality standards in the industry with over 100 designs.



MLM 100D-GF

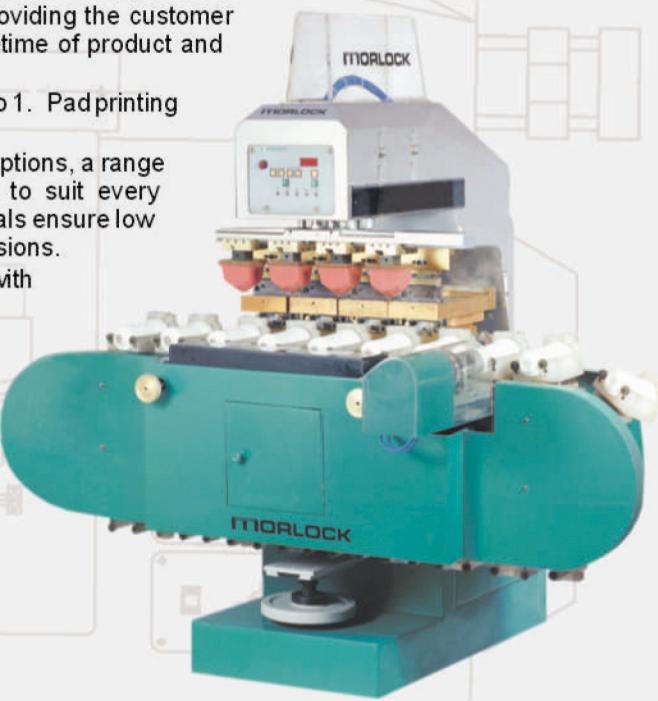

MLM 100F+Linear Conveyor



The complete solution from
Rita Pad

DESCRIPTION	MODEL	MLM 400 S	*MLM 100 D	*MLM 100 T	*MLM 100 F
Cliché Size		200x400x15mm	100x100x10mm	100x100x10mm	100x100x10mm
Printing image max.		135x350	85mm Ø	85mm Ø	85mm Ø
Printing capacity max.		1000 stroke/hr	1000 stroke/hr	1000 stroke/hr	1000 stroke/hr
Height of object max.		150 mm	150 mm	150mm	150mm
Tampon stroke max.		75 mm	75 mm	75 mm	75 mm
Force of pressure max.		829 N	829 N	829 N	829 N
Setting		Each working movement can be independently actuated by push button and mode - selector switch	Each working movement can be independently actuated by push button and mode - selector switch	Each working movement can be independently actuated by push button and mode - selector switch	Each working movement can be independently actuated by push button and mode - selector switch
Control		Electro - Pneumatic	Electro - Pneumatic	Electro - Pneumatic	Electro - Pneumatic
Control Voltage		24 V	24 V	24 V	24 V
Electric supply		220 V, 50 Hz			
Current consumption		20 W	20 W	20 W	20 W
Drive		Pneumatic	Pneumatic	Pneumatic	Pneumatic
Pneumatic connection		Working pressure 5-6 bar nominal width 6 mm	Working pressure 5-6 bar nominal width 6 mm	Working pressure 5-6 bar nominal width 6 mm	Working pressure 5-6 bar nominal width 6 mm
Air consumption max.		1.03 m³/hr.	1.43 m³/hr.	1.43 m³/hr.	1.43 m³/hr.
Dimensions (LxHxW)		1050x1550x550 mm	1050x1550x550 mm	1050x1550x550 mm	1050x1550x550 mm
Weight		200 Kg.	200 Kg.	200 Kg.	200 Kg.

* Available in open & closed cup systems.

* Available in larger print area also.

* Optional accessories : Shuttle, Oval Indexing table, Linear Conveyor.