

EXPERIMENT – 17

CODE:

```
#include <reg51.h>

void serial_ISR(void) interrupt 4
{
    if (RI)
    {
        P1 = SBUF;
        RI = 0;
    }
}


void main(void)
{
    TMOD = 0x20;    // Timer 1, Mode 2
    TH1 = 0xFD;     // 9600 baud rate
    SCON = 0x50;    // UART Mode 1, 8-bit, REN enabled
    TR1 = 1;        // Start Timer 1

    ES = 1;         // Enable serial interrupt
    EA = 1;         // Enable global interrupt

    while (1);
}
```

OUTPUT:

Before interrupt:

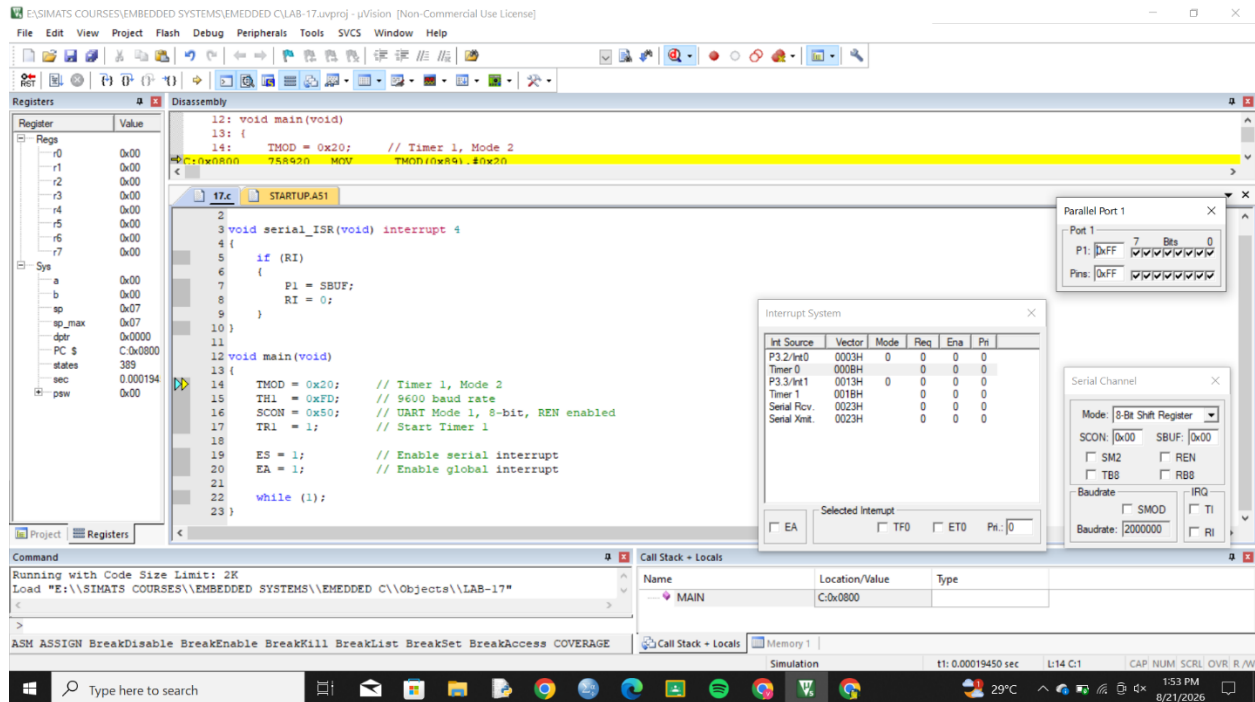

After interrupt:

