
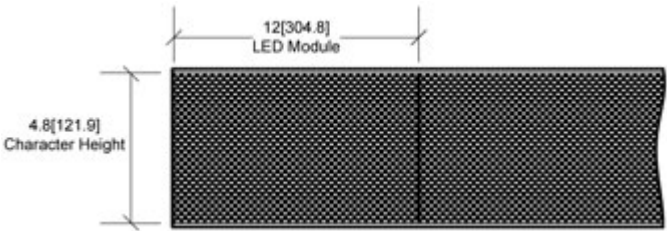
 Duplex outlet (provided by others)

 CAT5/Data (provided by others)



**LED Ticker
Display**

- Weight:
- Dimensions:
- Dim. w/ mount:
- Power:
- LED Board Pixel Matrix :

Wall Mount

- Zee Bracket included with LED Ticker

Mounting Hardware

- Brick: Wedge anchors. Mortar and brick must be of quality to support the anchor.

- Cinder Block: Masonry screws (Tapcon)
- Drywall (wood studs): Lag screw
- Drywall (metal studs): Minimum drywall thickness is ½”.

Provided by Others (NOT the responsibility of Rise Display)

- Confirm supporting structure can support the weight of the displays
- Install high and low voltage per drawing

By signing below you are acknowledging that you have reviewed all the information enclosed and agree that it is accurate. Lead time will not start until approved drawings have been received.

Rise Display

Shawnee, KS 66227

Project:

Company:

The concepts expressed and details shown on this drawing are confidential. Do not reproduce by any means, including electronically without the expressed written consent of Rise Display.© 2009 Rise Display