

# ONWAVE 2 HP<sub>5E</sub>

MULTI-DECK CHILLER



## FEATURES INCLUDE:

White internal  
RAL 9002 grey white external  
RAL 9007 Base Panel  
High efficiency fan motors  
Stainless steel front bumper  
5 levels adjustable shelves + base

Shelf pricing holders  
LED canopy lighting incl. switch  
Electronic temperature control  
Manual night blind  
Castor wheels  
Shelf product fences (optional)

**BAKER**


REFRIGERATION

Visit our website [www.ajbaker.com.au](http://www.ajbaker.com.au) or email us at [email@ajbaker.com.au](mailto:email@ajbaker.com.au)

Image used for illustration only.

# ONWAVE 2 HP<sub>5E</sub>

MULTI-DECK CHILLER

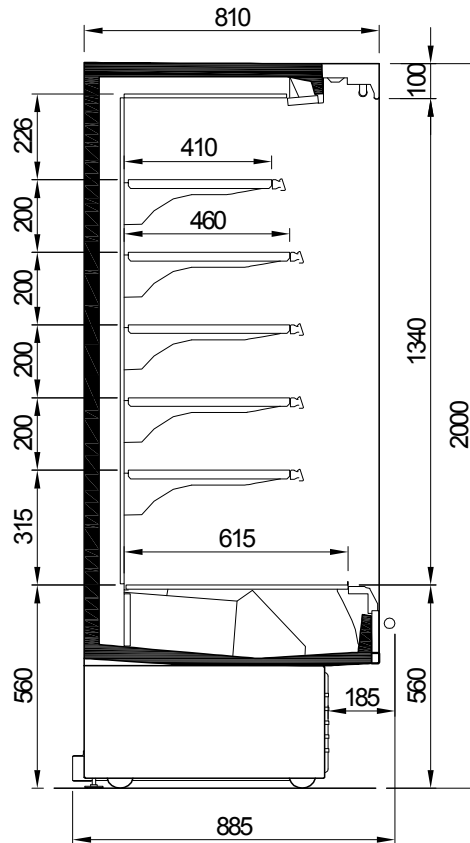

ONWAVE 2 HP 5E	937	1250	1875	2500
* Operating Temp (°C)	+2/+4	+2/+4	+2/+4	+2/+4
Refrigeration	Ventilated/R404a			
Defrost	Automatic			
Power Supply	230V/1Ph/10 Amp plug		230V/1Ph/15 Amp plug	
Operating Current (Amp)	4.8	5.3	8.8	13.9
Nominal Power (W)	1104	1208	1666	2430
Energy Consumption (kWh/24h)	23.5	25.7	35.4	51.6
Lighting Power (W)	39	54	78	108
Display Surface (m <sup>2</sup> )	2.68	3.58	5.37	7.17
Length (mm) with endwall	997	1310	1935	2560
Height incl. castors (mm)	2000	2000	2000	2000
Depth with bumper (mm)	885	885	885	885
Weight with packaging (kg)	260	280	430	500
Weight w/o packaging (kg)	240	260	400	460

\* Climate class 3 (25°C, 60%R/H)