


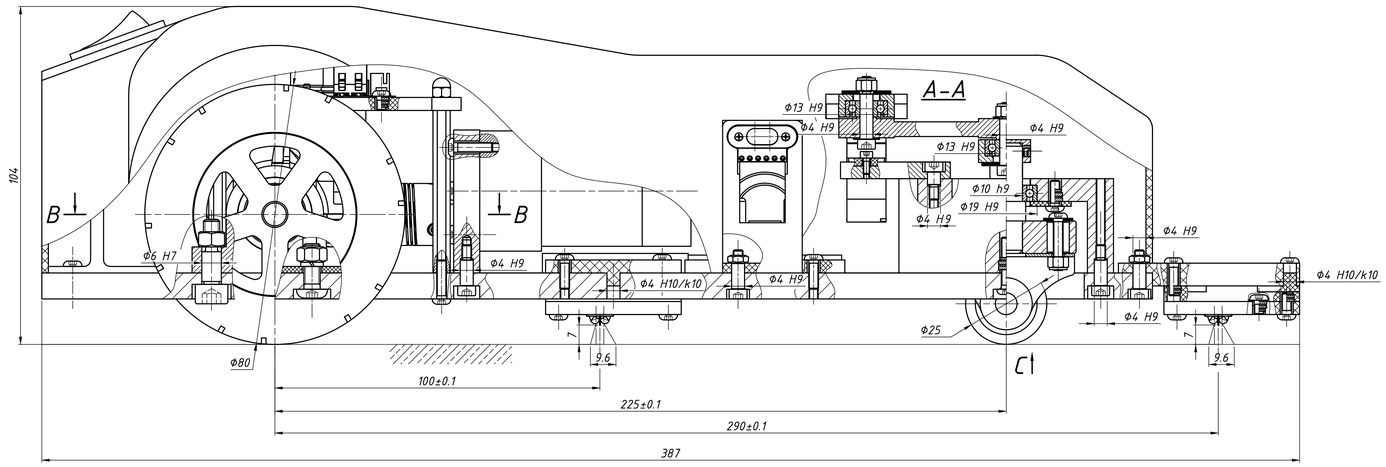


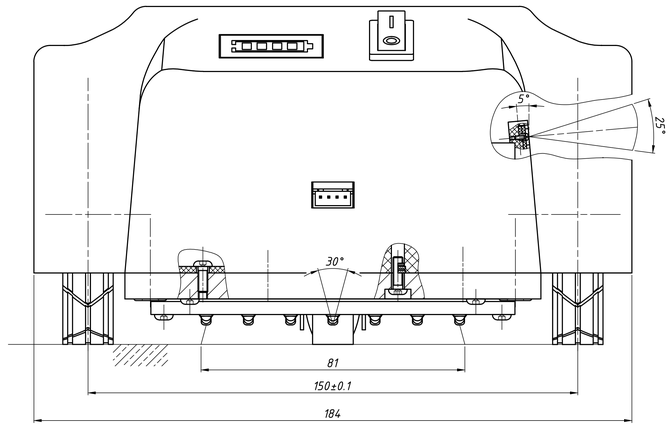

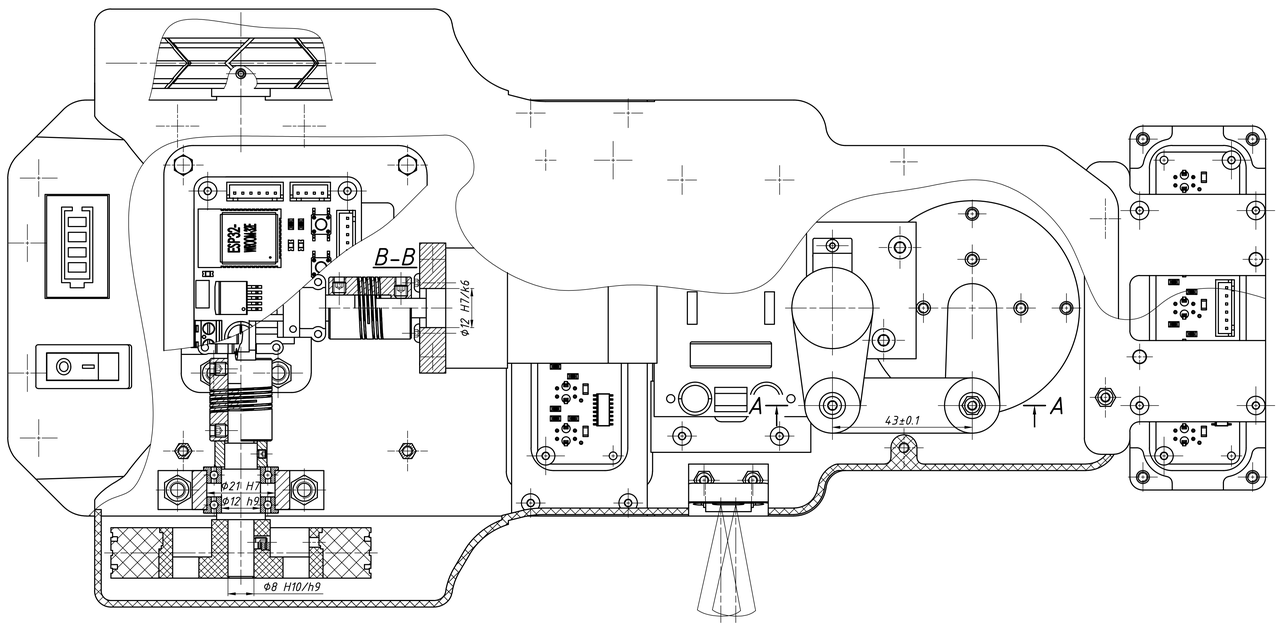



TECHNICAL REQUIREMENTS

1. All 3D printed parts must be post-machined to ensure tolerance at room temperature condition
2. Heat inserts be install with thermal press and flush with mounting surface
3. Tolerances:
- Flexible coupling tolerance: H7/k6
-

No.	Symbol	Name	Qty.	Material	Note
		OBSTACLE PATH AVOIDING LINE-FOLLOWING ROBOT			MECHATRONICS SYSTEM DESIGN PROJECT

Assigned	Full name	
Designer	Do L.A.Khoa	
	Doan T.P.Dong	
	Dang V.Duc	
	Bui H.Hoang	
Instructor	Nguyen T.Tien	
Approver	Nguyen T.Tien	

ASSEMBLY DRAWING

WF LRF

Count	Weight	Ratio
1	1500g	1:5:1

Sheet: Total sheet:

HCMC University of Technology
Mechanical Engineering Faculty
Division of Mechatronics