
REV	DESCRIPTION	DATE	BY
A	FIRST ISSUE	2025-11-02	AK
B	BORE TOLERANCE CHANGED	2026-01-20	AK
C	LEAK TEST ADDED	2026-03-14	MR

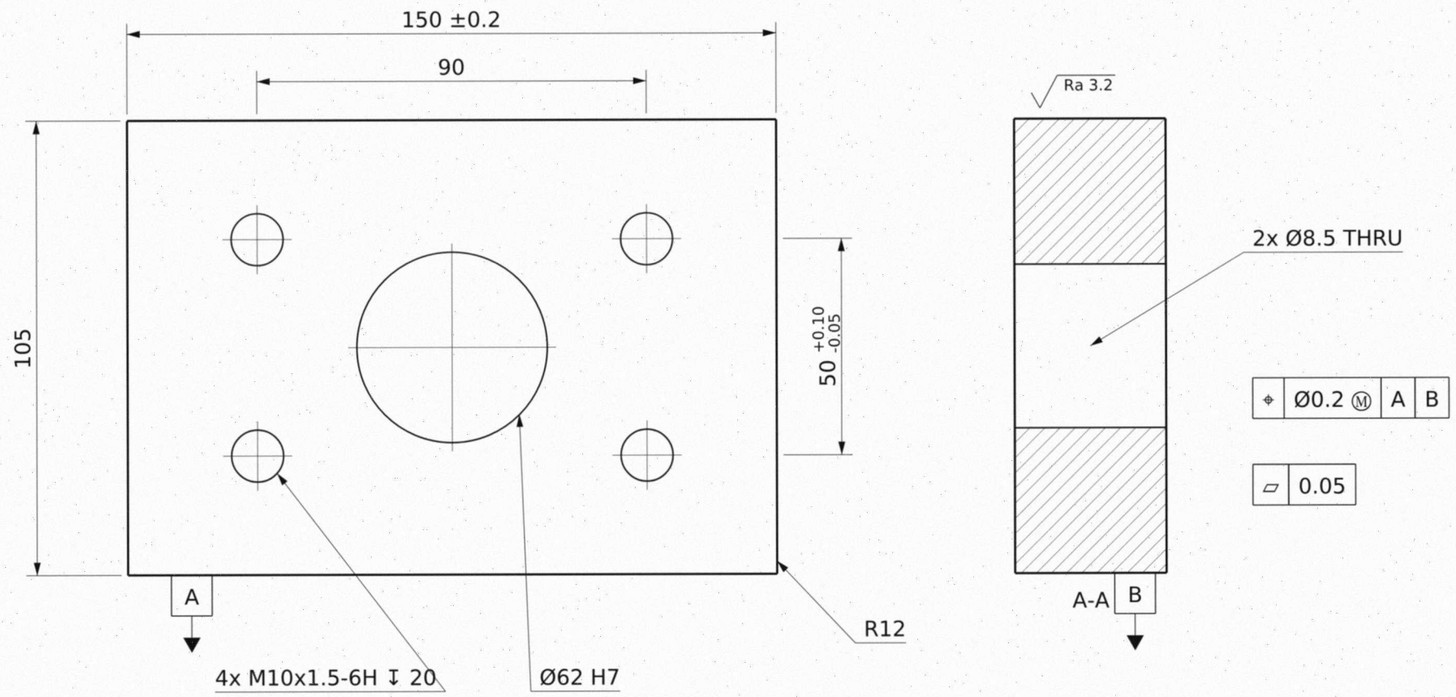

⌖ | Ø0.2 Ⓜ | A | B

▱ | 0.05

NOTES

1. CASTING TOLERANCES TO ISO 8062-3 DCTG 9.
2. MACHINED DIMENSIONS WITHOUT TOLERANCE: ISO 2768-mK.
3. UNSPECIFIED RADII R3. DRAFT ANGLE 2° MAX.
4. PRESSURE TEST AT 6 bar AIR FOR 30 s, NO LEAKAGE ALLOWED.
5. 100% X-RAY TO ASTM E446 LEVEL 2.
6. SAFETY CRITICAL PART. CHARACTERISTICS MARKED <S> TO BE DOCUMENTED.
7. CATHODIC E-COAT 20-35 µm, BLACK. MASK 4x M10 THREADS.
8. HARDNESS 170-230 HBW.
9. BREAK ALL SHARP EDGES ISO 13715 -0.3.

TITLE		MATERIAL	
PUMP HOUSING		EN-GJS-500-7 EN 1563	
PART NO.	DRAWING NO.	REV	
CV-100-2231	D-100-2231	C	
GENERAL TOLERANCE	SURFACE ROUGHNESS	MASS	
ISO 8062-3 DCTG 9	Ra 12.5	4.85 kg	
SCALE	DATE	SHEET	DRAWN
1:2	2026-03-14	1 OF 1	A. KOVAC