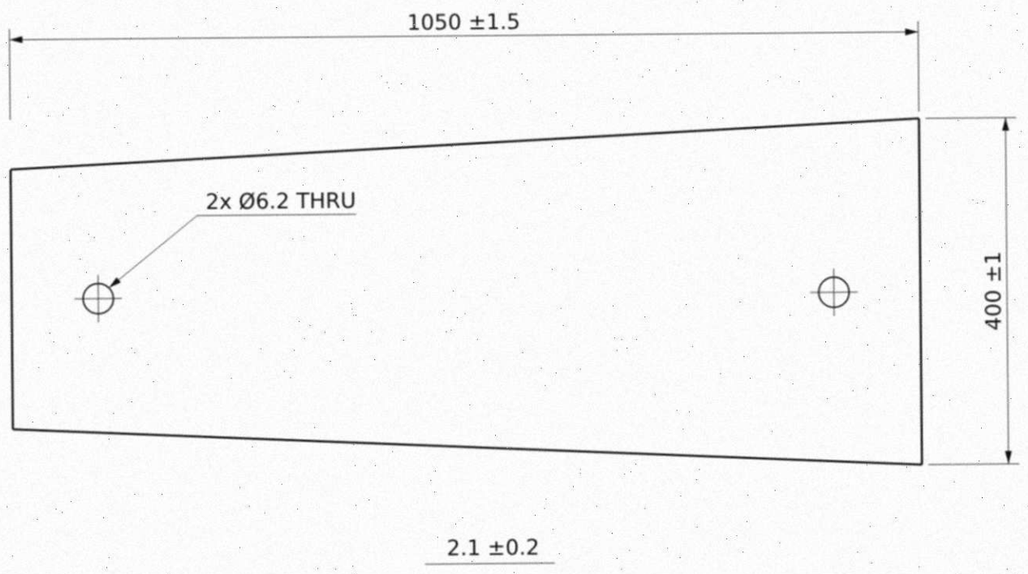


NOTES

1. LAMINATE: 8 PLIES CARBON FIBRE EPOXY PREPREG, LAY-UP [0/90/+45/-45]s.
2. CURE IN AUTOCLAVE AT 180 °C, 7 bar.
3. 100% ULTRASONIC C-SCAN INSPECTION, NO DELAMINATION ALLOWED.
4. TRIM EDGES BY WATERJET, PROFILE TOLERANCE ±0.5.
5. A-SURFACE CLEAR COAT 40-60 µm.
6. DIMENSIONS IN MILLIMETRES.

TITLE: ROOF BOW PANEL		MATERIAL: CFRP PREPREG, EPOXY, 8 PLIES	
PART NO.: RB-0450-CF	DRAWING NO.: RB-0450	REV: A	
GENERAL TOLERANCE: ISO 2768-cL	MASS: 0.95 kg	UNITS: mm	
SCALE: 1:5	DATE: 2026-09-11	SHEET: 1 OF 1	APPROVED: L. MOREAU