


SPUR GEAR · TRANSMISSION OUTPUT

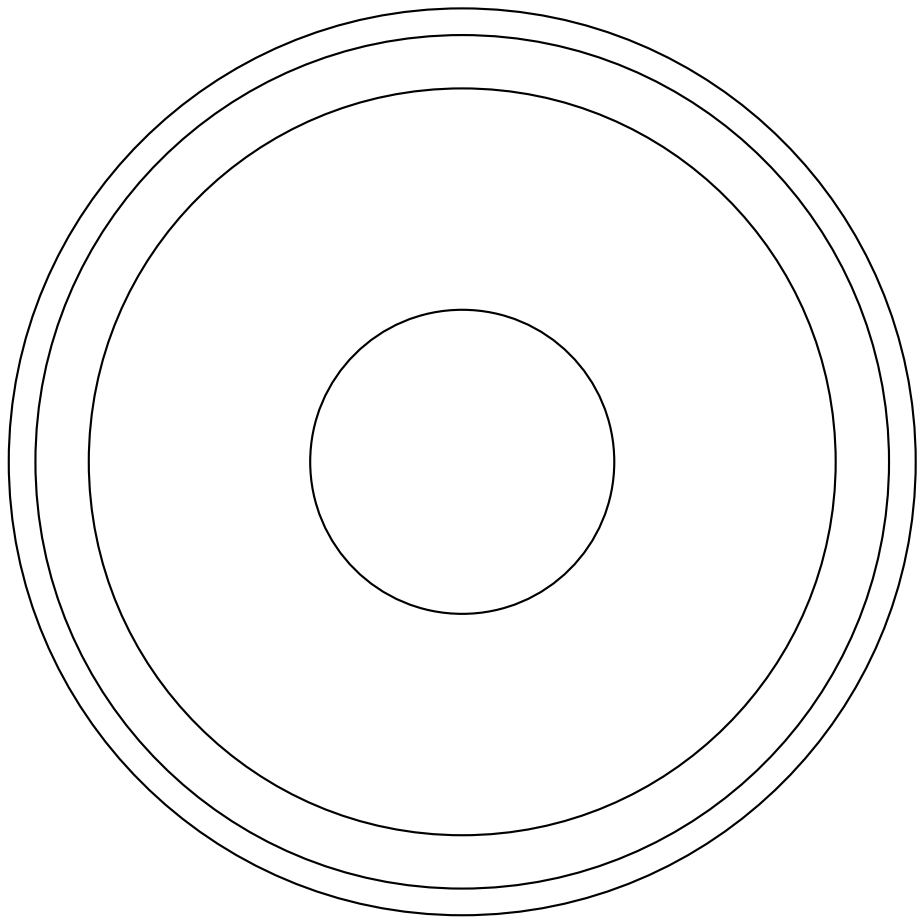

NORMAL MODULE	mn	3.000 mm
NUMBER OF TEETH	z	40
PRESSURE ANGLE	a	20 deg
HELIX ANGLE	b	0 deg (SPUR)
FACE WIDTH	b	30.0 mm
TIP DIAMETER	da	120.0 mm
BORE		DIA 40.0 H7
QUALITY CLASS		ISO 1328 CLASS 7
MATERIAL		20MnCr5 (1.7147)
HEAT TREATMENT		CARBURISE + QUENCH
CASE DEPTH		0.6 - 0.9 mm 58-62 HRC