


SPUR GEAR · TRANSMISSION OUTPUT

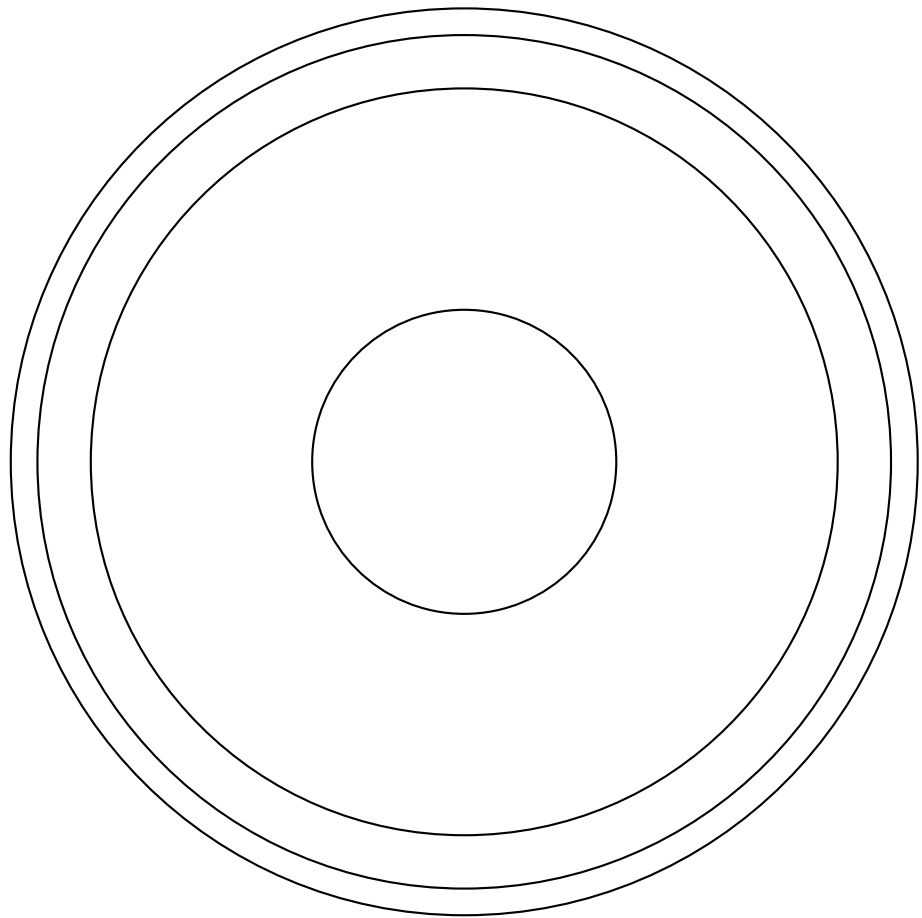

NORMAL MODULE m_n	3.000 mm
NUMBER OF TEETH z	38
PRESSURE ANGLE α	20 deg
HELIX ANGLE β	0 deg (SPUR)
FACE WIDTH b	30.0 mm
TIP DIAMETER d_a	120.0 mm
BORE	DIA 40.0 H7
QUALITY CLASS	ISO 1328 CLASS 7
MATERIAL	20MnCr5 (1.7147)
HEAT TREATMENT	CARBURISE + QUENCH
CASE DEPTH	0.6 - 0.9 mm 58-62 HRC