

REV	DESCRIPTION	DATE	BY
A	FIRST ISSUE	2025-11-02	AK
B	BORE TOLERANCE CHANGED	2026-01-20	AK
C	LEAK TEST ADDED	2026-03-14	MR

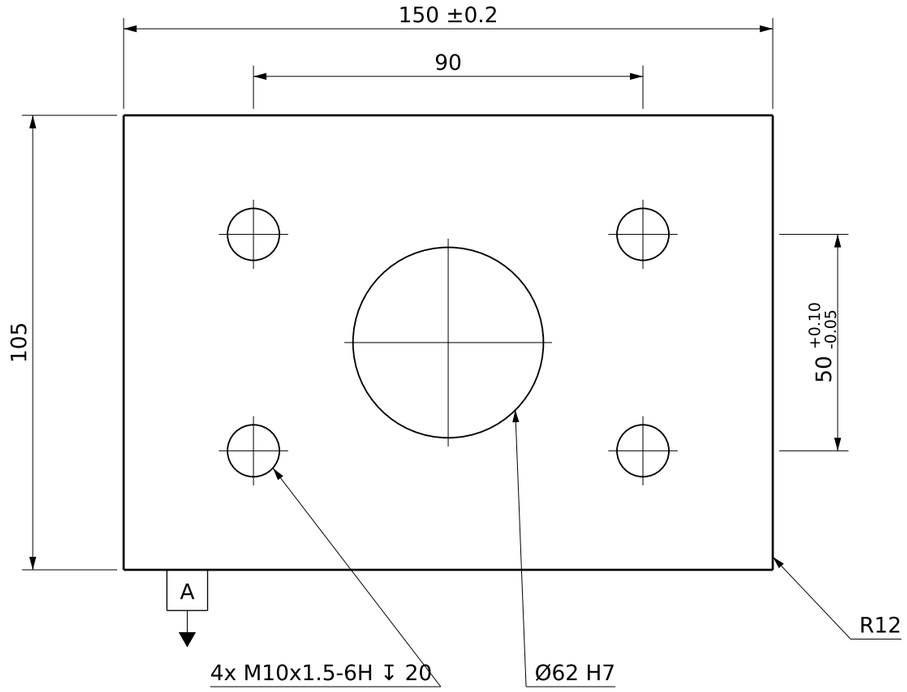

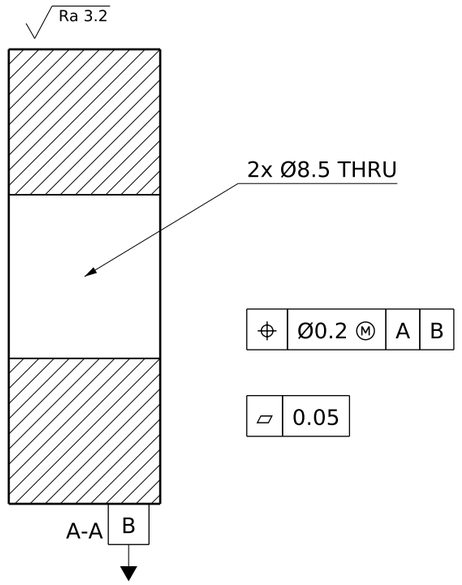

⌖ | Ø0.2 Ⓜ | A | B

▱ | 0.05

NOTES

1. CASTING TOLERANCES TO ISO 8062-3 DCTG 9.
2. MACHINED DIMENSIONS WITHOUT TOLERANCE: ISO 2768-mK.
3. UNSPECIFIED RADII R3. DRAFT ANGLE 2° MAX.
4. PRESSURE TEST AT 6 bar AIR FOR 30 s, NO LEAKAGE ALLOWED.
5. 100% X-RAY TO ASTM E446 LEVEL 2.
6. SAFETY CRITICAL PART. CHARACTERISTICS MARKED <S> TO BE DOCUMENTED.
7. CATHODIC E-COAT 20-35 µm, BLACK. MASK 4x M10 THREADS.
8. HARDNESS 170-230 HBW.
9. BREAK ALL SHARP EDGES ISO 13715 -0.3.

TITLE: PUMP HOUSING		MATERIAL: EN-GJS-500-7 EN 1563	
PART NO.: CV-100-2231	DRAWING NO.: D-100-2231	REV: C	
GENERAL TOLERANCE: ISO 8062-3 DCTG 9	SURFACE ROUGHNESS: Ra 12.5	MASS: 4.85 kg	
SCALE: 1:2	DATE: 2026-03-14	SHEET: 1 OF 1	DRAWN: A. KOVAC