



OUTPUTS:

1. Hub:


Step 1:

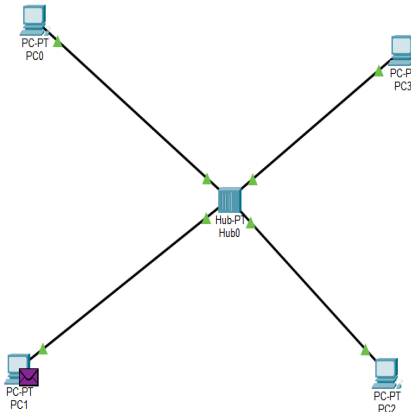

Step :2

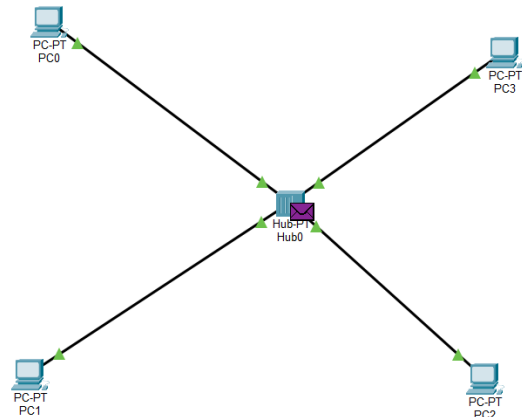

Step 3:

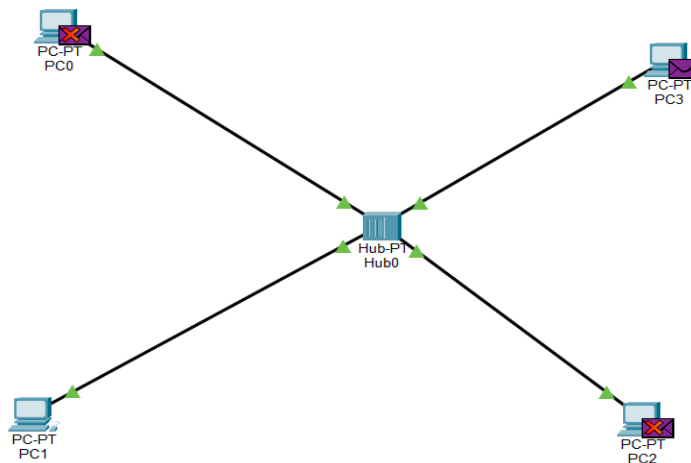

Ping:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:


Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time=7ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms


C:\>|
```

2. Switch:


Step 1:

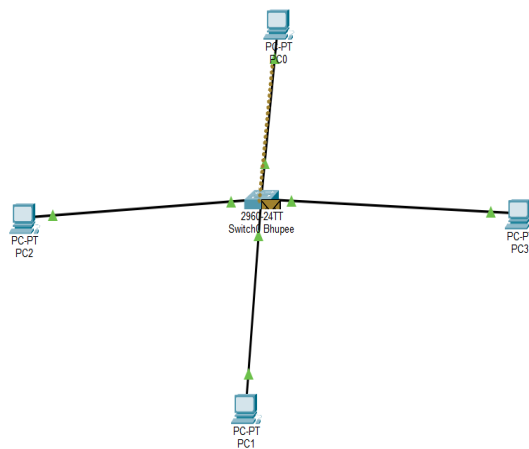


Step 2:

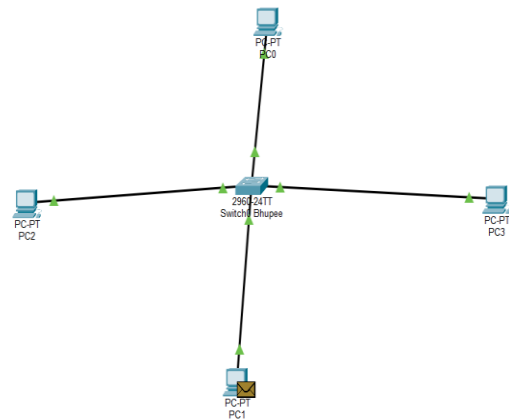

Step 3:

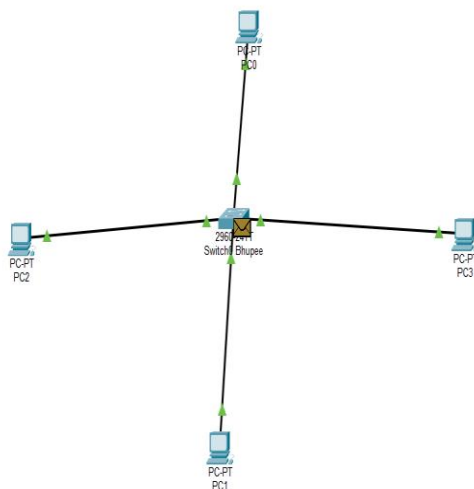

Step 4:

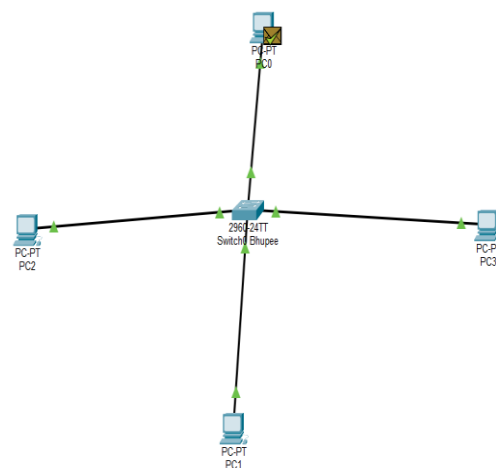

3. Bridge:

Ping:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.6

Pinging 192.168.1.6 with 32 bytes of data:


Reply from 192.168.1.6: bytes=32 time=1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=10ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 3ms


C:\>
```

Output:


Step 1:

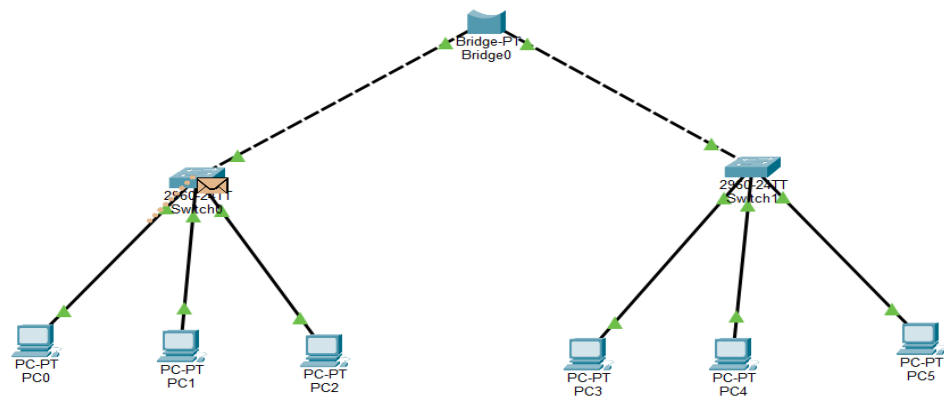


Step 2:

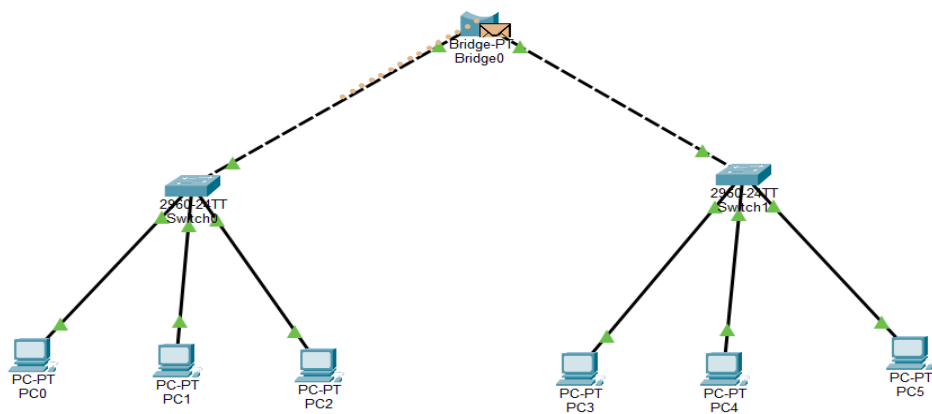

Step 3:

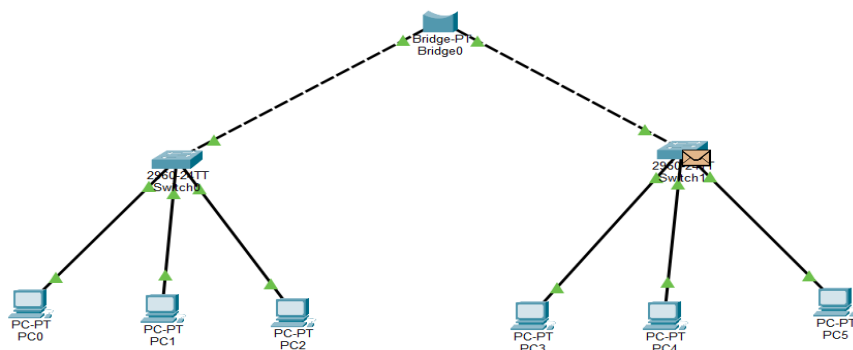

Step 4:

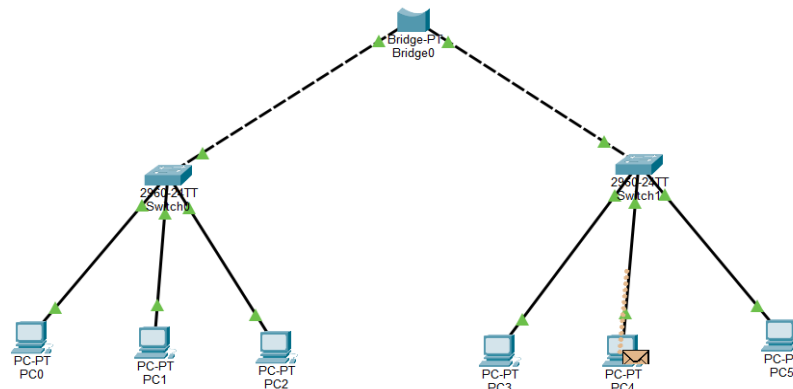

4. Router:

Ping:

```
C:\>ping 10.10.10.2


Pinging 10.10.10.2 with 32 bytes of data:

Request timed out.
Reply from 10.10.10.2: bytes=32 time=1ms TTL=127
Reply from 10.10.10.2: bytes=32 time<1ms TTL=127
Reply from 10.10.10.2: bytes=32 time=1ms TTL=127


Ping statistics for 10.10.10.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```


Step 1:

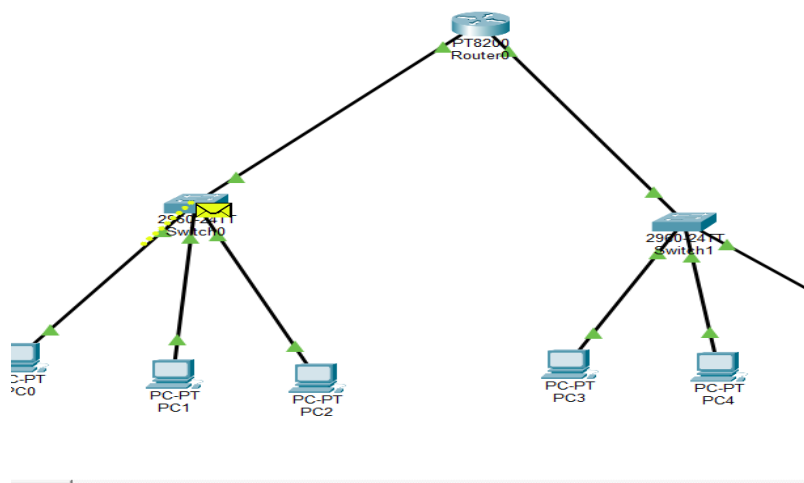


Step 2:

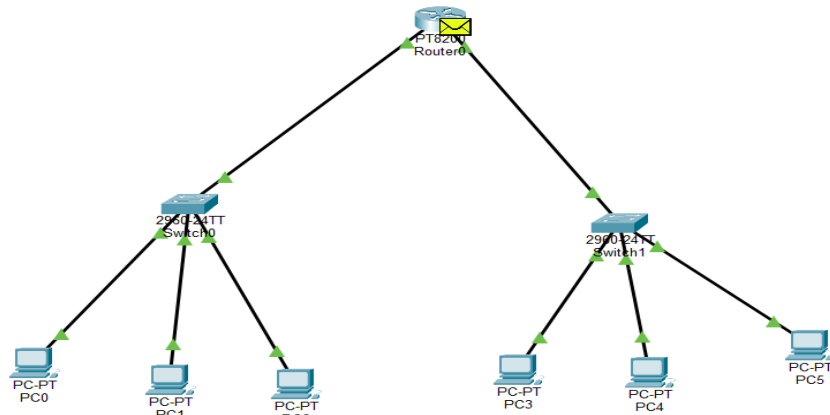

Step 3:

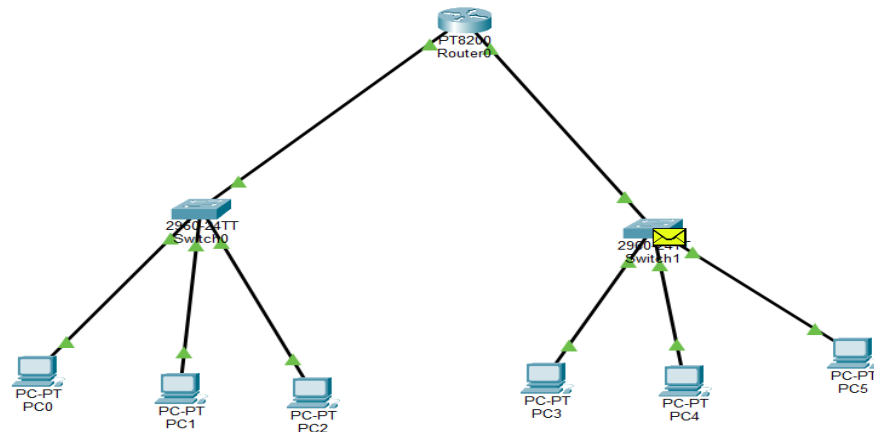

Step 4:

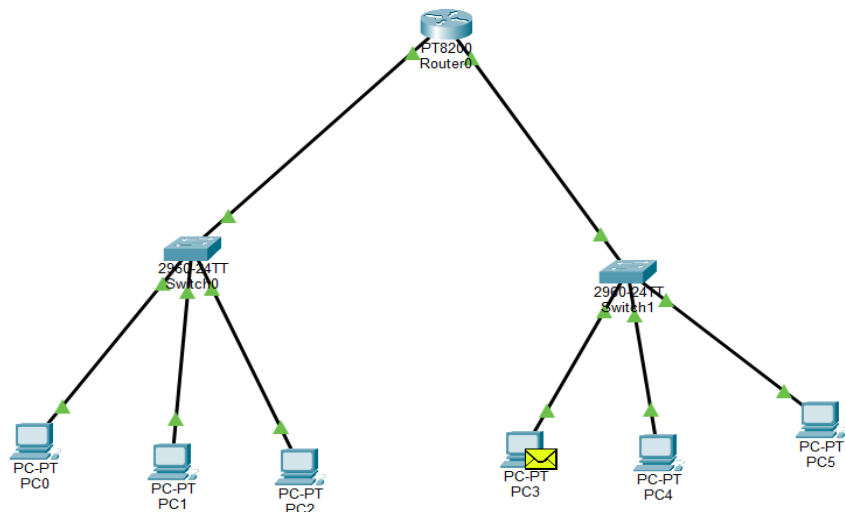

5. Repeater:

Ping:

```
C:\>ping 192.168.1.7


Pinging 192.168.1.7 with 32 bytes of data:

Reply from 192.168.1.7: bytes=32 time=3ms TTL=128
Reply from 192.168.1.7: bytes=32 time=1ms TTL=128
Reply from 192.168.1.7: bytes=32 time=7ms TTL=128
Reply from 192.168.1.7: bytes=32 time=1ms TTL=128


Ping statistics for 192.168.1.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 7ms, Average = 3ms

C:\>
```


Step 1:

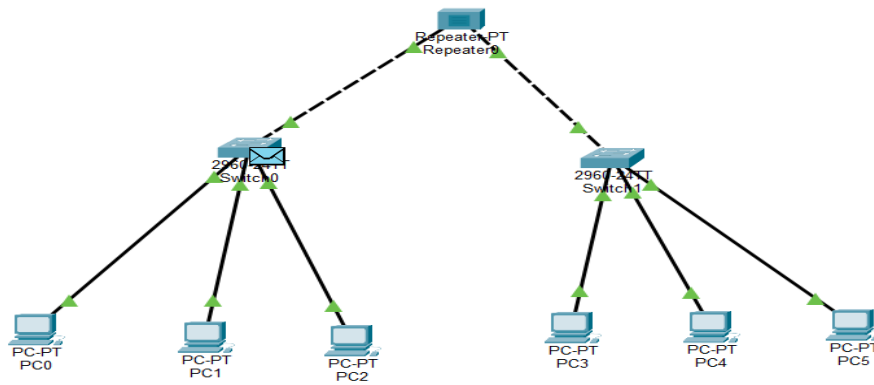

Step 2:

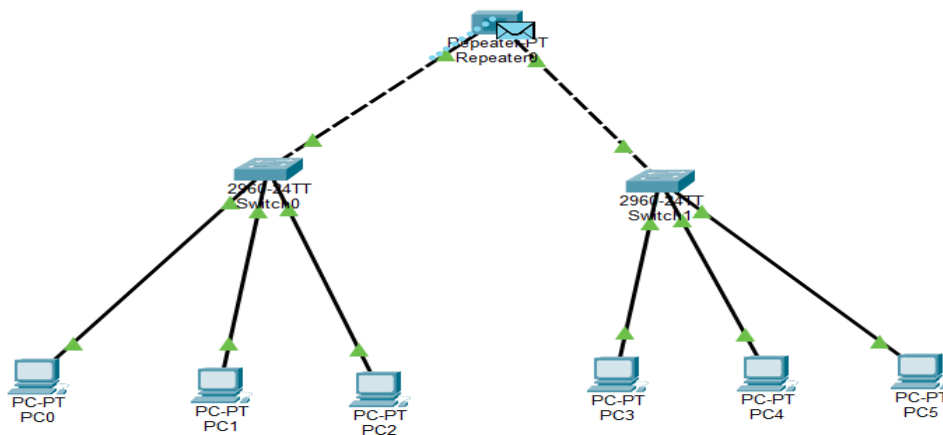

Step 3:

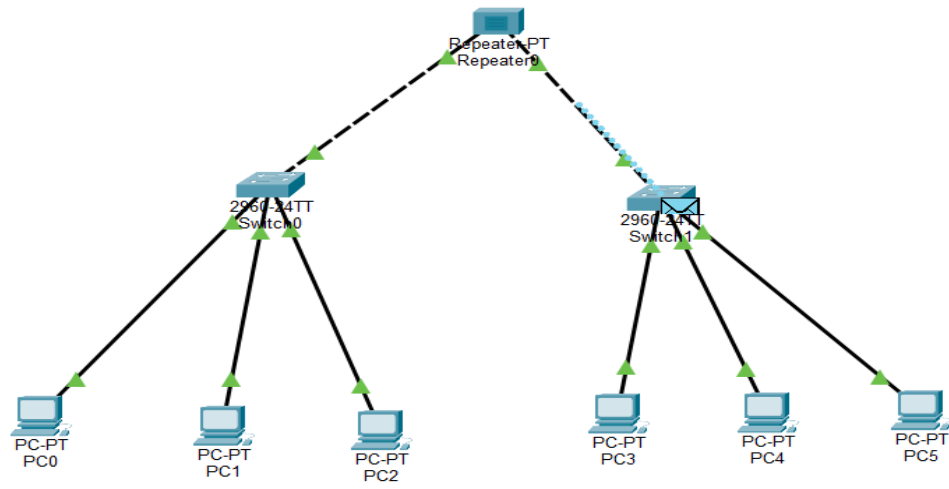

Step 4:

