


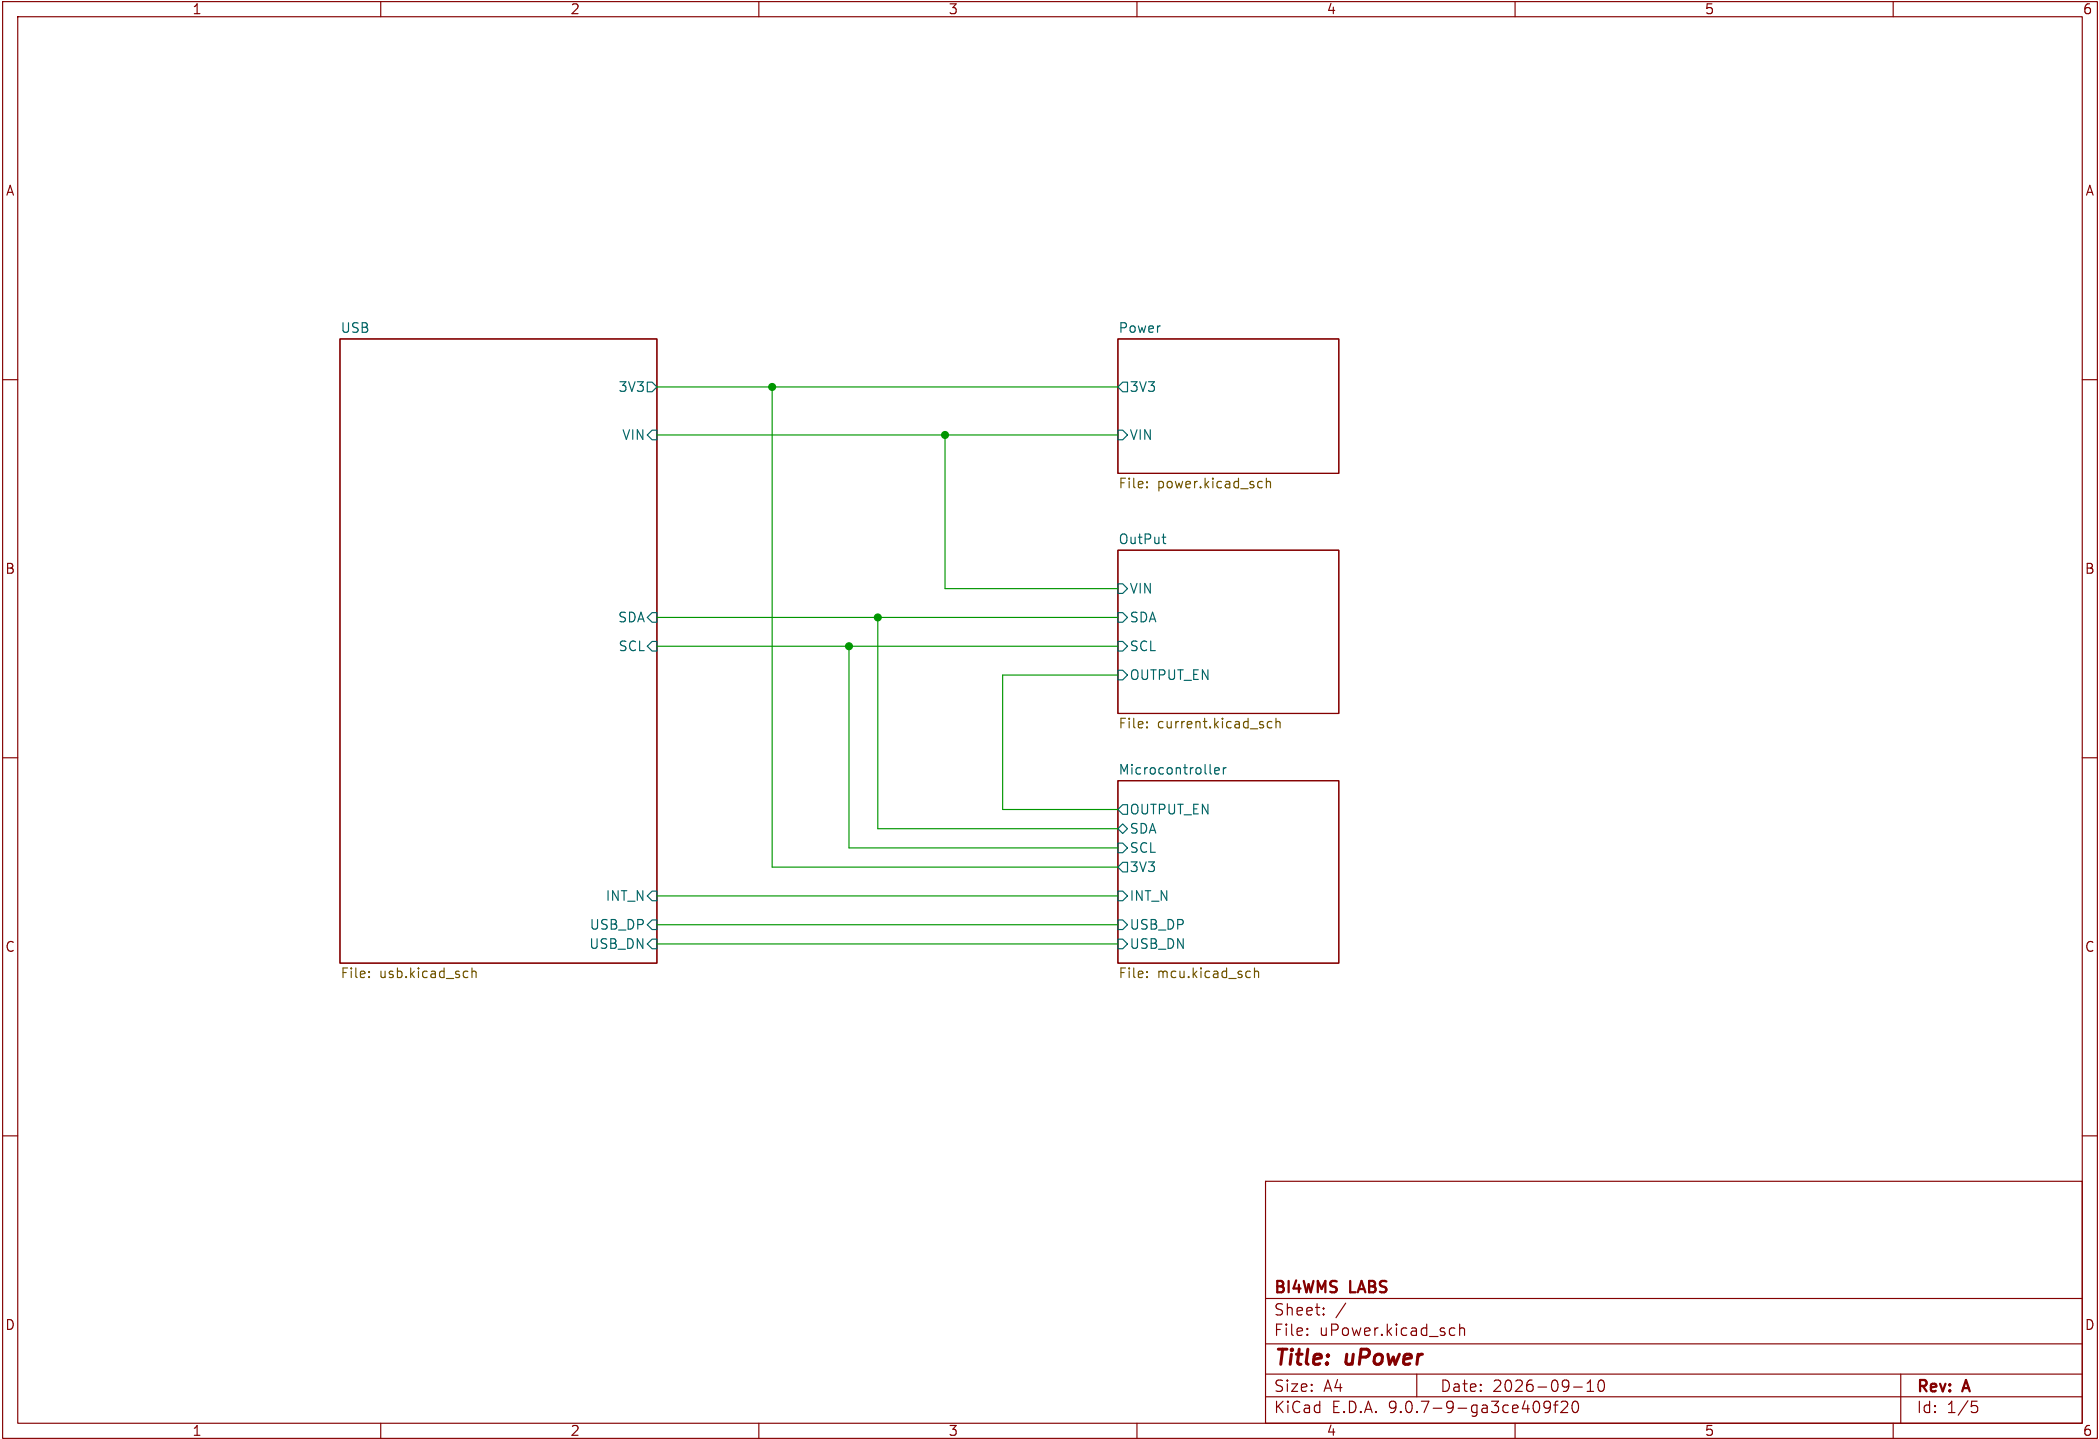

BI4WMS LABS

Sheet: /
File: uPower.kicad_sch

Title: uPower


Size: A4 Date: 2026-09-10

KiCad E.D.A. 9.0.7-9-ga3ce409f20

Rev: A

Id: 1/5

TypeC PD

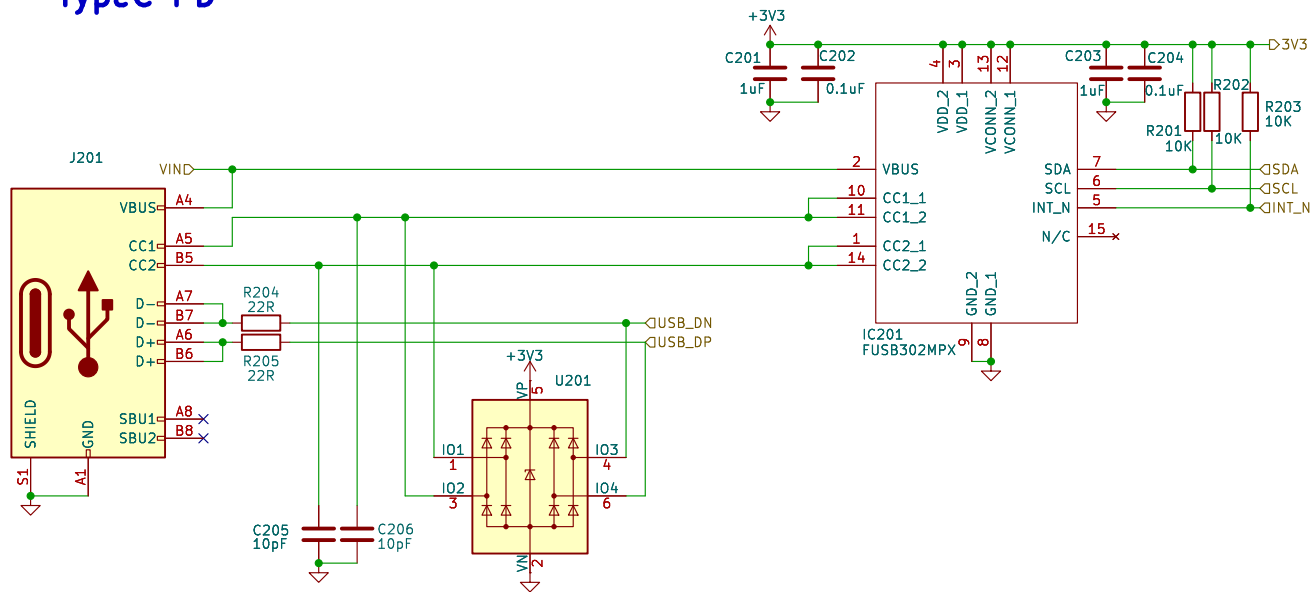

BI4WMS LABS

Sheet: /USB/
File: usb.kicad_sch


Title: uPower

Size: A4	Date: 2026-09-10
----------	------------------

KiCad E.D.A. 9.0.7-9-ga3ce409f20

Rev: A

Id: 2/5

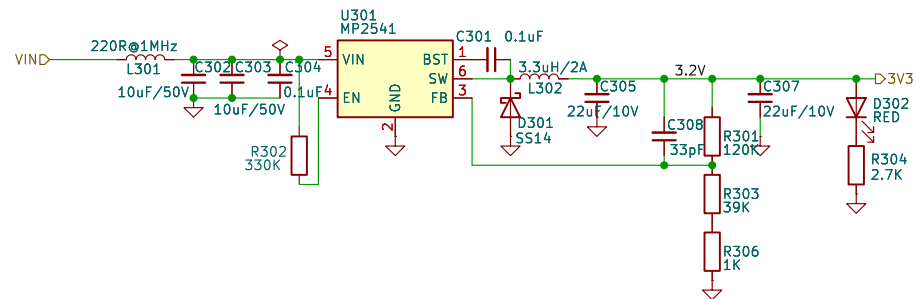

Power Manegmant




BI4WMS LABS

Sheet: /Power/
File: power.kicad_sch

Title: uPower

Size: A4 Date: 2026-09-10
KiCad E.D.A. 9.0.7-9-ga3ce409f20


Rev: A
Id: 3/5

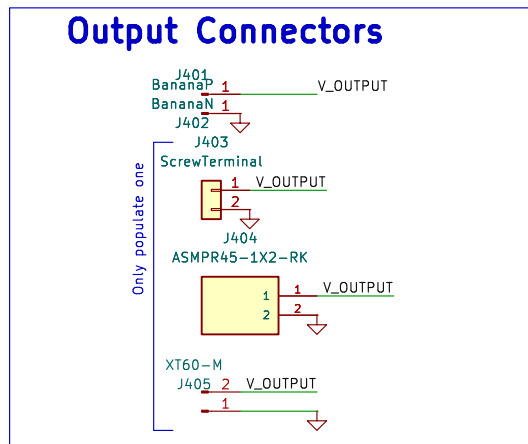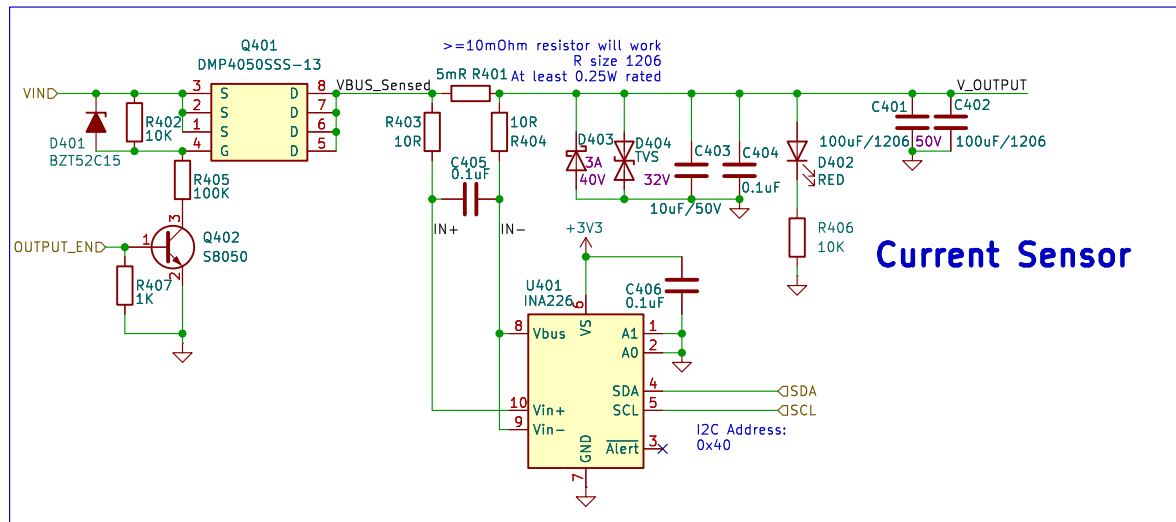


Output connector consideration:

- + Banana Jack -> Standard for power supply
- + Screw terminal 3.5mm, 5mm pitch both introduce gap in the case and result in dust
- + Terminal block plug-in
- + XT60 -> Doable
- + XT30 -> Doable
- + DC barrel jack - Tend to rated up to only 2A, fire hazard.
- + Anderson Powerpole -> Slightly large for given space


MCU_SYS

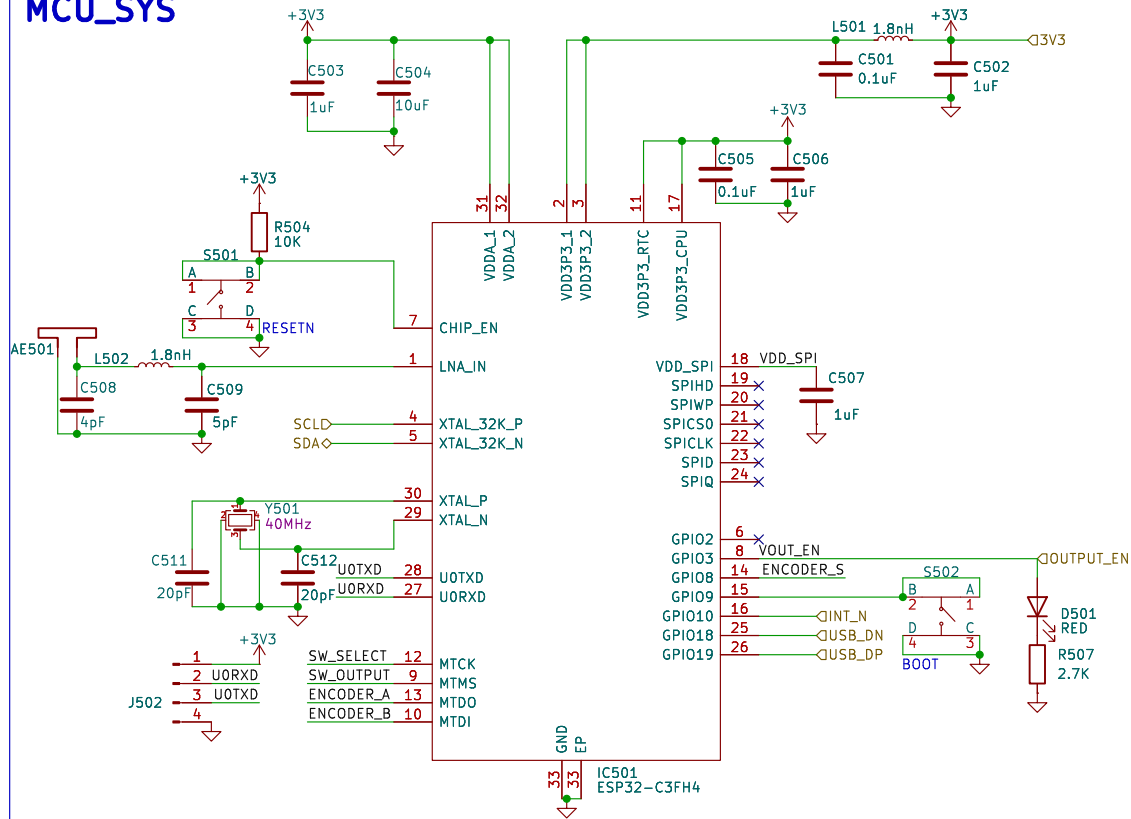


Rotary Encoder

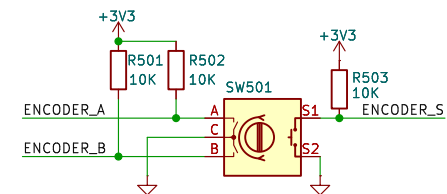

OLED_Connector



KEYs

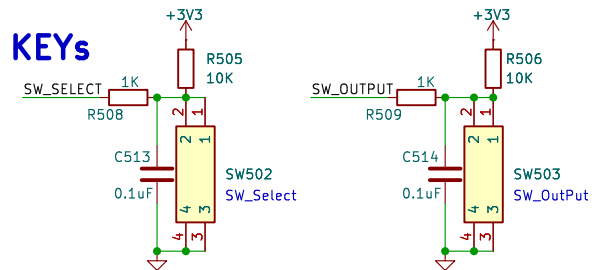

BI4WMS LABS

Sheet: /Microcontroller/
File: mcu.kicad_sch

Title: uPower

Size: A4 Date: 2026-09-10

KiCad E.D.A. 9.0.7-9-ga3ce409f20

Rev: A

Id: 5/5